



BOMINOX
stainless steel pumps

CURVAS CARACTERÍSTICAS
PERFORMANCE CURVES

MULTI

50 Hz

Bominox, S.A.

Ctra. de Banyoles, km 14
17844 CORNELLÀ DEL TERRI
(Girona) Spain

Tel. +34 972 595 020

Fax +34 972 595 120

E-mail: info@bominox.com


www.bominox.com





CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES

Bomba tipo / Pump type	MT-1	Potencia / Power	1.5-2.2-3-4-5.5 kW	2-3-4-5.5-7.5 hp
rpm		2900	Rodete / Impeller Ø (mm)	Cerrado 5p / Closed 5p
Hz	50	Ø asp / Ø inlet	DN-40	
Código / Code	CMT5N-101	Ø imp / Ø outlet	DN-32	

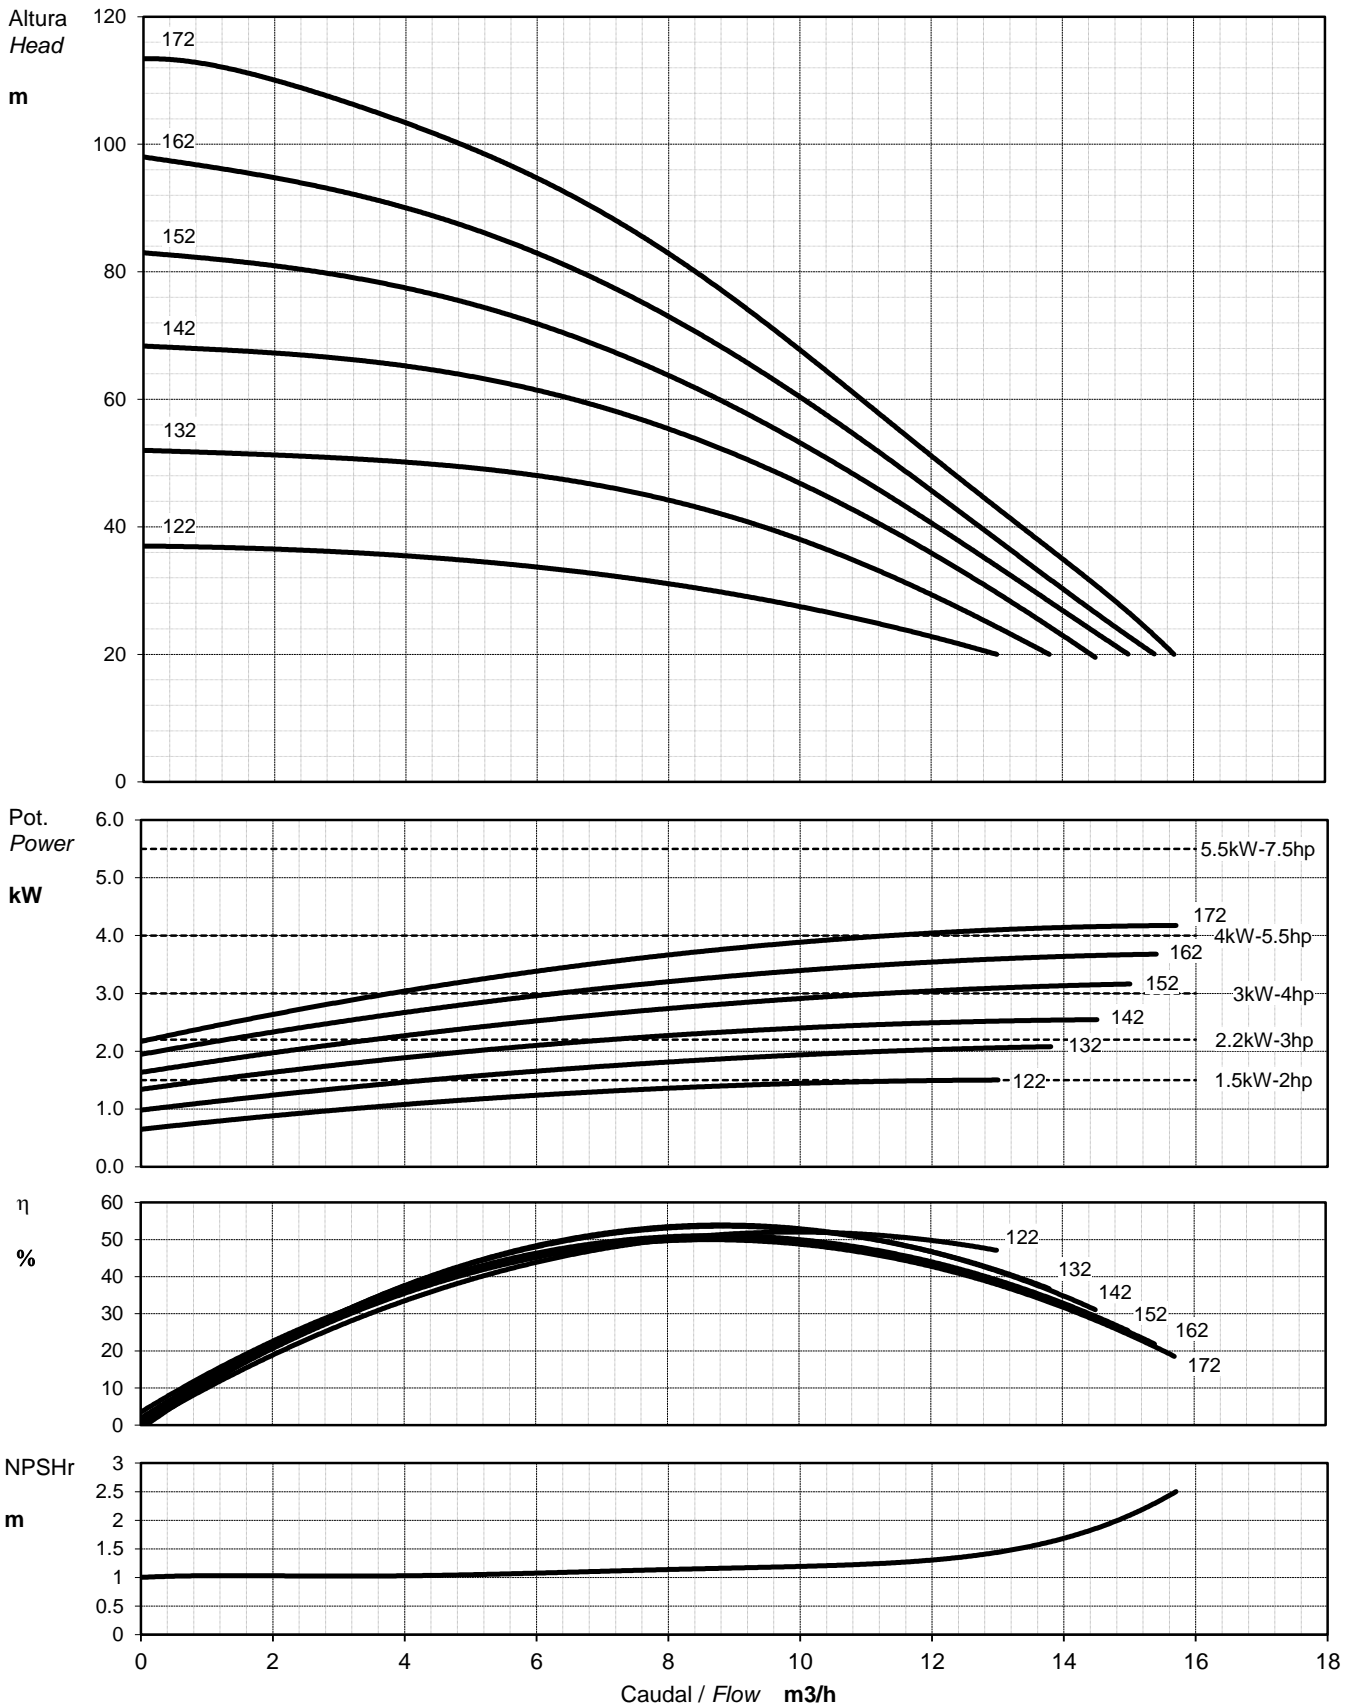



CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES

Bomba tipo / Pump type	MT-2	Potencia / Power	3-4-5.5-7.5-11-15 kW	4-5.5-7.5-10-15-20 hp
rpm	2900	Rodete / Impeller Ø (mm)	Cerrado 5p / Closed 5p	165
Hz	50	Ø asp / Ø inlet	DN-65	
Código / Code	CMT5N-102	Ø imp / Ø outlet	DN-50	

