



**BOMINOX**  
stainless steel pumps

CURVAS CARACTERÍSTICAS  
*PERFORMANCE CURVES*

**SOLID-ATEX**

*50 Hz*

**Bominox, S.A.**

Ctra. de Banyoles, km 14  
17844 CORNELLÀ DEL TERRI  
(Girona) Spain

Tel. +34 972 595 020

Fax +34 972 595 120

E-mail: [info@bominox.com](mailto:info@bominox.com)

[www.bominox.com](http://www.bominox.com)




ISO 9001:2015



## CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES


Bomba tipo / Pump type	<b>DA-0</b>	Potencia / Power	<b>0.37-0.55 kW</b>	<b>0.5-0.75 hp</b>
rpm	<b>2900</b>	Rodete / Impeller Ø (mm)	<b>Abierto 3p / Open 3p</b>	<b>max 95 - min 60</b>
Hz	<b>50</b>	Ø asp / Ø inlet	<b>DN-32</b>	
Código / Code	<b>CDS6N-100</b>	Ø imp / Ø outlet	<b>DN-25</b>	

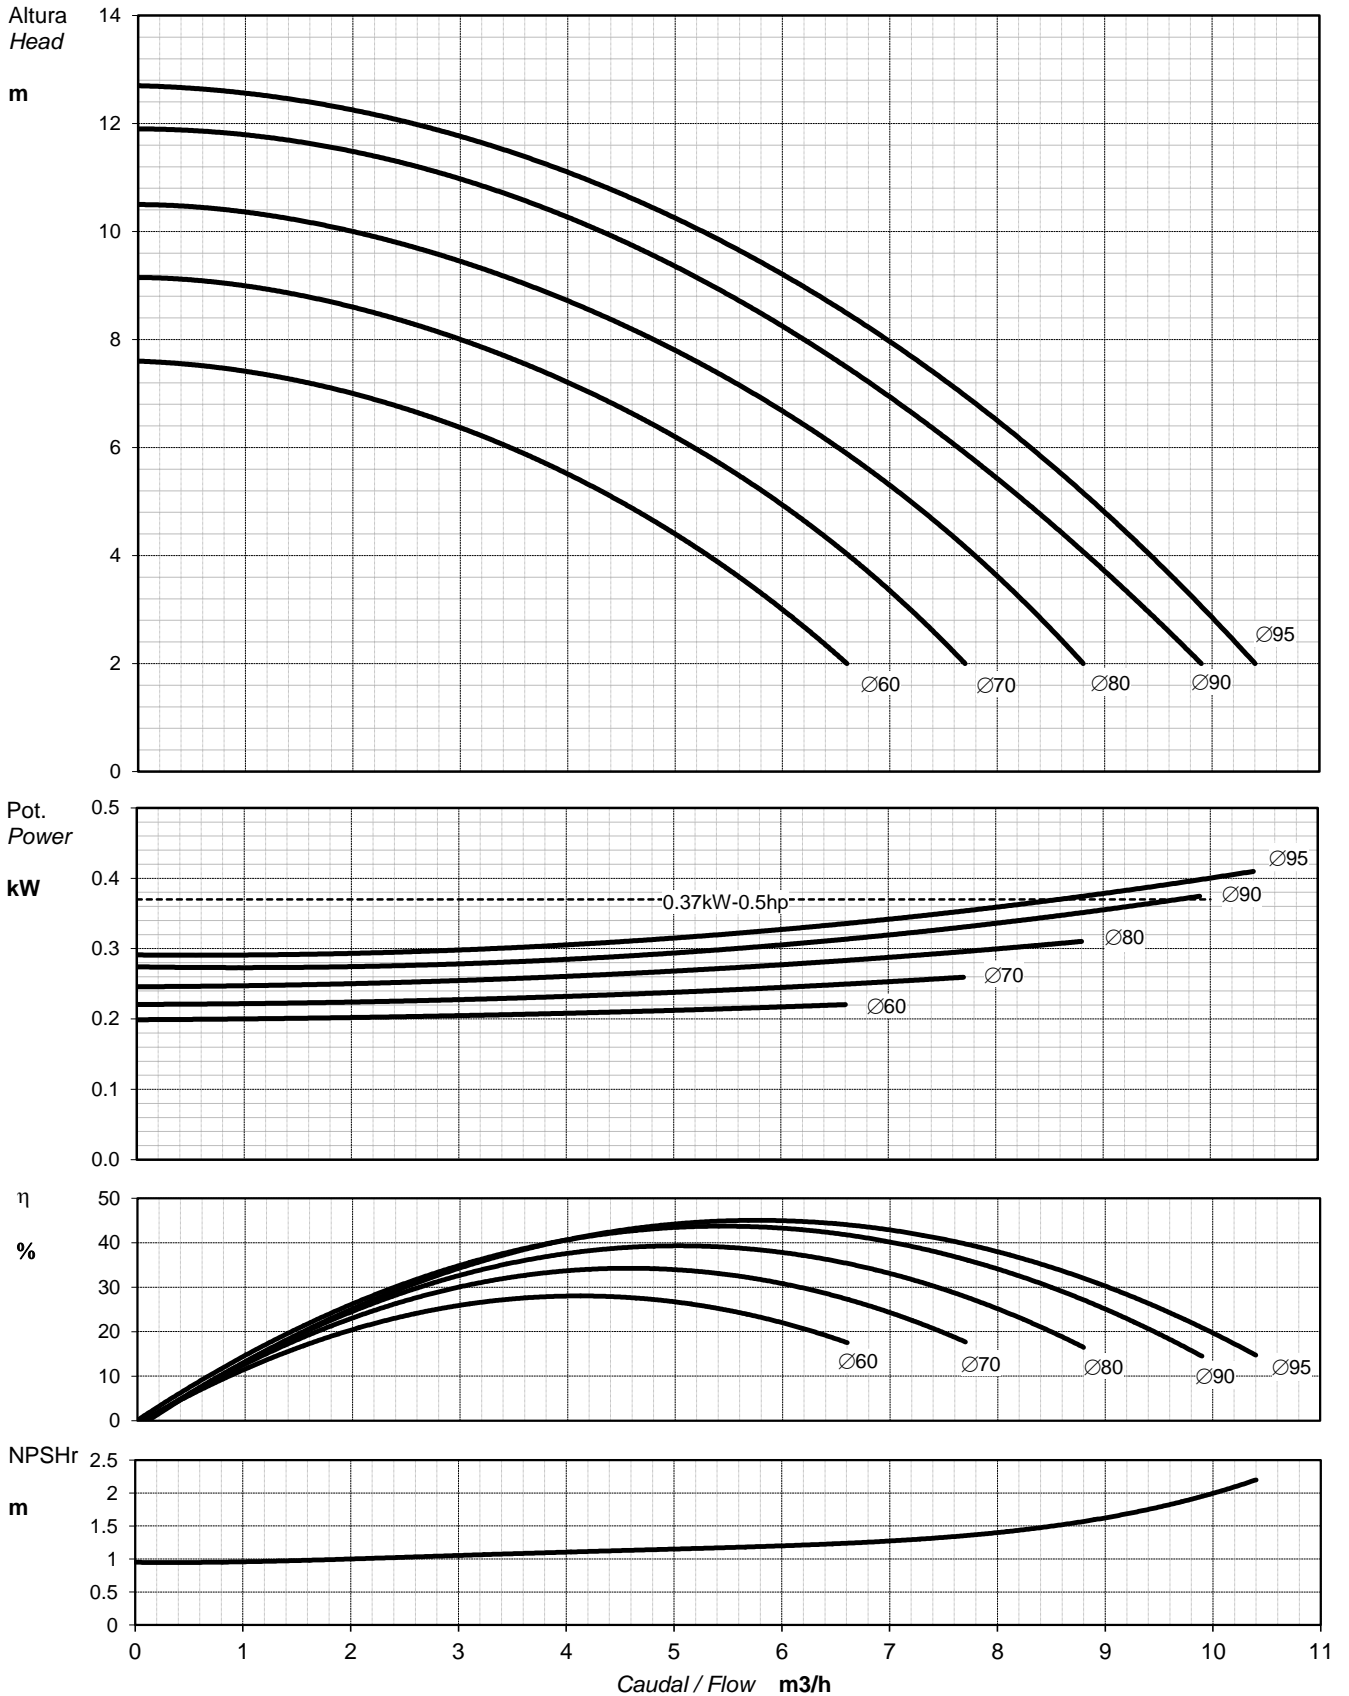



## CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES


Bomba tipo / Pump type	<b>DA-11</b>	Potencia / Power	0.37-0.55-0.75-1.1 kW	0.5-0.75-1-1.5 hp
rpm	<b>2900</b>	Rodete / Impeller Ø (mm)	<b>Semiabierto 6p / Semi-open 6p</b>	<b>max 135 - min 80</b>
Hz	<b>50</b>	Ø asp / Ø inlet	<b>40</b>	
Código / Code	<b>CDS6N-101</b>	Ø imp / Ø outlet	<b>40</b>	

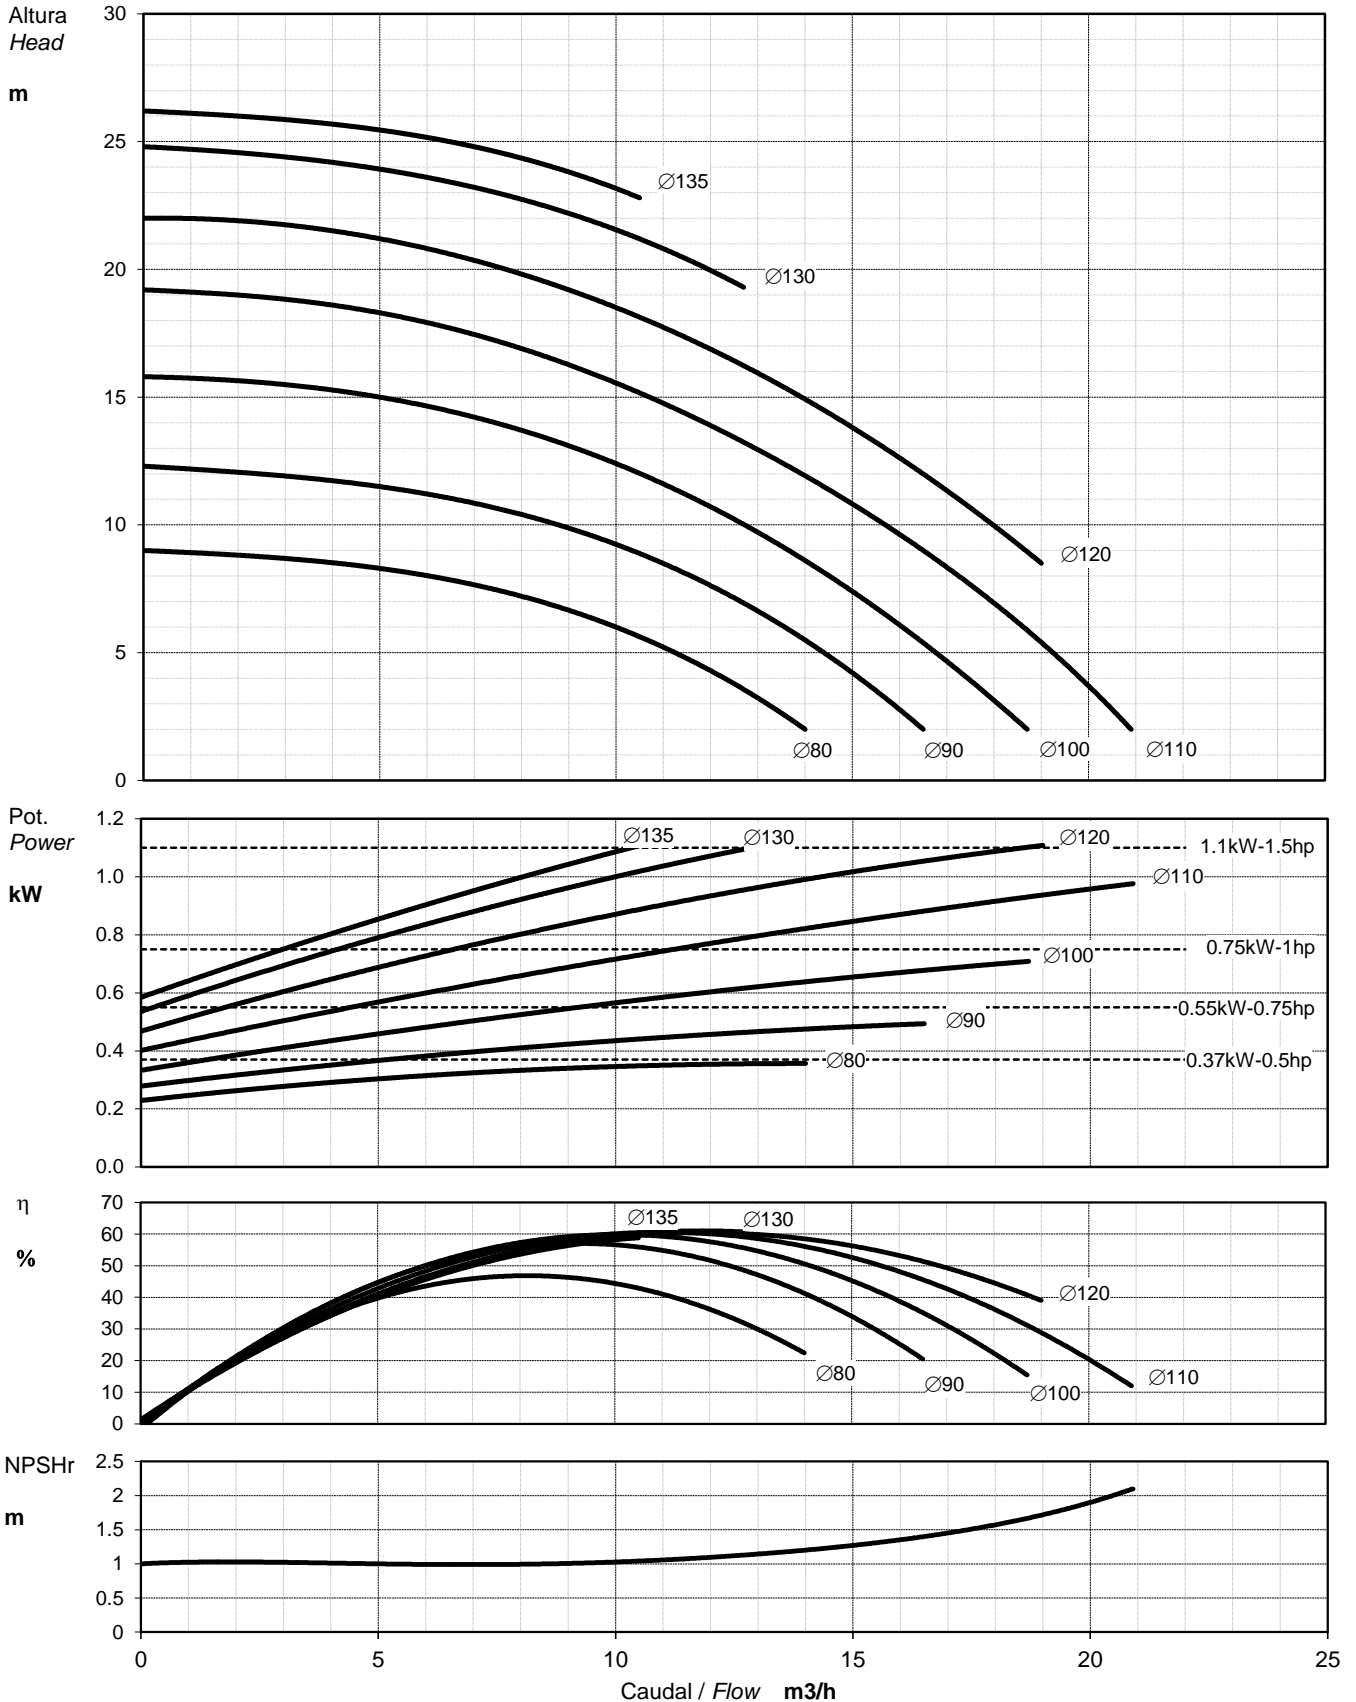



## CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES


Bomba tipo / Pump type	<b>DA-12</b>	Potencia / Power	0.75-1.1-1.5-2.2 kW	1-1.5-2-3 hp
rpm	<b>2900</b>	Rodete / Impeller Ø (mm)	<b>Semiabierto 6p / Semi-open 6p</b>	max 135 - min 80
Hz	<b>50</b>	Ø asp / Ø inlet	<b>50</b>	
Código / Code	<b>CDS6N-102</b>	Ø imp / Ø outlet	<b>40</b>	

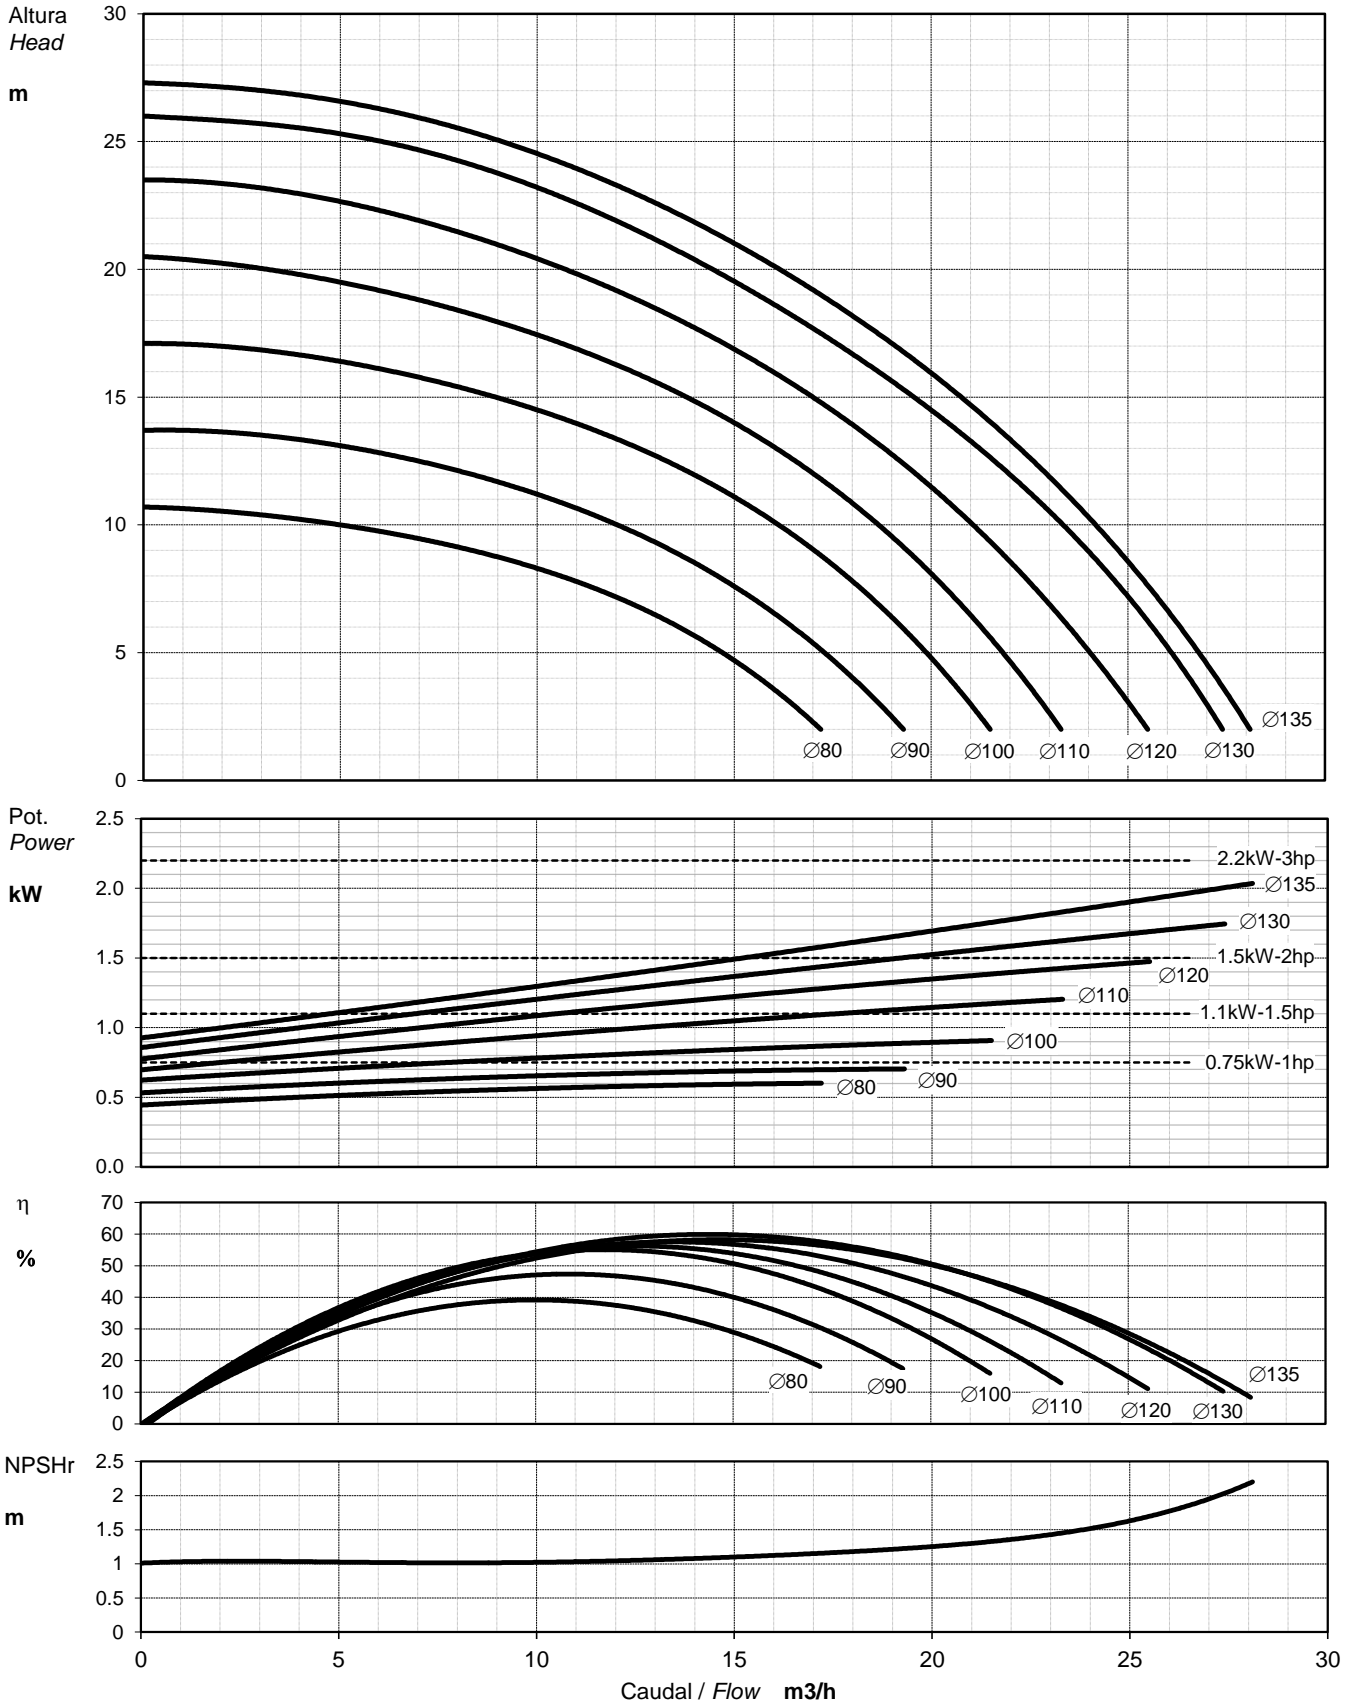



## CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES


Bomba tipo / Pump type	<b>DA-21</b>	Potencia / Power	1.5-2.2 kW	2-3 hp
rpm	<b>2900</b>	Rodete / Impeller Ø (mm)	Semiabierto 6p / Semi-open 6p	max 180 - min 120
Hz	<b>50</b>	Ø asp / Ø inlet	<b>DN-50</b>	
Código / Code	<b>CDS6N-103</b>	Ø imp / Ø outlet	<b>DN-50</b>	

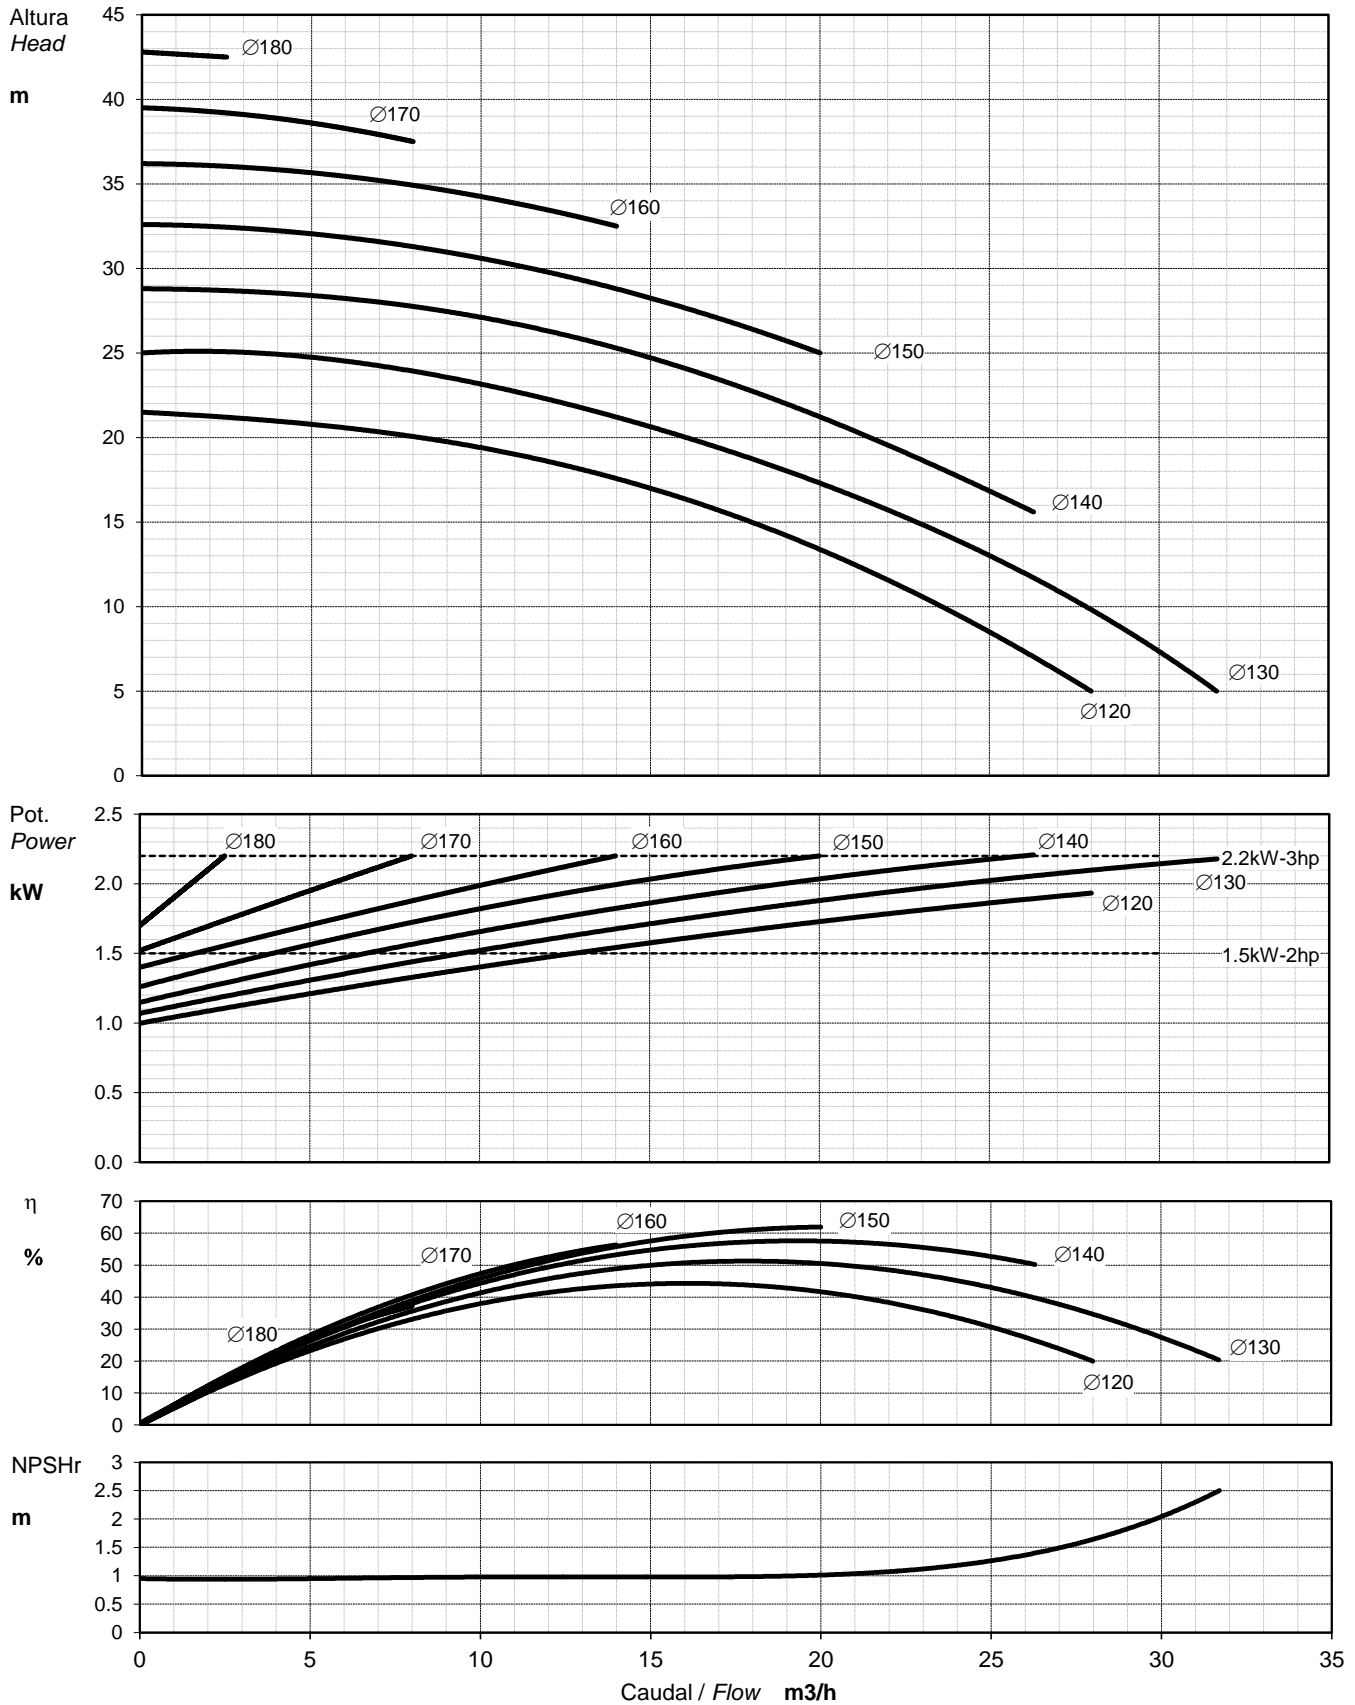



## CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES





Bomba tipo / Pump type	<b>DA-22</b>	Potencia / Power	<b>3-4-5.5 kW</b>	<b>4-5.5-7.5 hp</b>
rpm	<b>2900</b>	Rodete / Impeller Ø (mm)	<b>Semiabierto 6p / Semi-open 6p</b>	<b>max 180 - min 120</b>
Hz	<b>50</b>	Ø asp / Ø inlet	<b>DN-65</b>	
Código / Code	<b>CDS6N-104</b>	Ø imp / Ø outlet	<b>DN-50</b>	

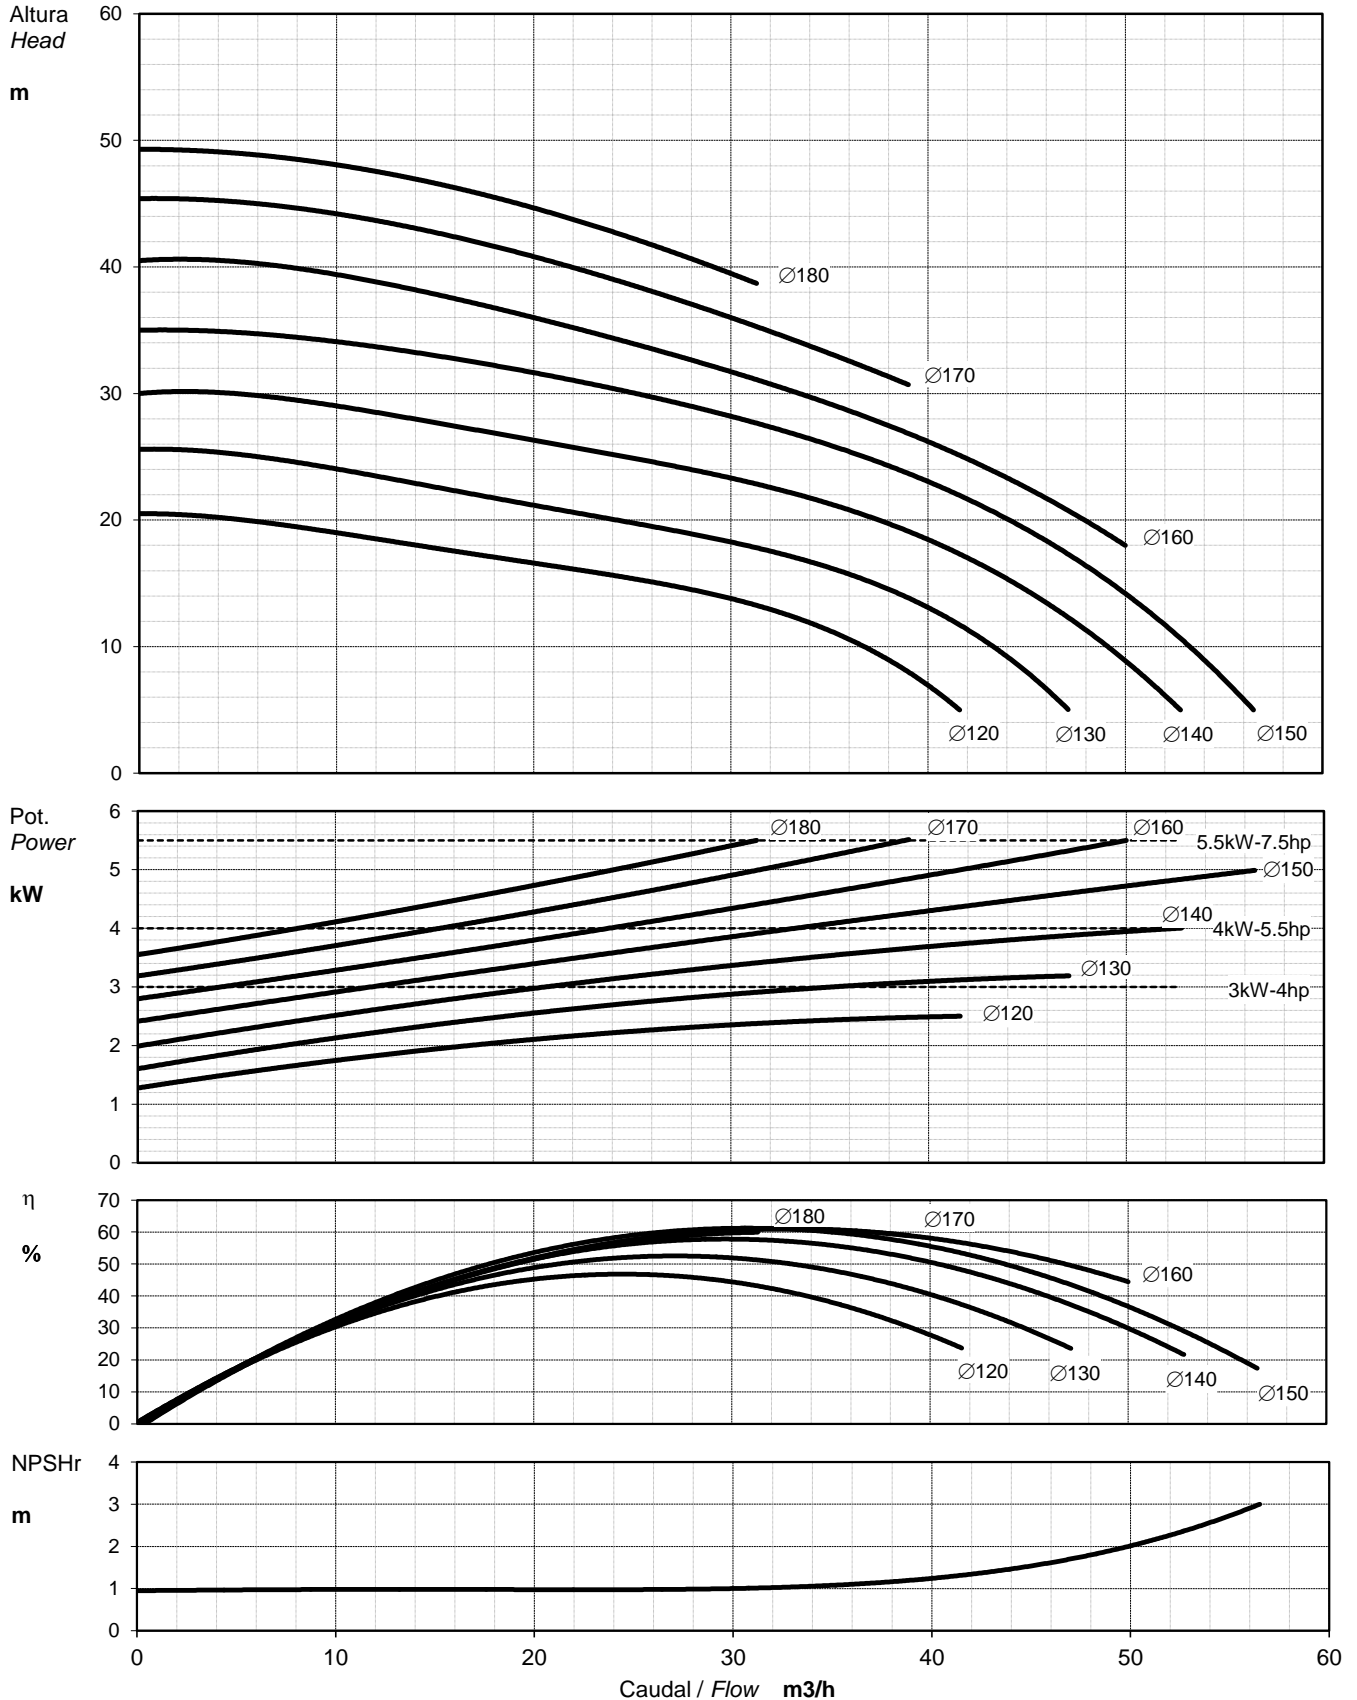



## CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES





Bomba tipo / Pump type	<b>DA-31</b>	Potencia / Power	5.5-7.5 kW
rpm	<b>2900</b>	Rodete / Impeller Ø (mm)	<b>Semiabierto 6p / Semi-open 6p</b>
Hz	<b>50</b>	Ø asp / Ø inlet	<b>DN-65</b>
Código / Code	<b>CDS6N-105</b>	Ø imp / Ø outlet	<b>DN-65</b>

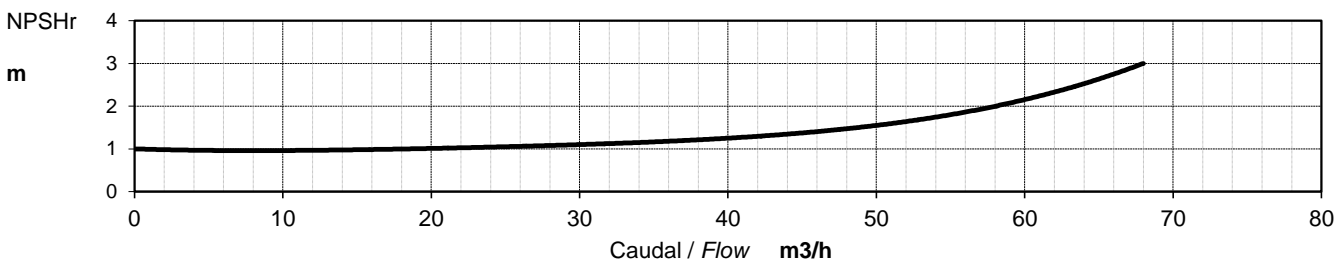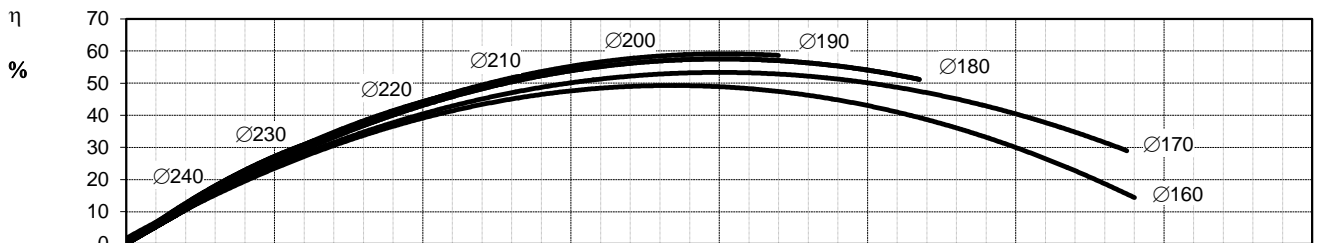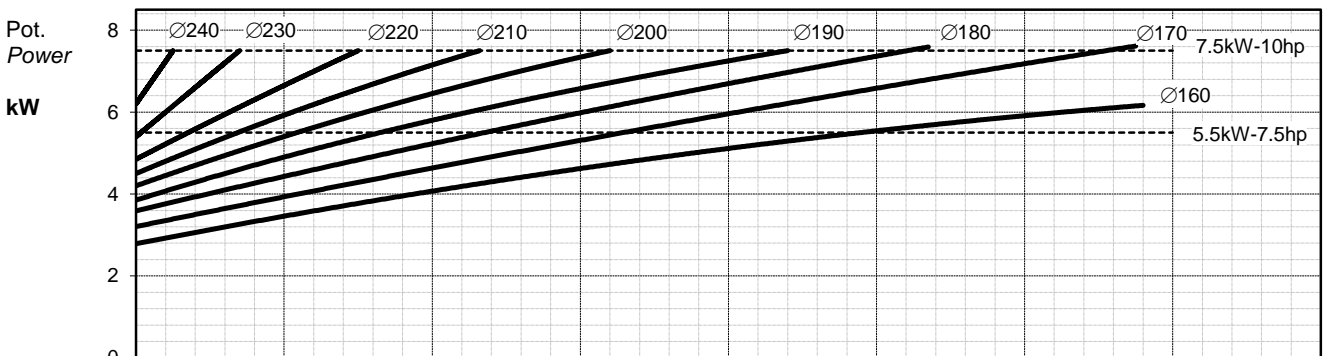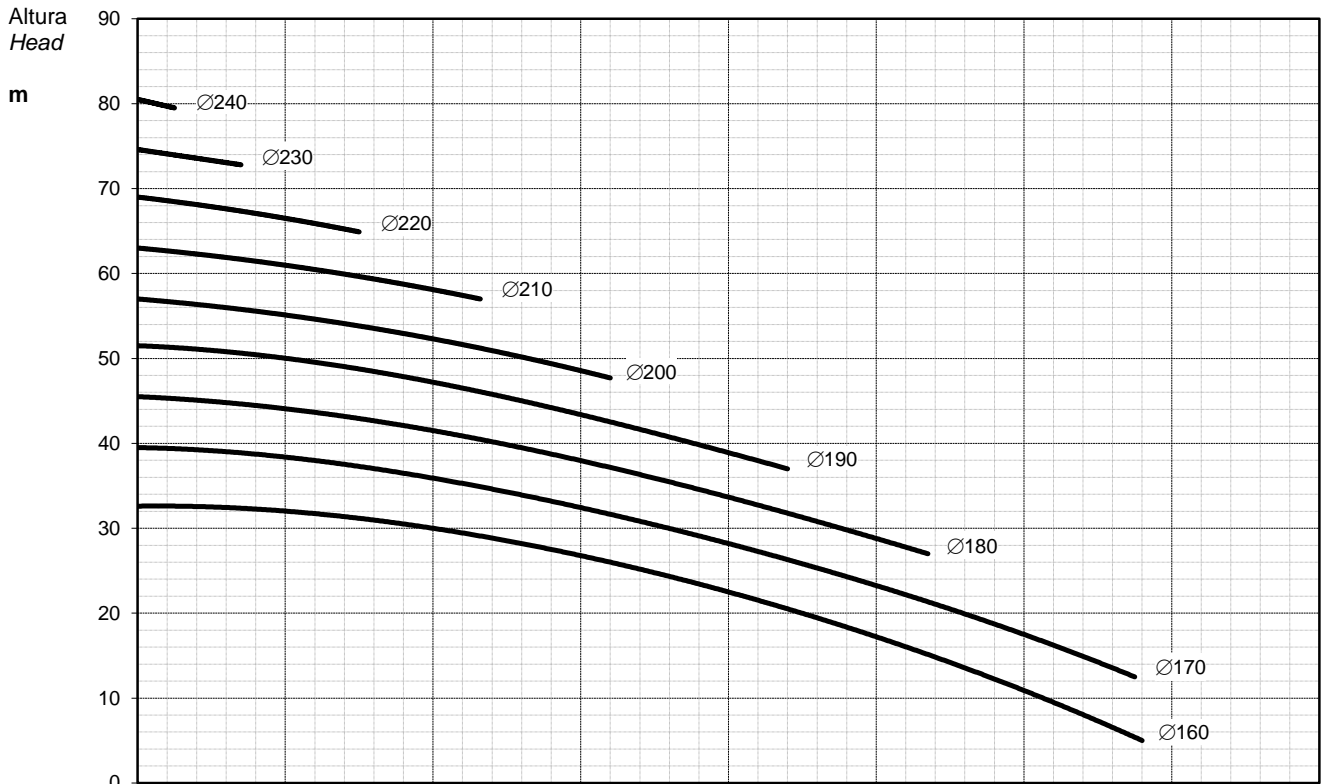



## CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES

Bomba tipo / Pump type	<b>DA-33</b>	Potencia / Power	11-15-18.5-22 kW	15-20-25-30 hp
rpm	<b>2900</b>	Rodete / Impeller Ø (mm)	<b>Semiabierto 6p / Semi-open 6p</b>	max 255 - min 160
Hz	<b>50</b>	Ø asp / Ø inlet	<b>DN-80</b>	
Código / Code	<b>CDS6N-106</b>	Ø imp / Ø outlet	<b>DN-65</b>	

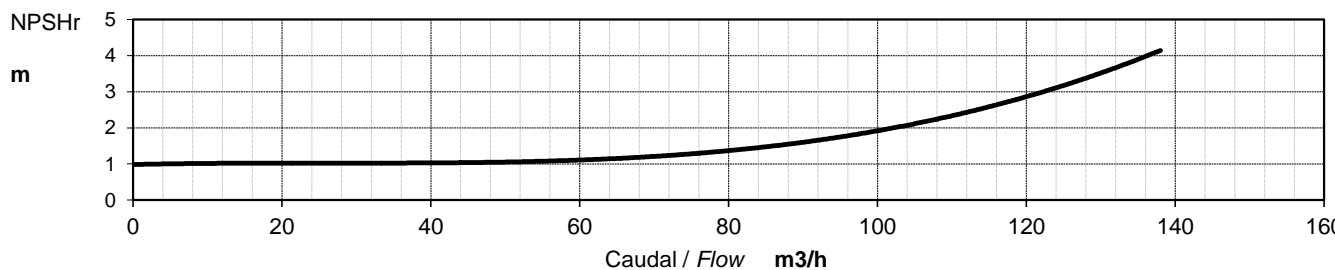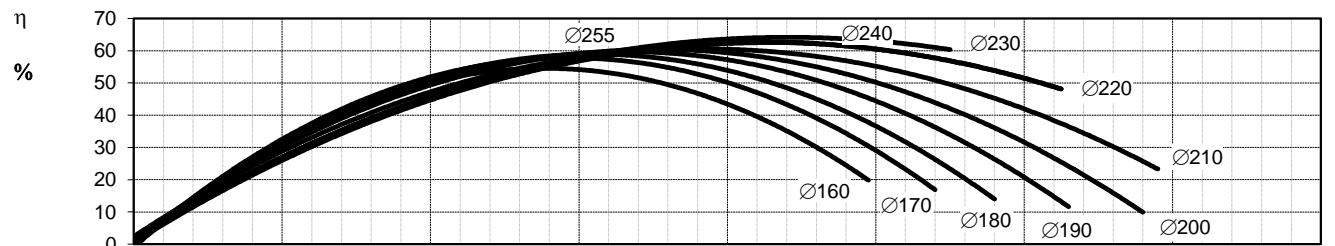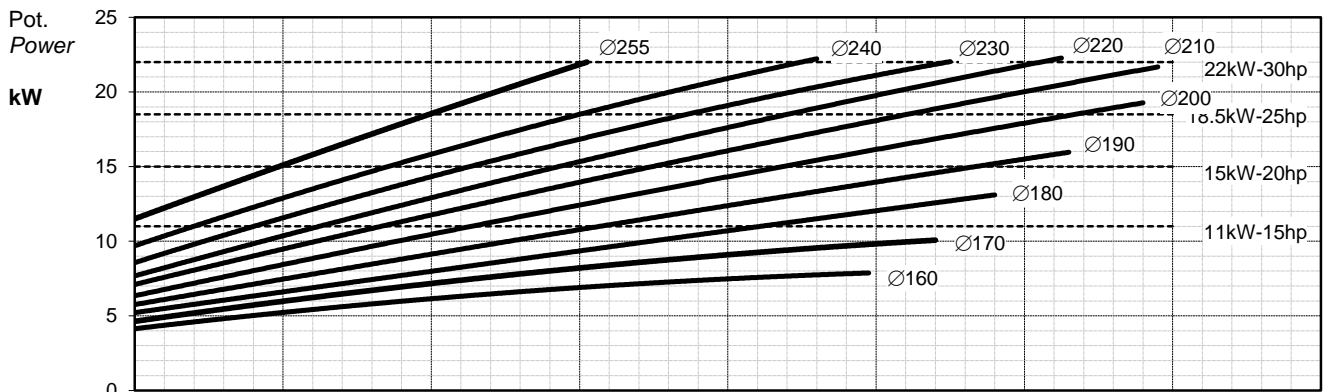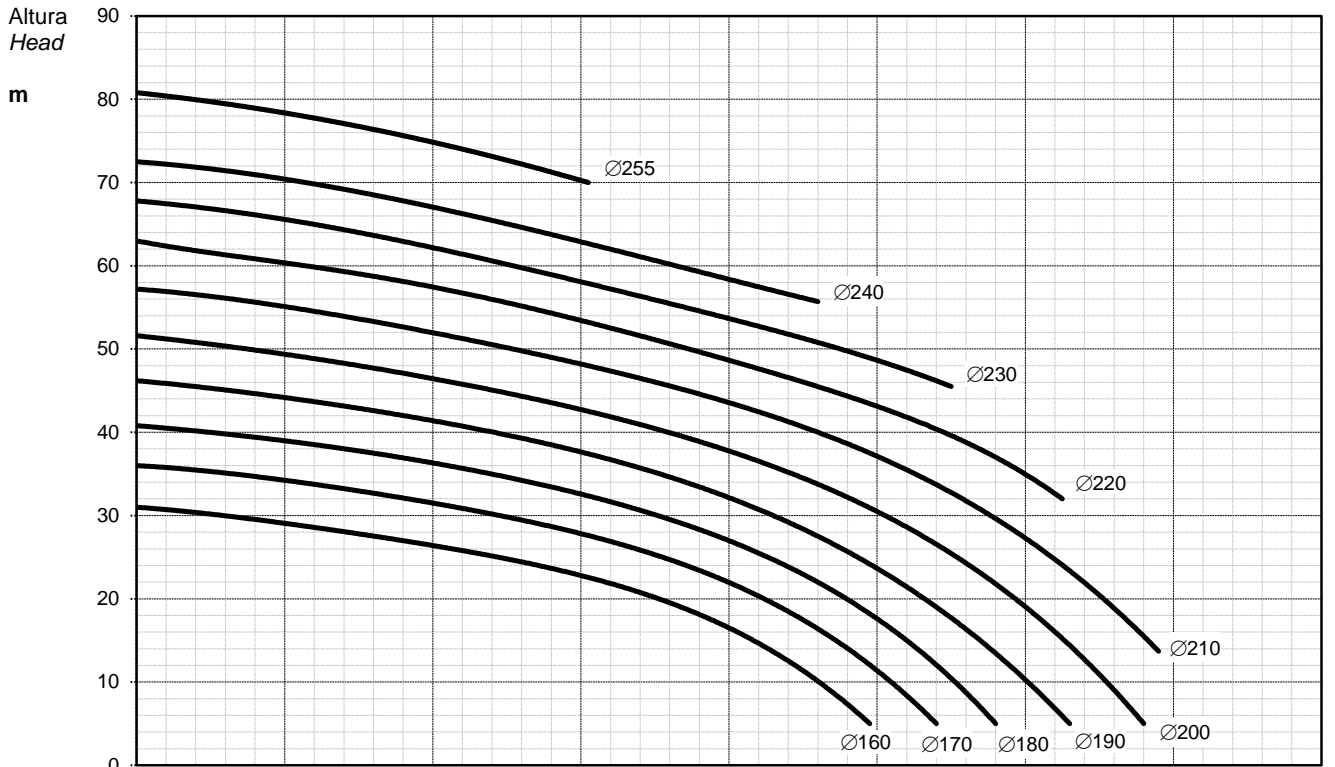



## CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES

Bomba tipo / <i>Pump type</i>	<b>DA-34</b>	Potencia / Power	2.2-3-4-5.5-7.5 kW	3-4-5.5-7.5-10 hp
rpm	<b>1450</b>	Rodete / Impeller Ø (mm)	<b>Semiabierto 6p / Semi-open 6p</b>	max 255 - min 180
Hz	<b>50</b>	Ø asp / Ø inlet	<b>DN-80</b>	
Código / Code	<b>CBO6N-107</b>	Ø imp / Ø outlet	<b>DN-65</b>	

