

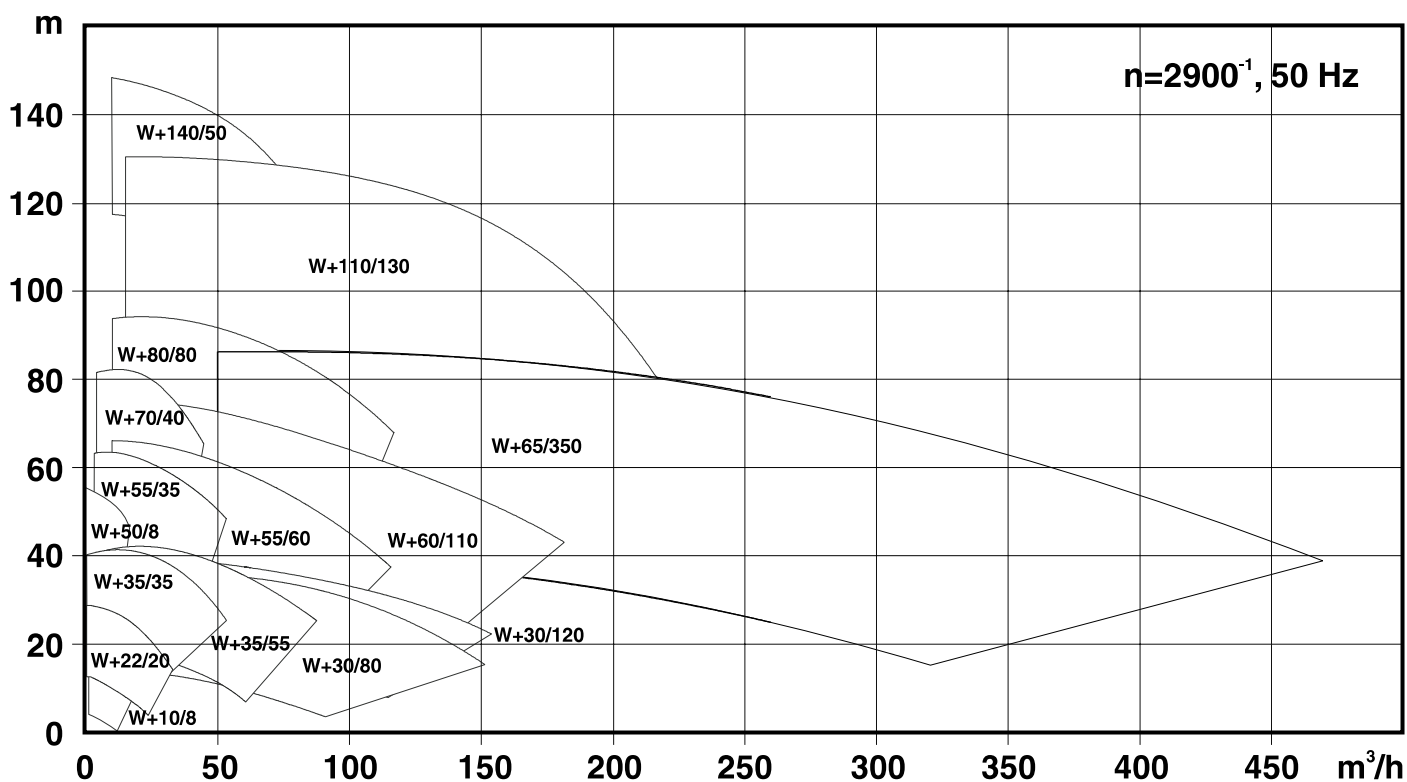
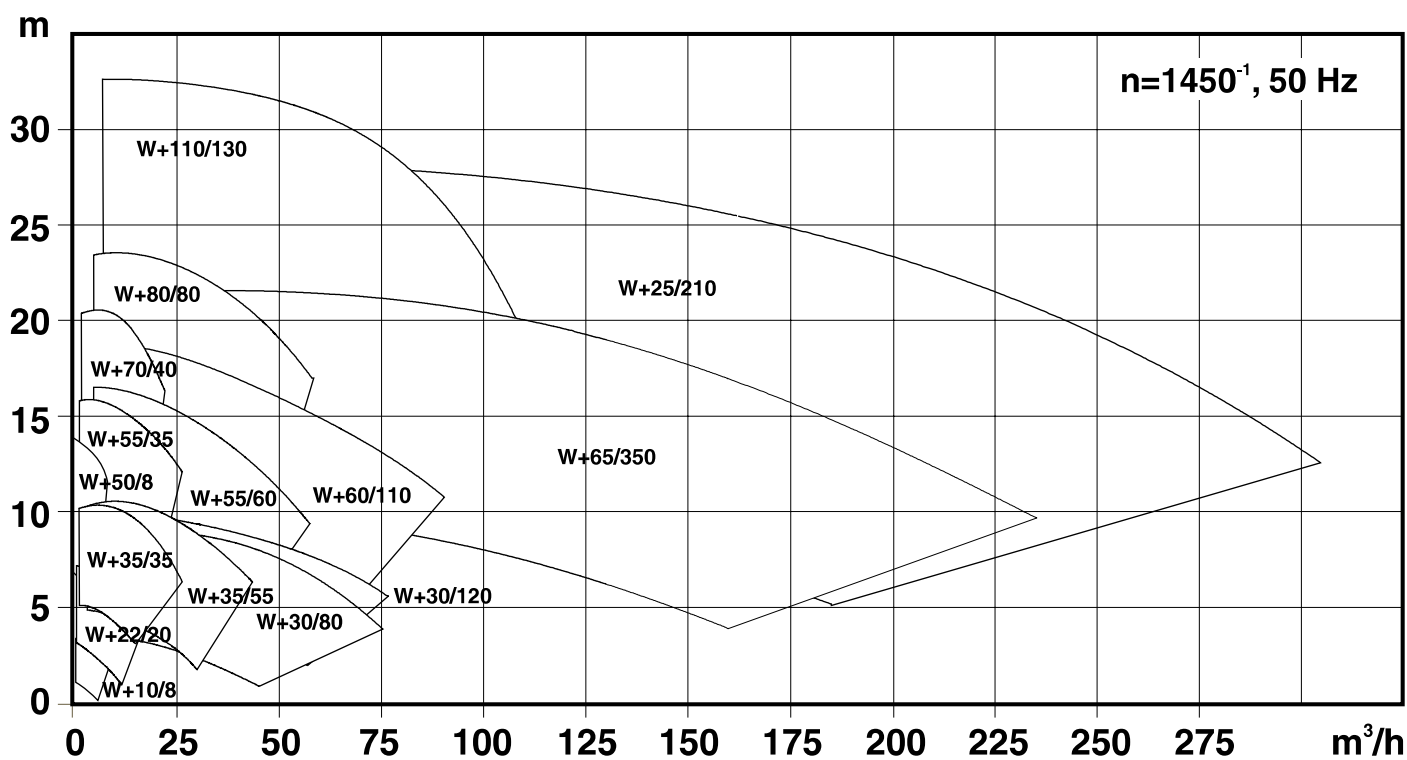




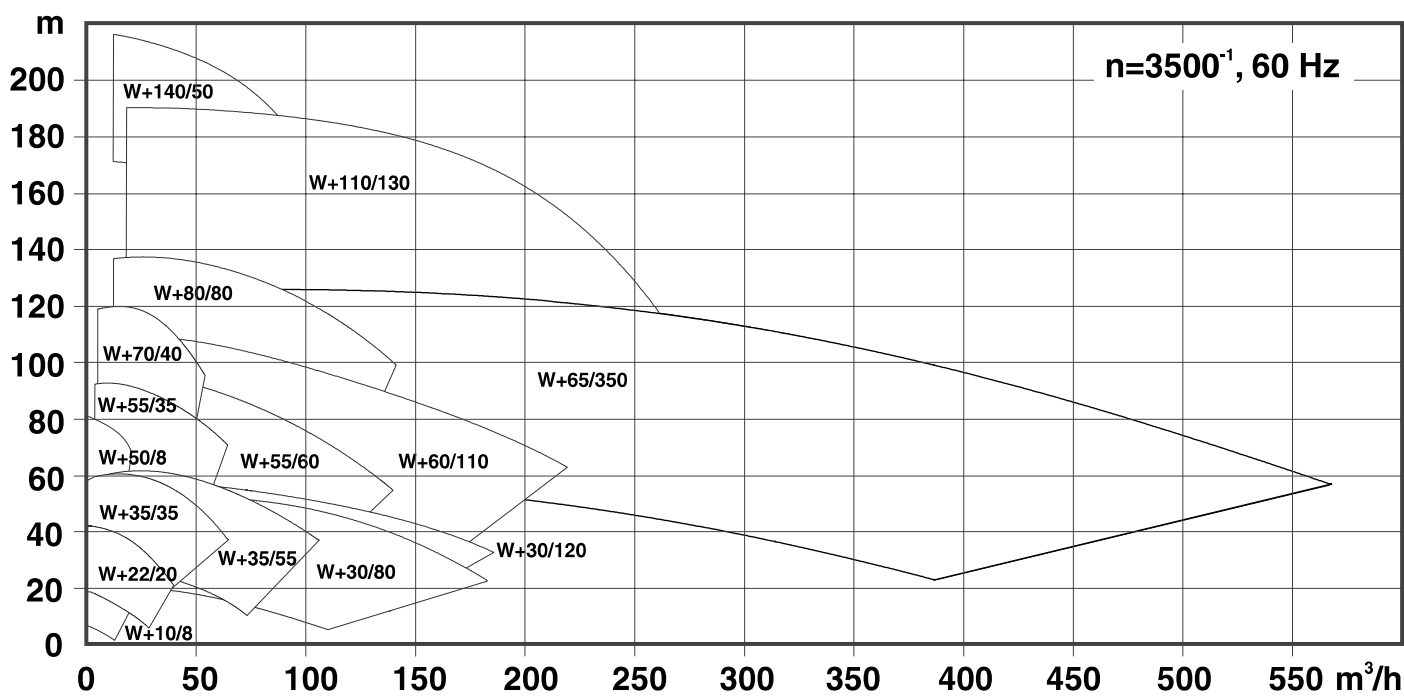


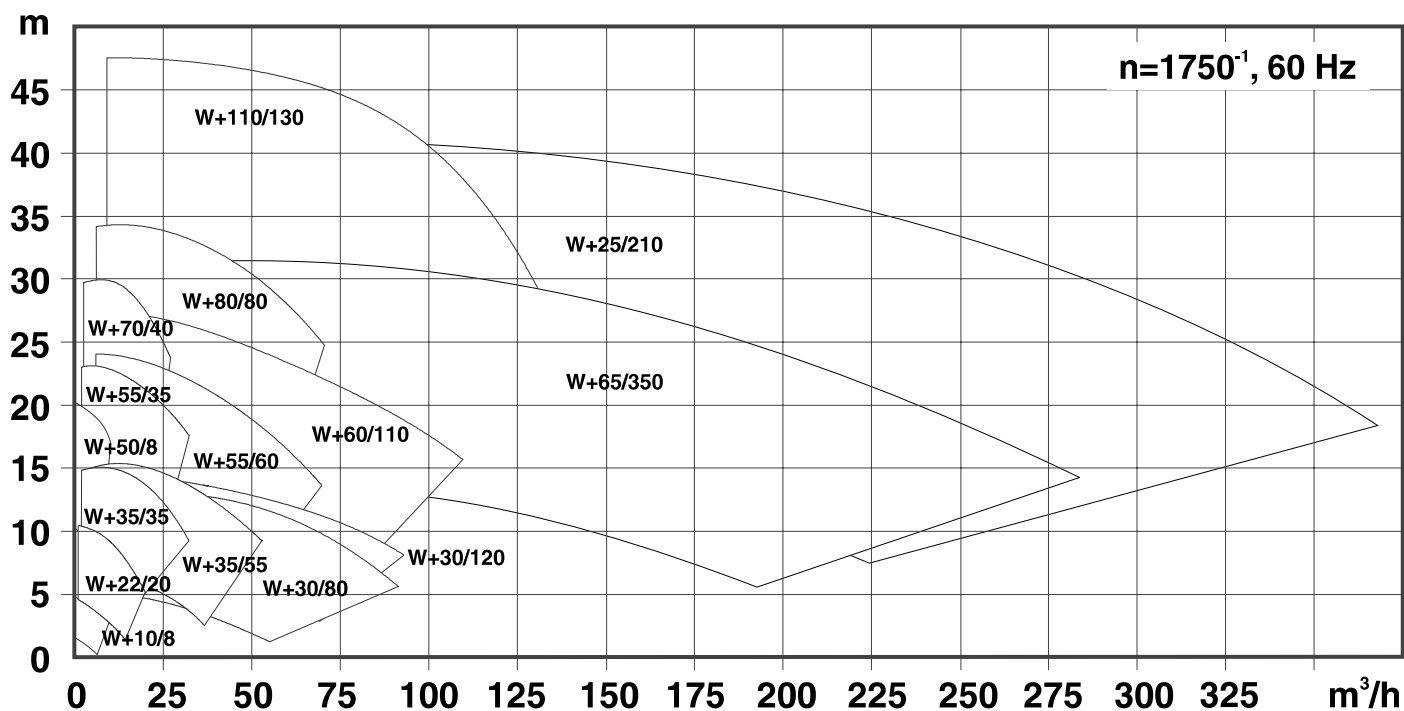

NOTE: _____

Speed: **n=2900⁻¹ 50 Hz**
 Impeller: **Max. dia 110 mm**
 Min. dia 90 mm
 Pump inlet: **38 mm**
 Pump outlet: **25 mm**




Performance data refer to water at 20°C
 Permissible tolerance ±5%

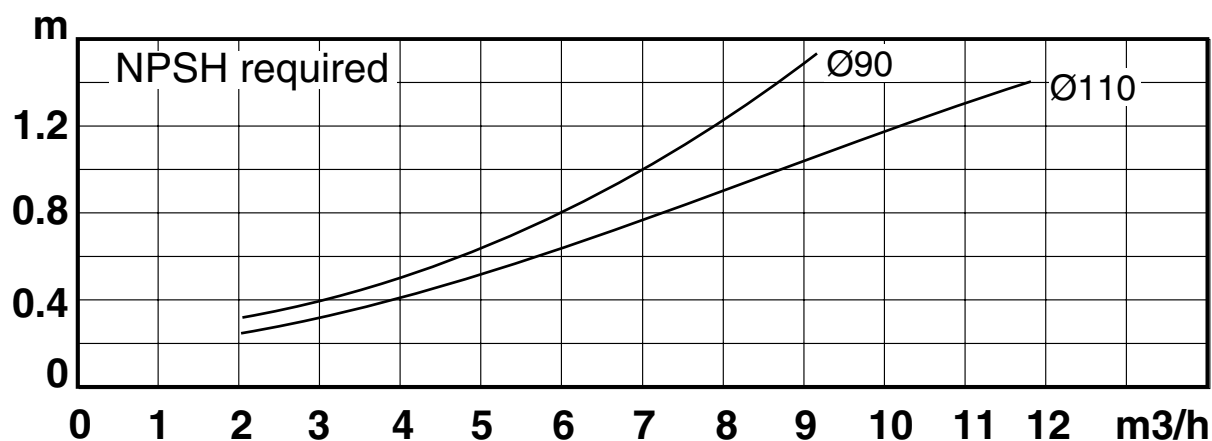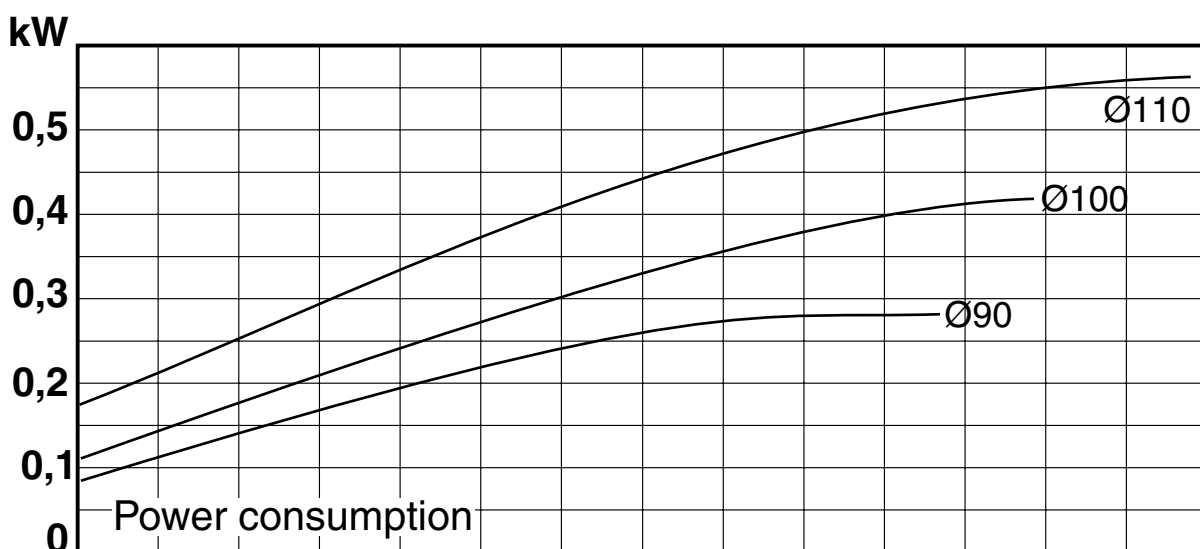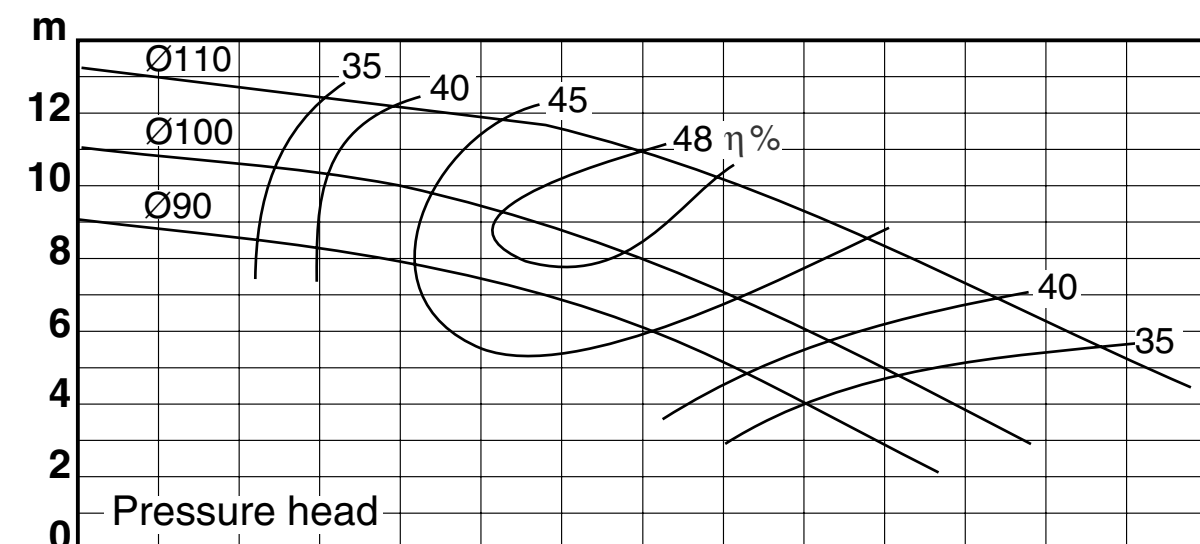

NOTE: _____

Speed: $n=3500 \text{ }^{-1}$ 60 Hz
 Impeller: Max. dia 110 mm
 Min. dia 90 mm
 Pump inlet: 38 mm
 Pump outlet: 25 mm

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

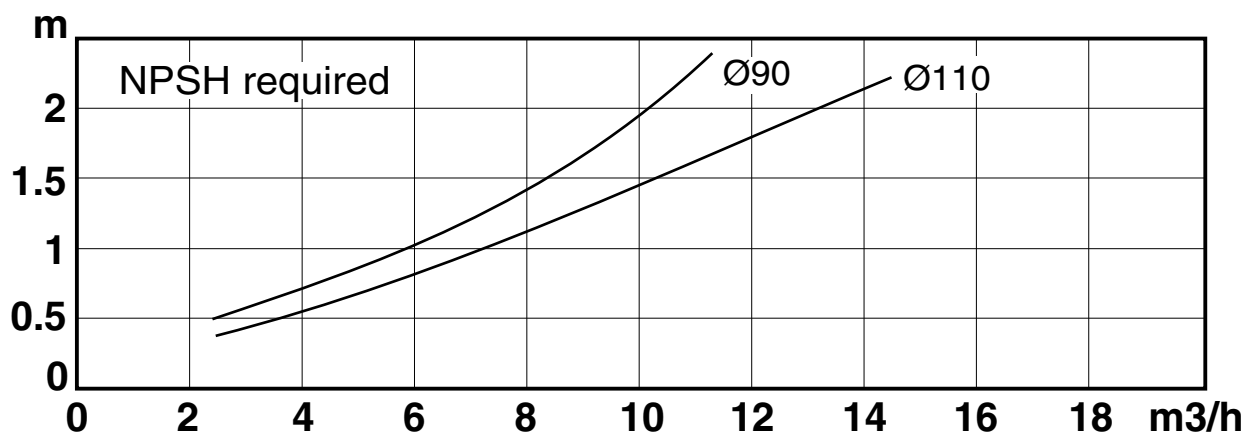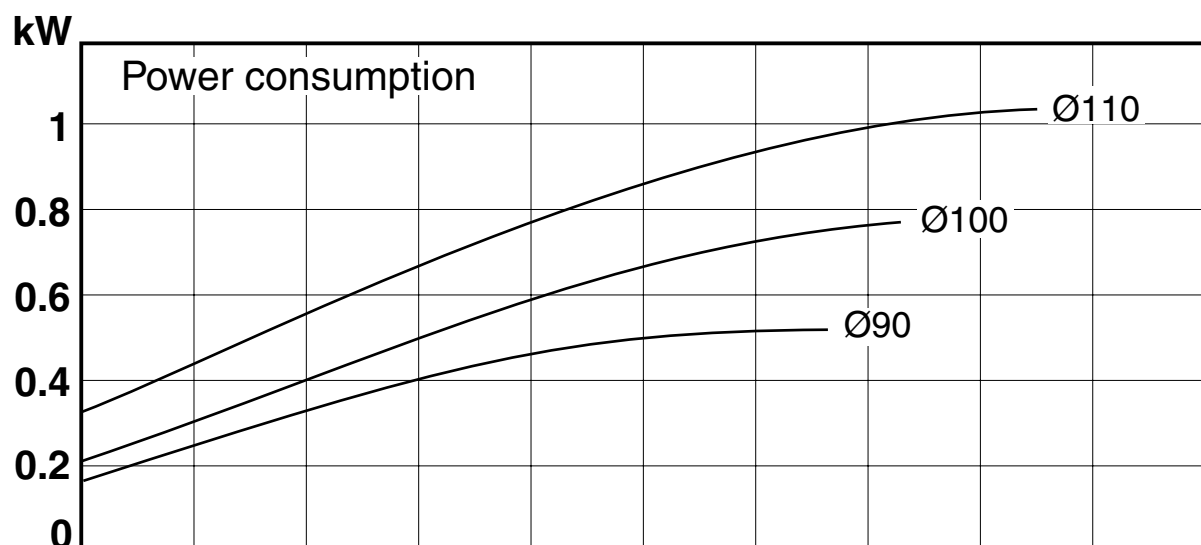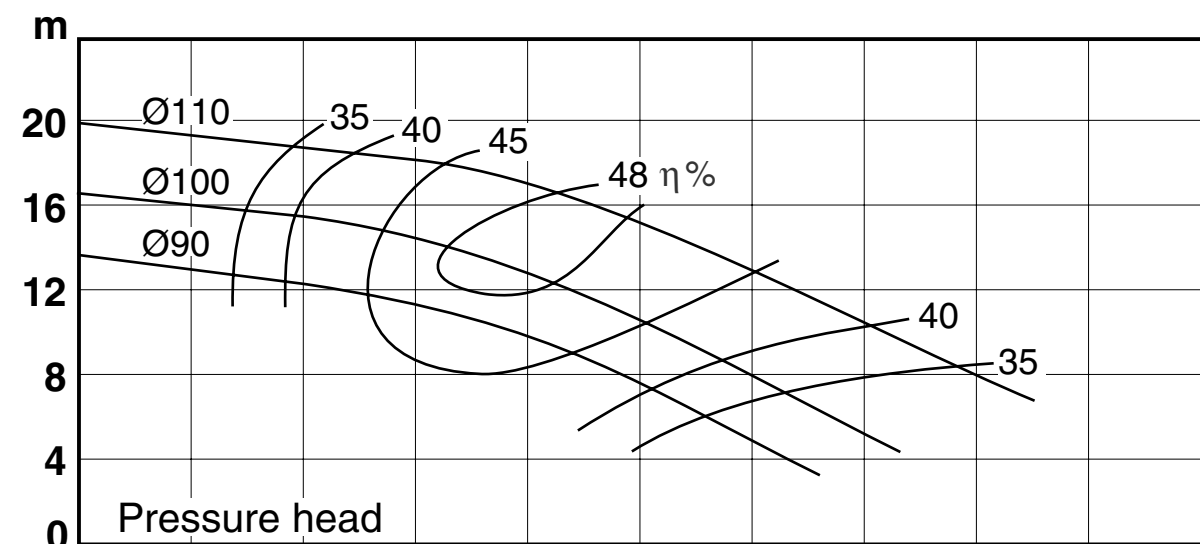

NOTE: _____

Low flow impeller

Speed: **n=1450⁻¹ 50 Hz**

Impeller: **Max. dia 142 mm**

Min. dia 105 mm


Pump inlet: **51 mm**

Pump outlet: **51 mm**


Performance data refer to water at 20°C

Permissible tolerance ±5%

m

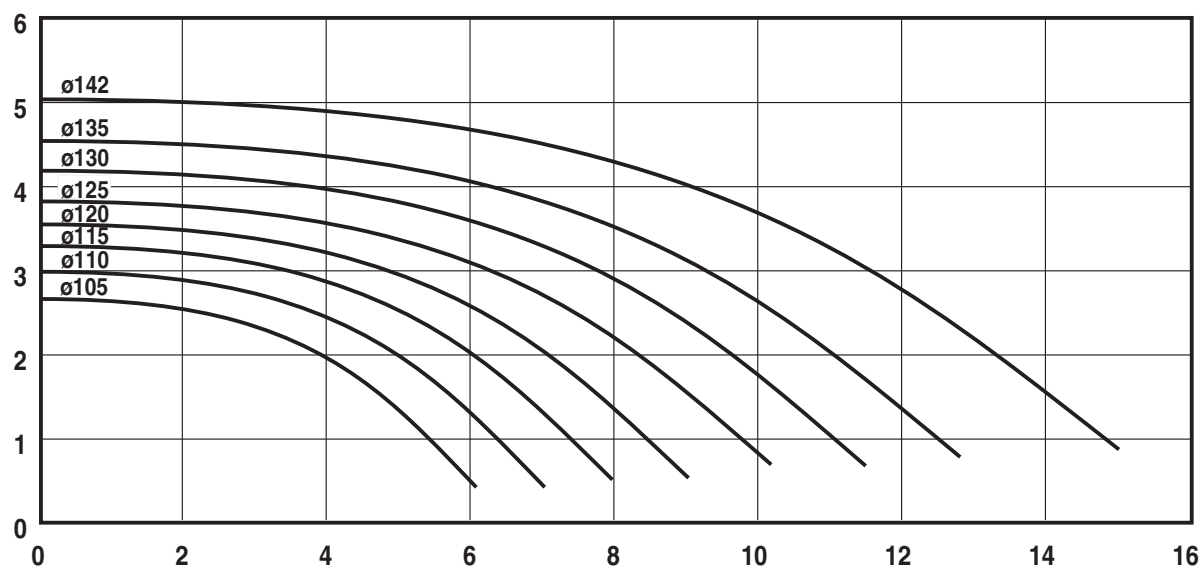

kW

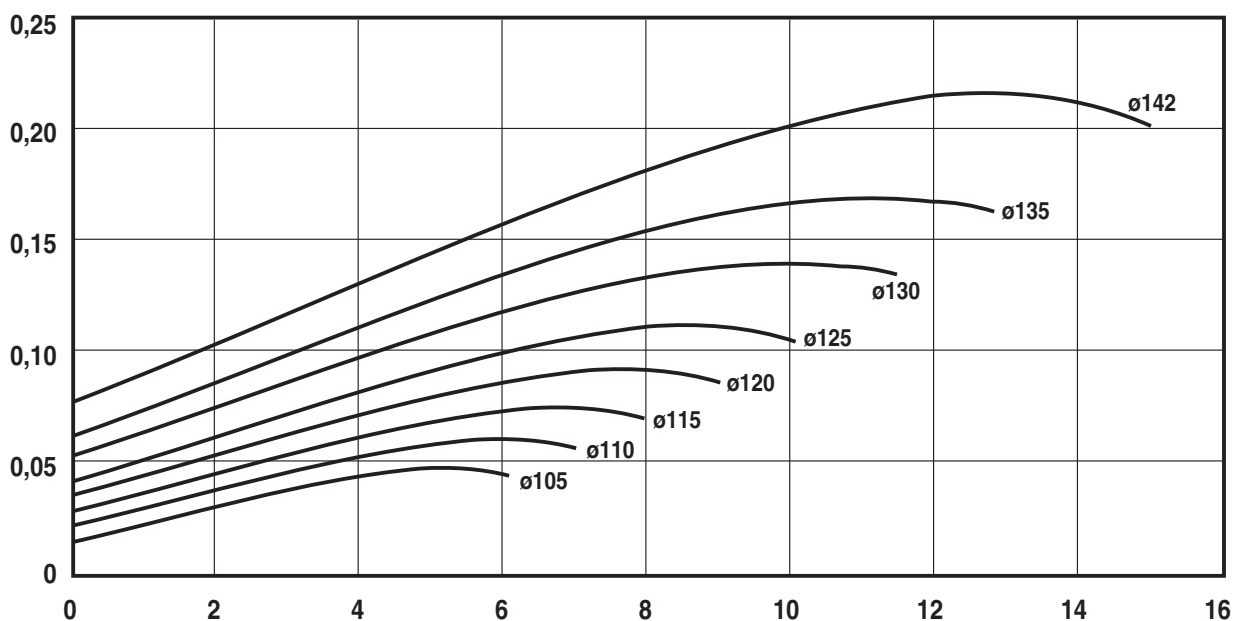

Flow m³/h

NOTE: _____

Low flow impeller

Speed: **n=2900⁻¹ 50 Hz**

Impeller: **Max. dia 142 mm**

Min. dia 105 mm


Pump inlet: **51 mm**

Pump outlet: **51 mm**


Performance data refer to water at 20°C

Permissible tolerance ±5%

m

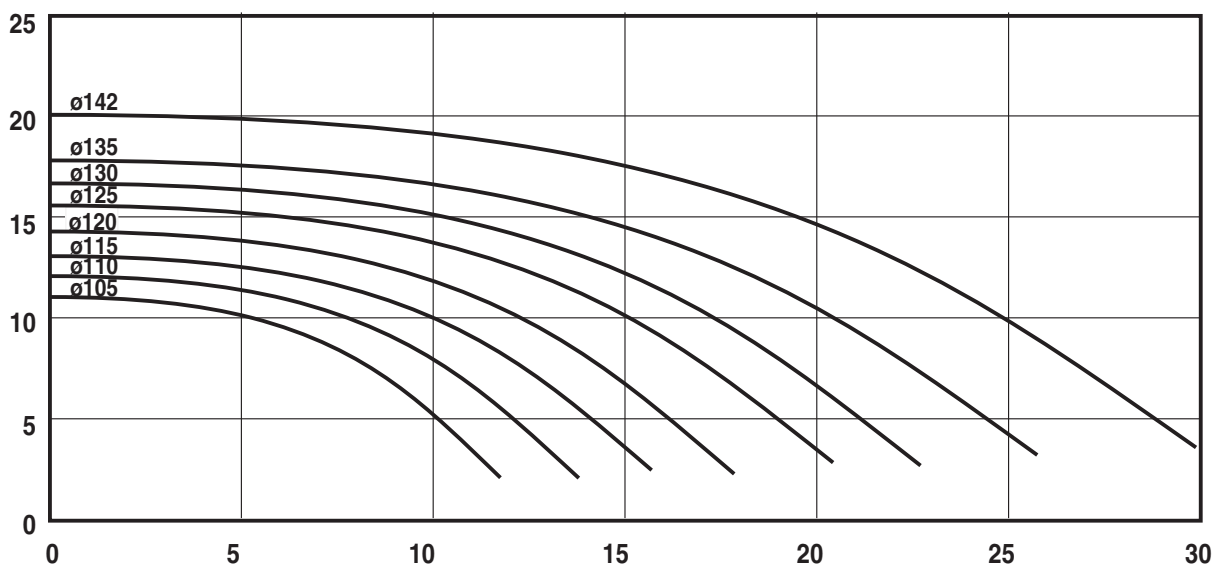

kW

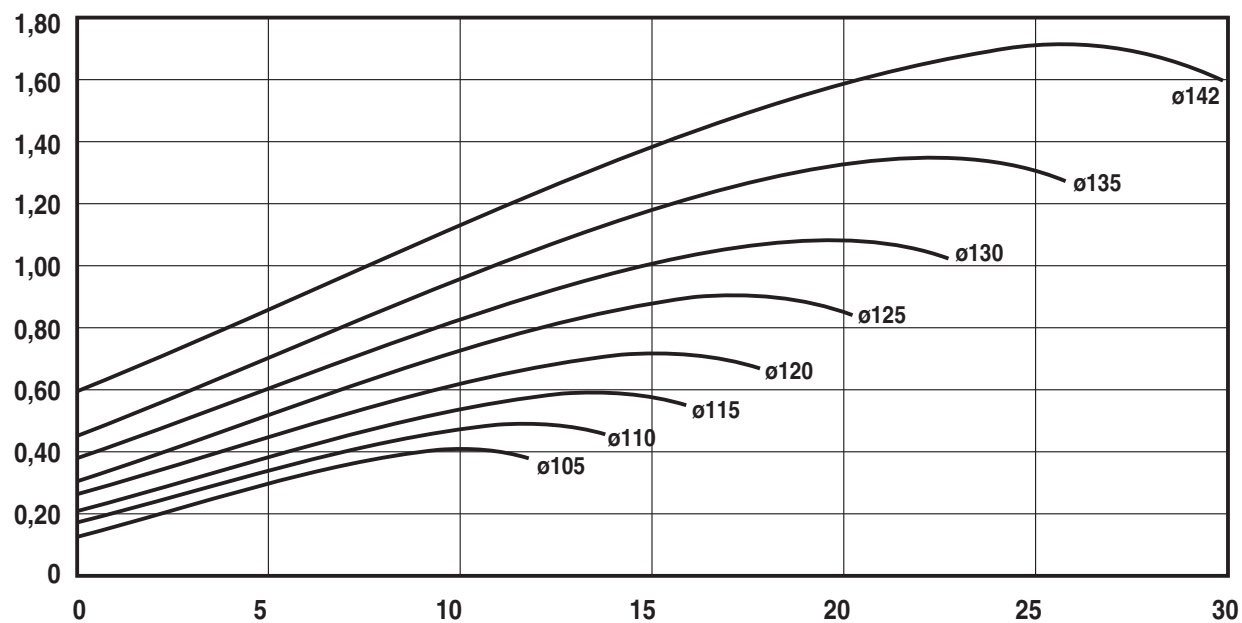

Flow m³/h

NOTE: _____

Low flow impeller

Speed: **n=1750⁻¹ 60 Hz**

Impeller: **Max. dia 142 mm**

Min. dia 105 mm


Pump inlet: **51 mm**

Pump outlet: **51 mm**


Performance data refer to water at 20°C

Permissible tolerance ±5%

m

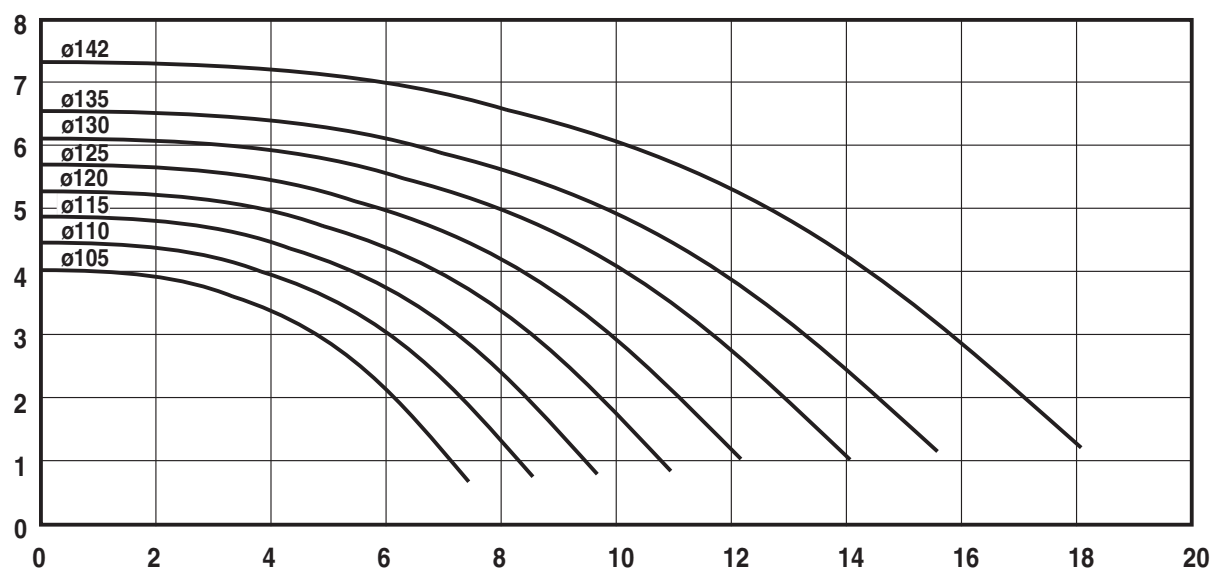

kW


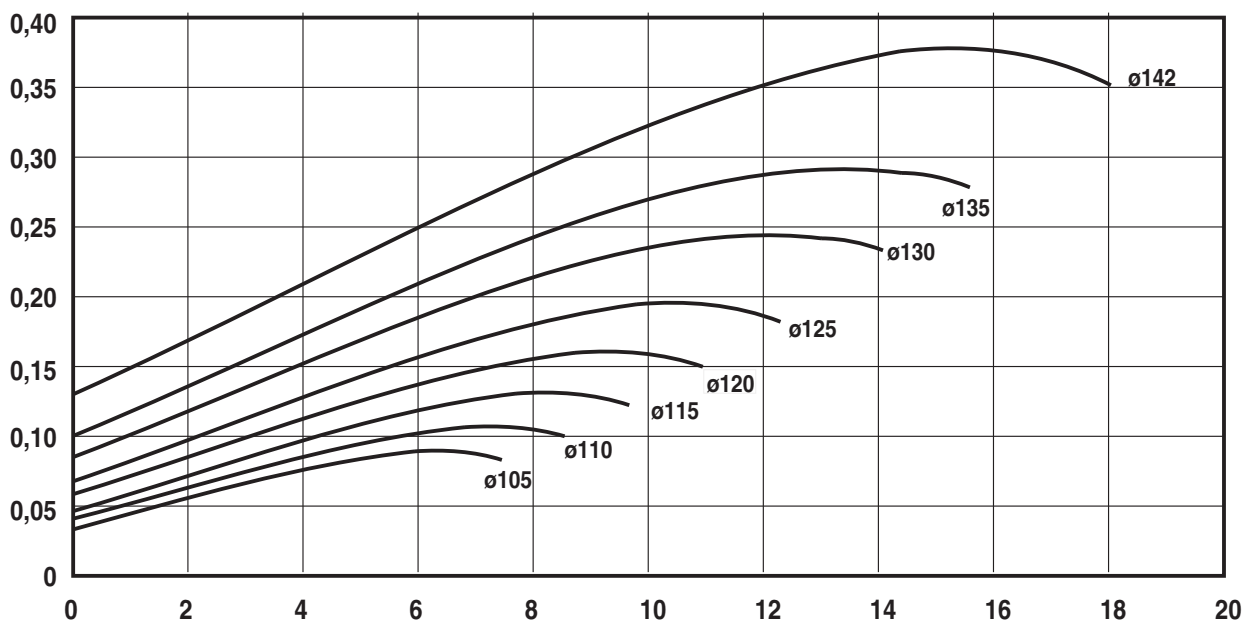


Flow m³/h

NOTE: _____

Low flow impeller
Speed: **n=3500⁻¹ 60 Hz**
Impeller: **Max. dia 142 mm**
Min. dia 105 mm
Pump inlet: **51 mm**
Pump outlet: **51 mm**

Performance data refer to water at 20°C
Permissible tolerance ±5%


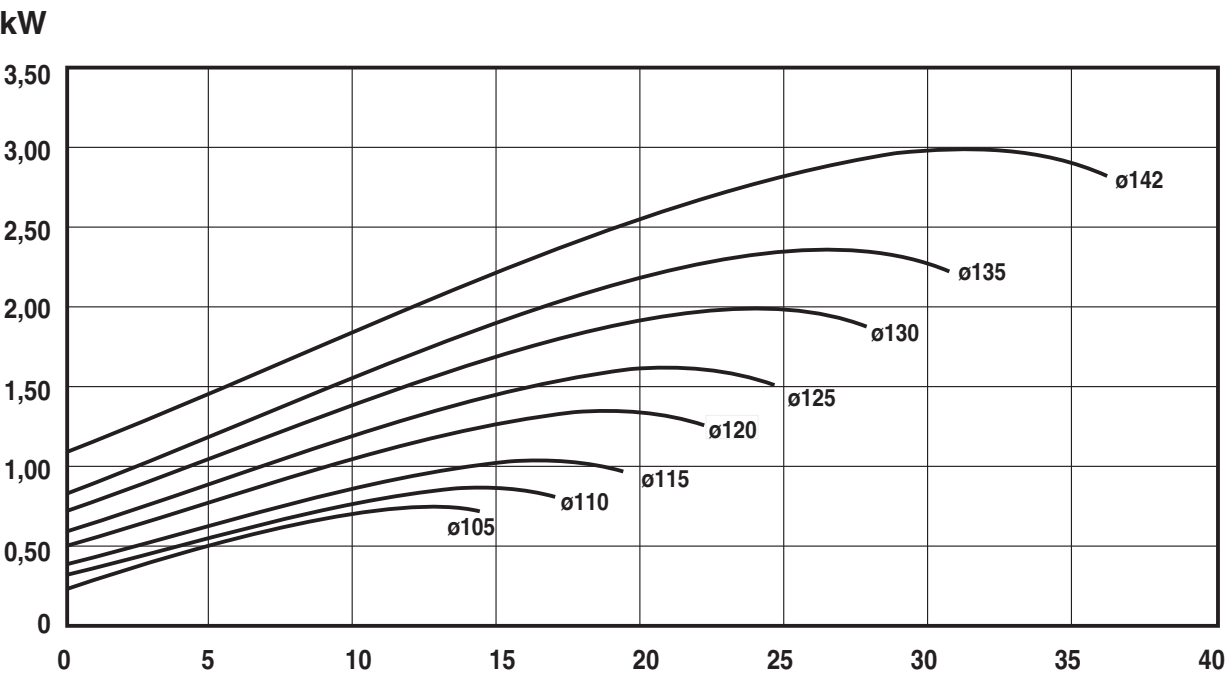
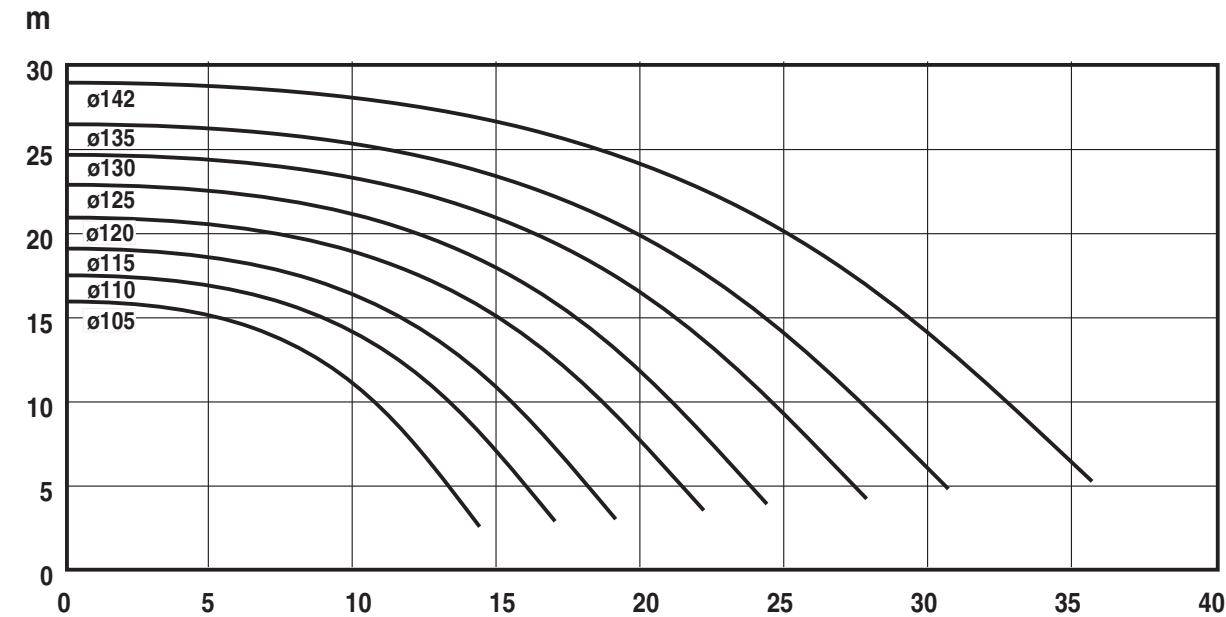


Flow m³/h

NOTE: _____

Speed: **n=1450⁻¹ 50 Hz**
Impeller: **Max. dia 142 mm**
Min. dia 100 mm
Pump inlet: **51 mm**
Pump outlet: **51 mm**

Performance data refer to water at 20°C
Permissible tolerance ±5%

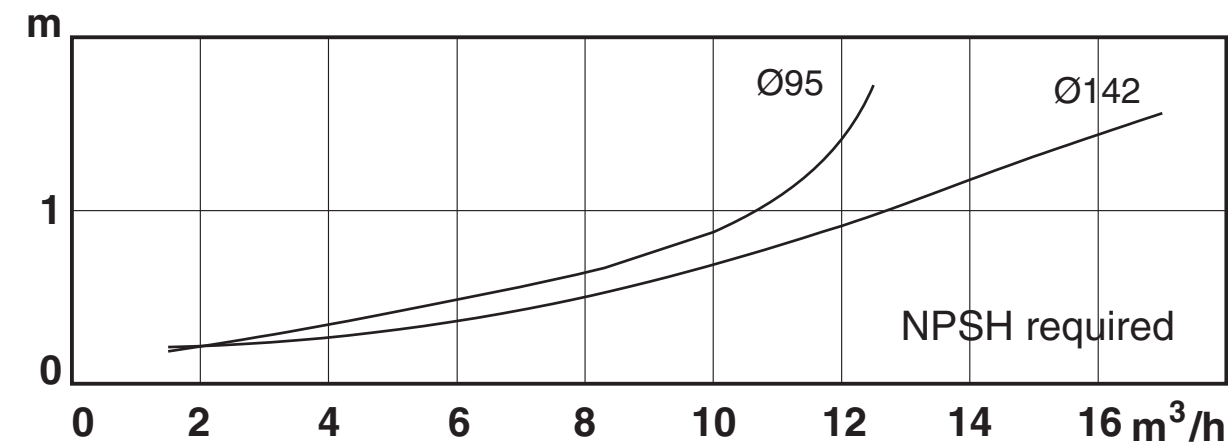
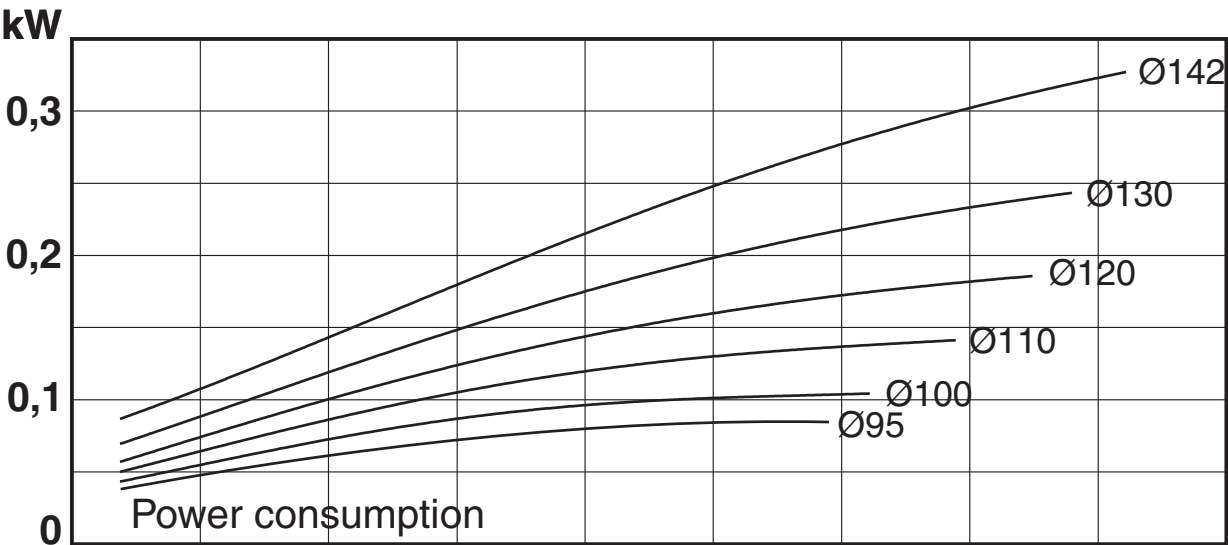
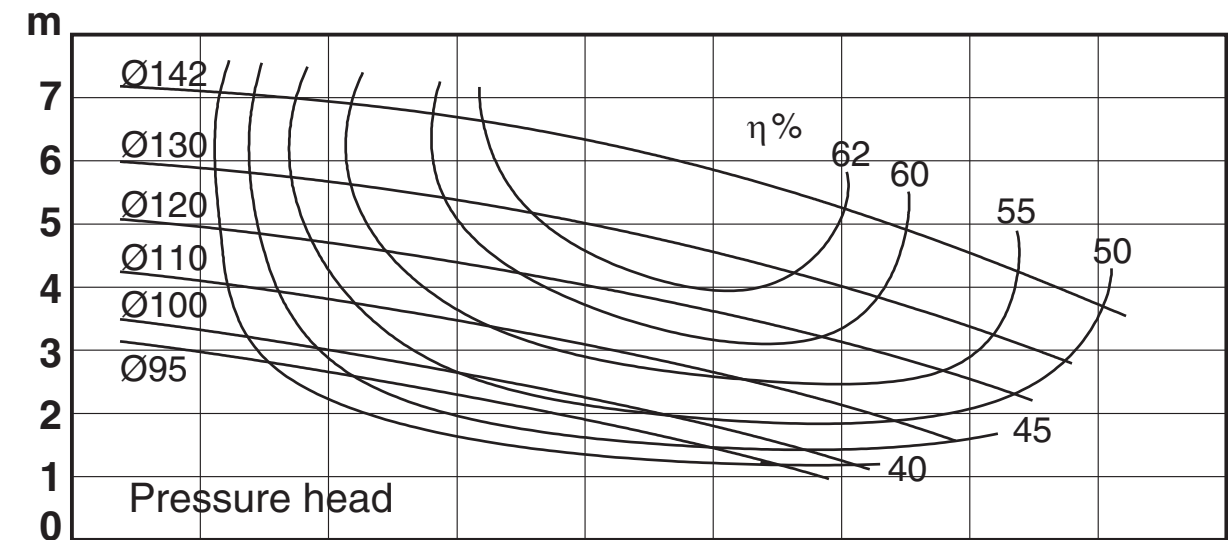


453243 ISS T 10.08

NOTE: _____

Speed: **n=2900⁻¹ 50 Hz**
Impeller: **Max. dia 142 mm**
Min. dia 100 mm
Pump inlet: **51 mm**
Pump outlet: **51 mm**

Performance data refer to water at 20°C
Permissible tolerance ±5%

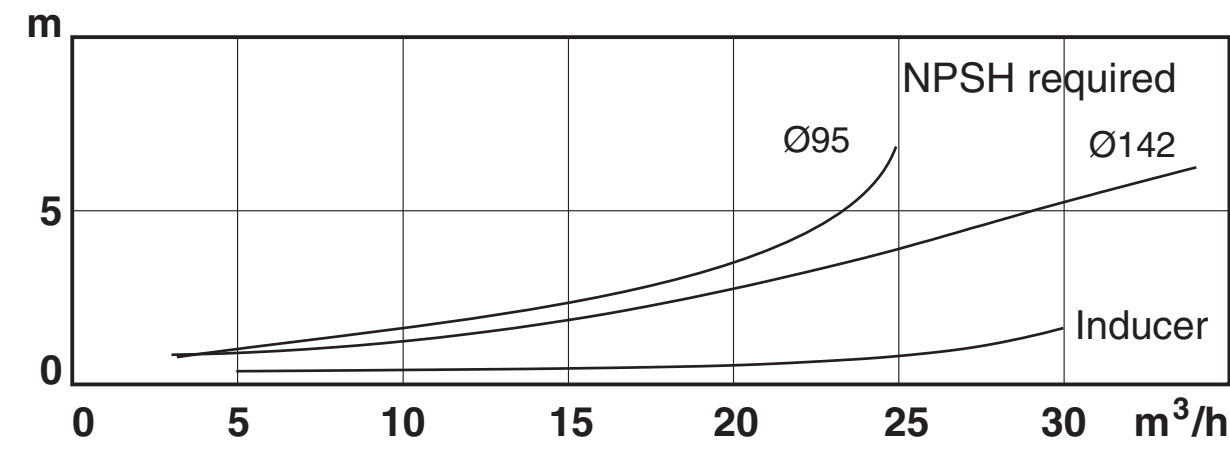
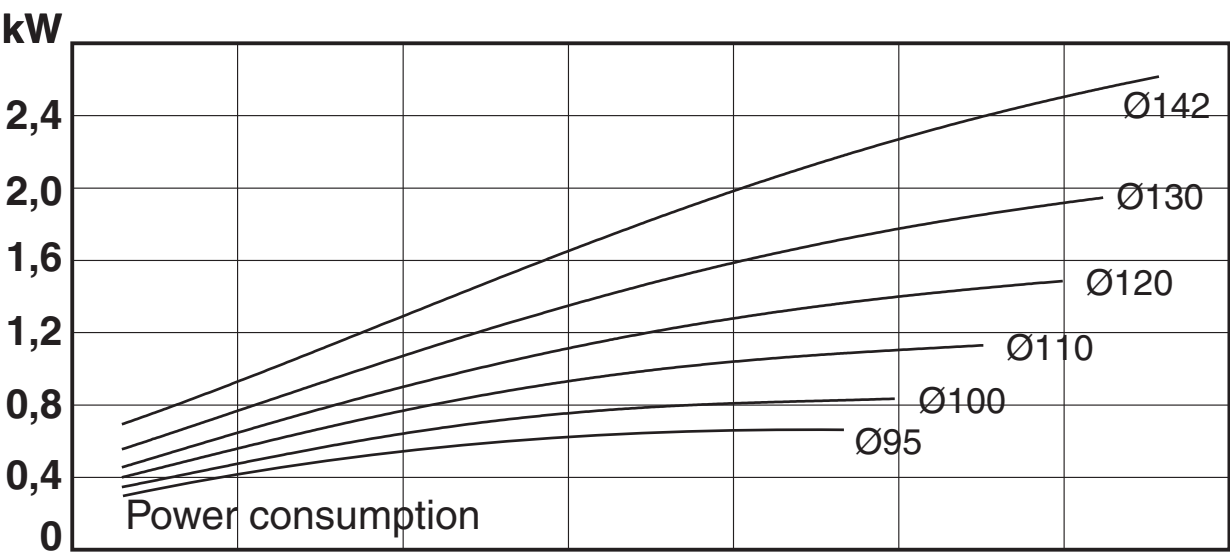
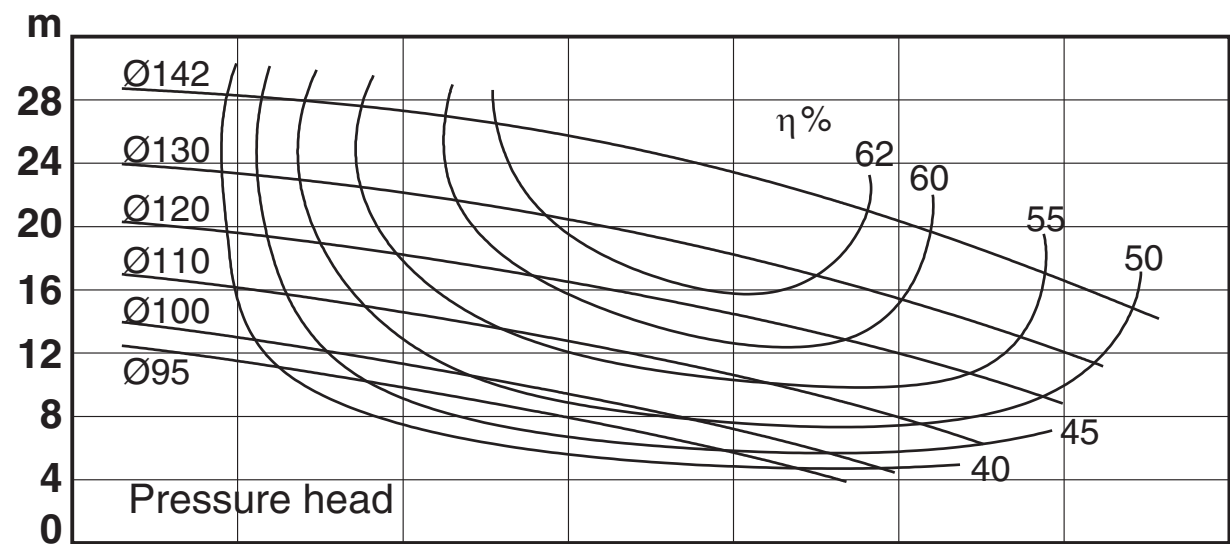


453243 ISS T 10.08

NOTE: _____

Speed: $n=1750^{-1}$ 60 Hz
 Impeller: Max. dia 142 mm
 Min. dia 100 mm
 Pump inlet: 51 mm
 Pump outlet: 51 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

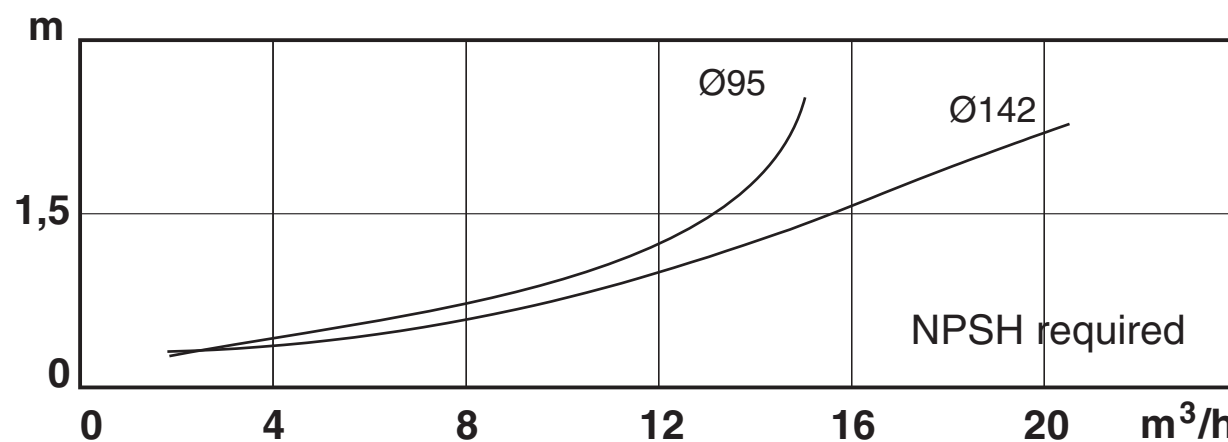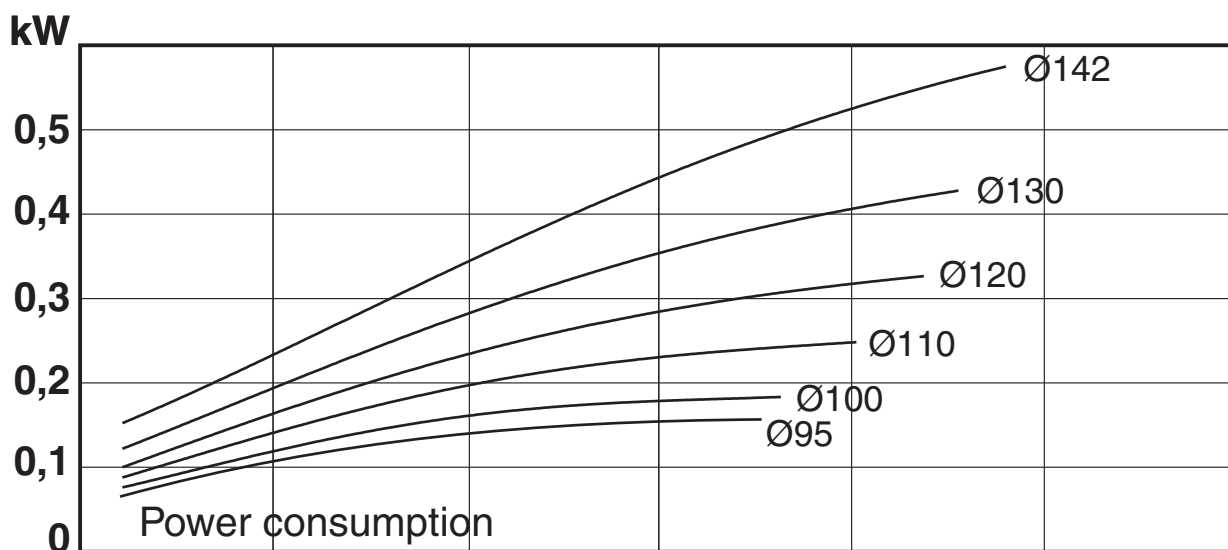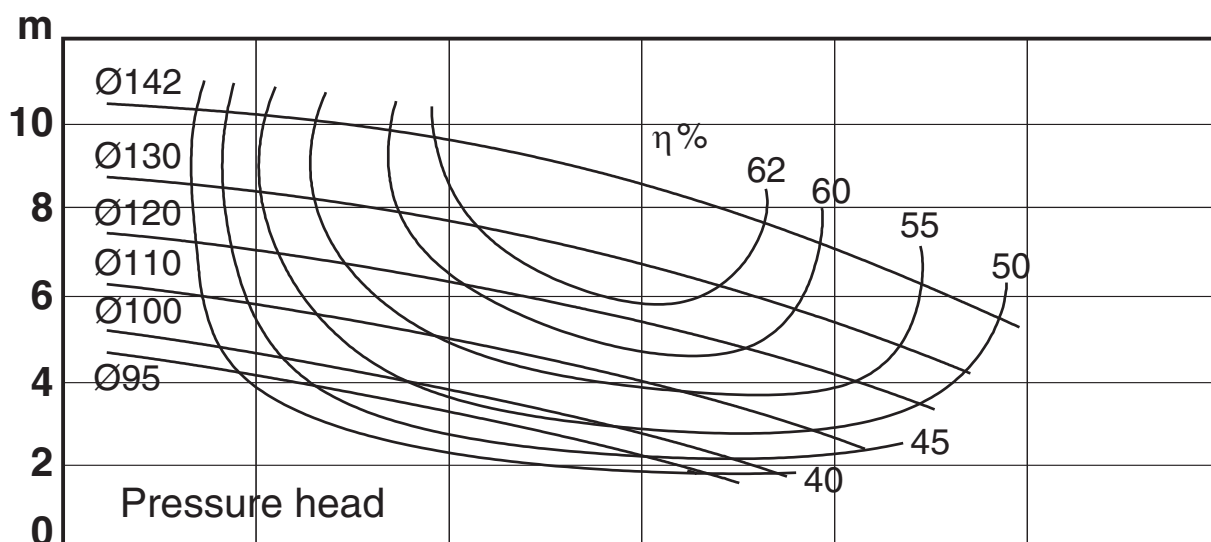

NOTE: _____

Speed: **n=3500⁻¹ 60 Hz**
Impeller: **Max. dia 142 mm**
Min. dia 100 mm
Pump inlet: **51 mm**
Pump outlet: **51 mm**




Performance data refer to water at 20°C
Permissible tolerance ±5%

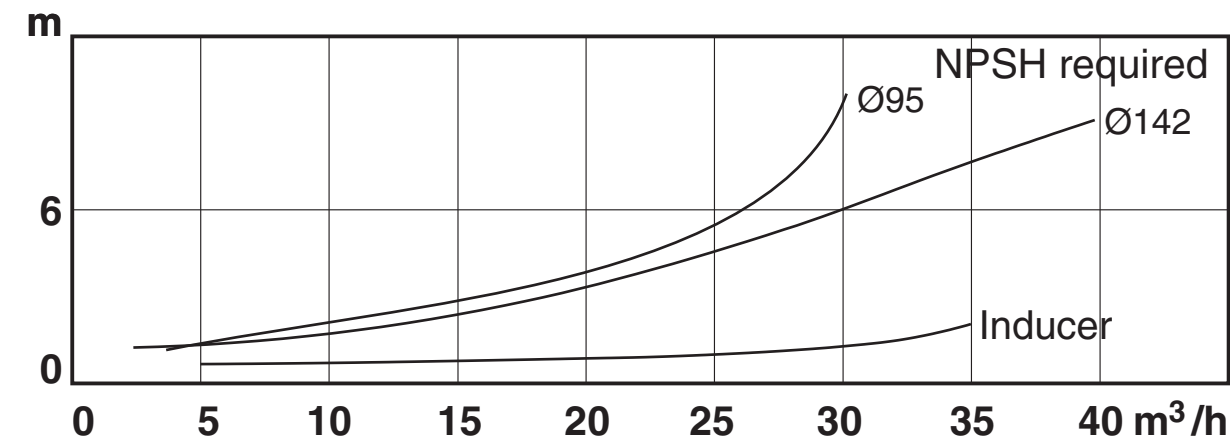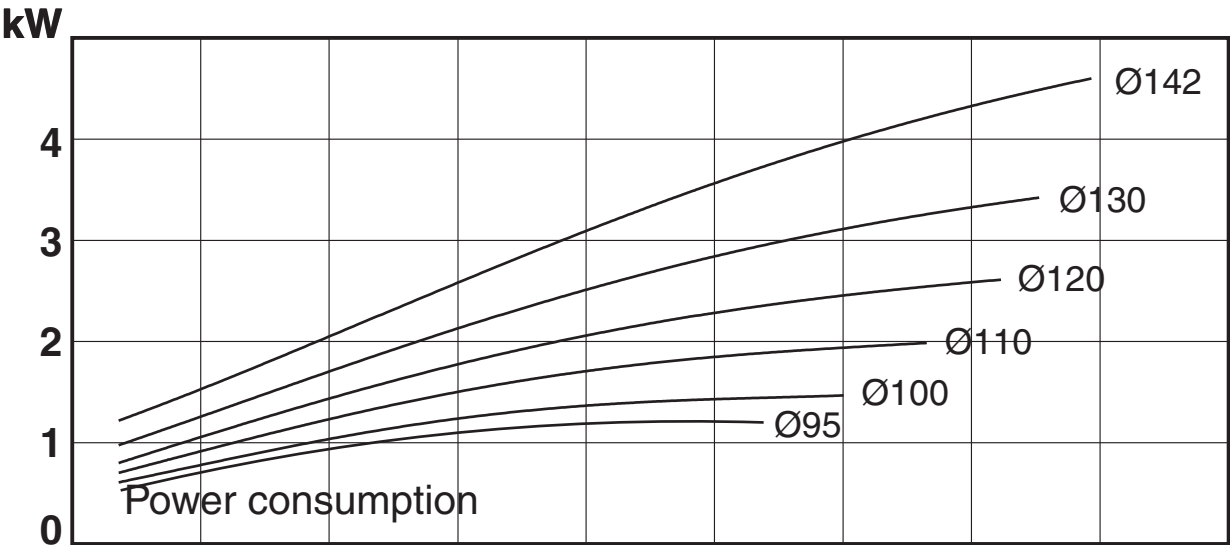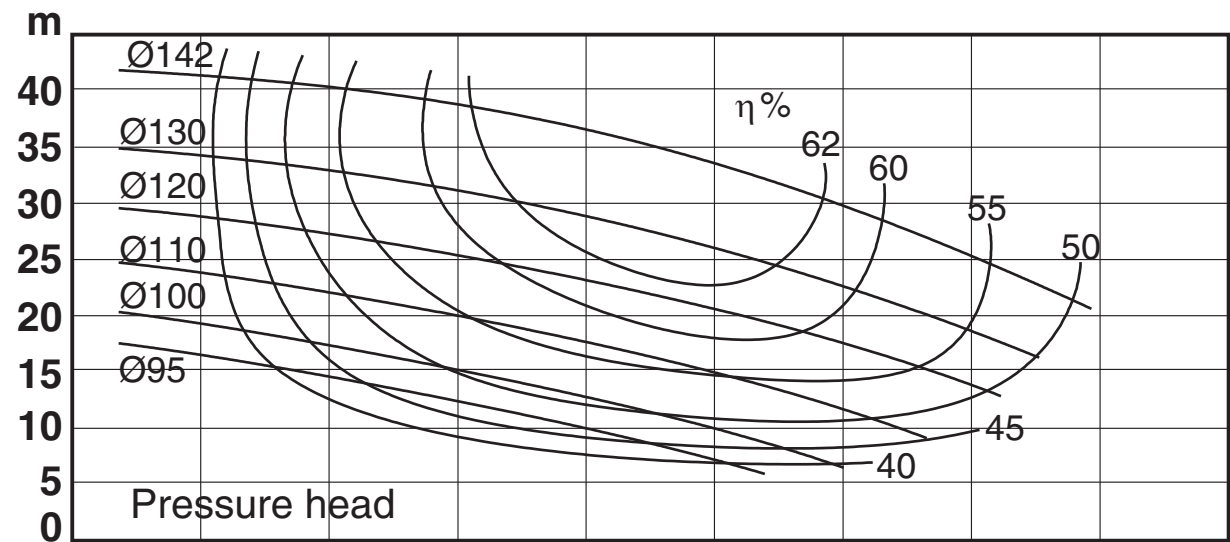

NOTE: _____

Speed: **$n=1450^{-1}$ 50 Hz**
 Impeller: **Max. dia 290 mm**
Min. dia 210 mm
 Pump inlet: **NW 150**
 Pump outlet: **NW 100**

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

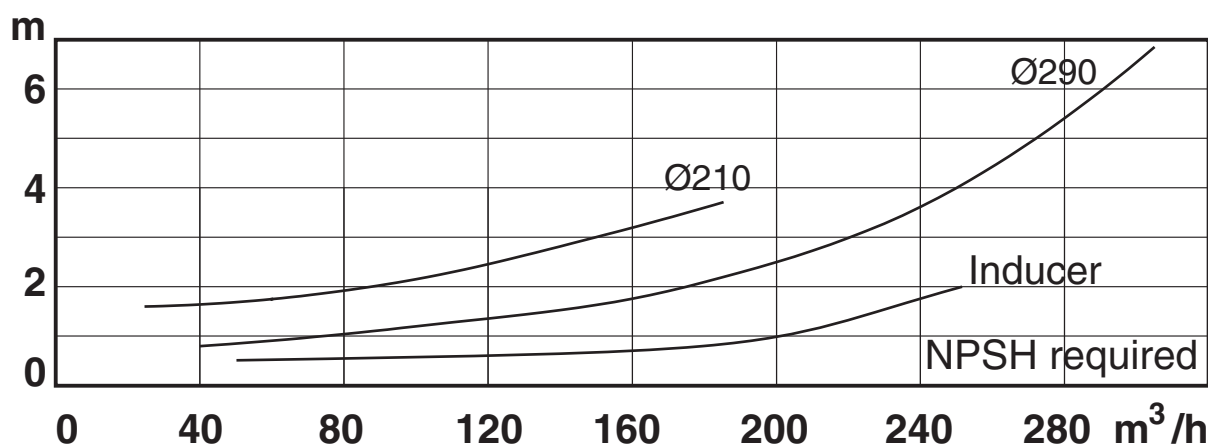
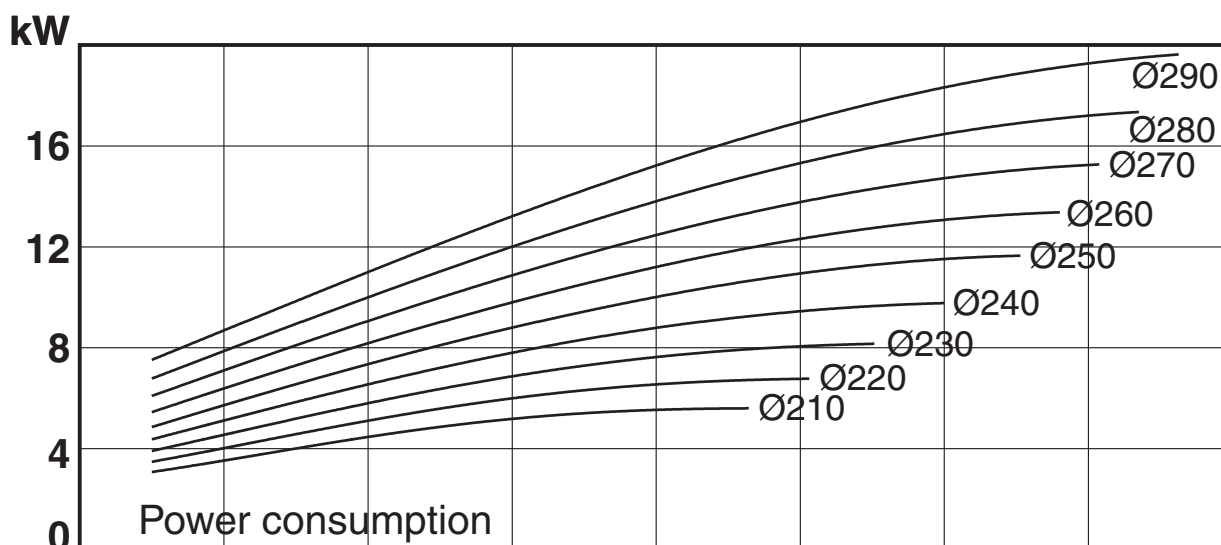
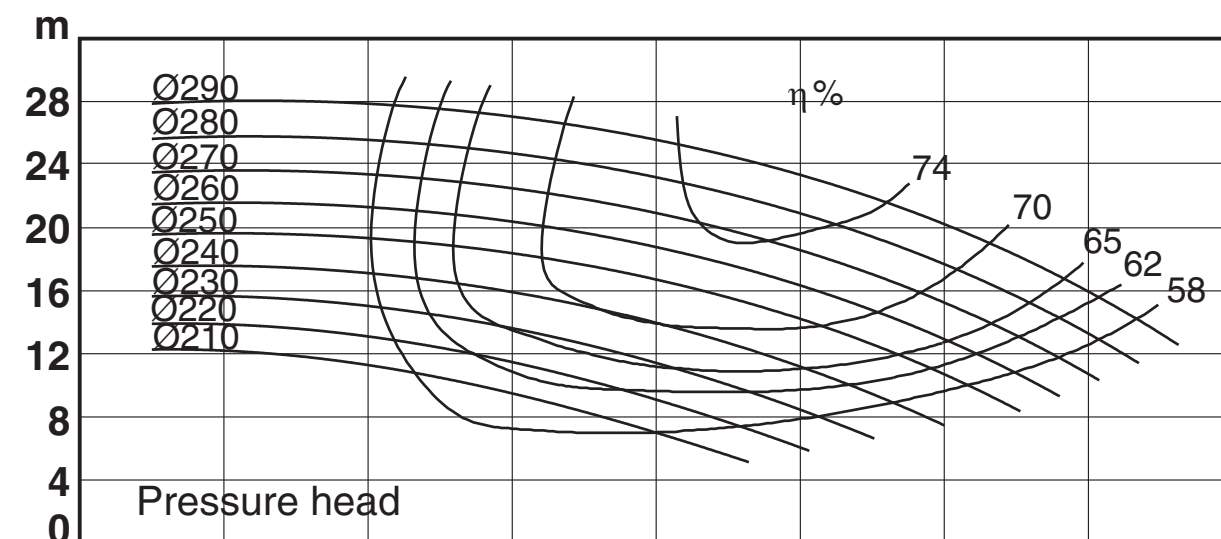


453244 ISS T 10.08

NOTE: _____

Speed: **n=1750⁻¹ 60 Hz**
Impeller: **Max. dia 290 mm**
Min. dia 210 mm
Pump inlet: **NW 150**
Pump outlet: **NW 100**




Performance data refer to water at 20°C
Permissible tolerance ±5%

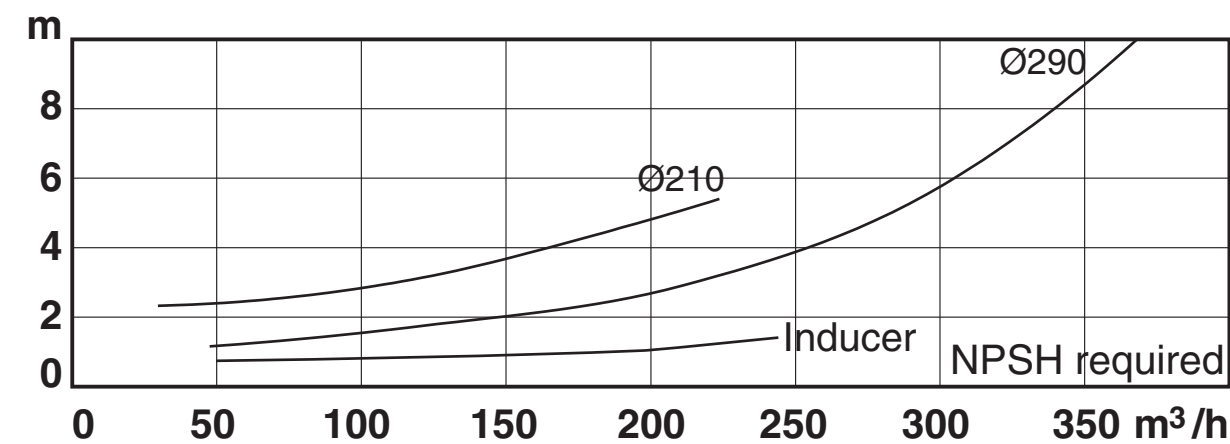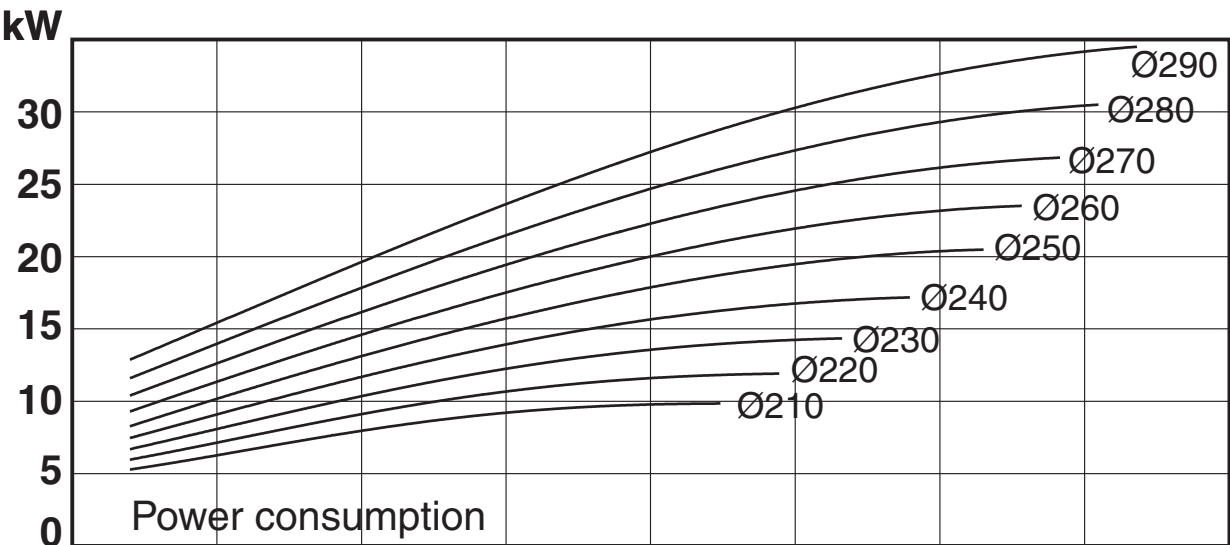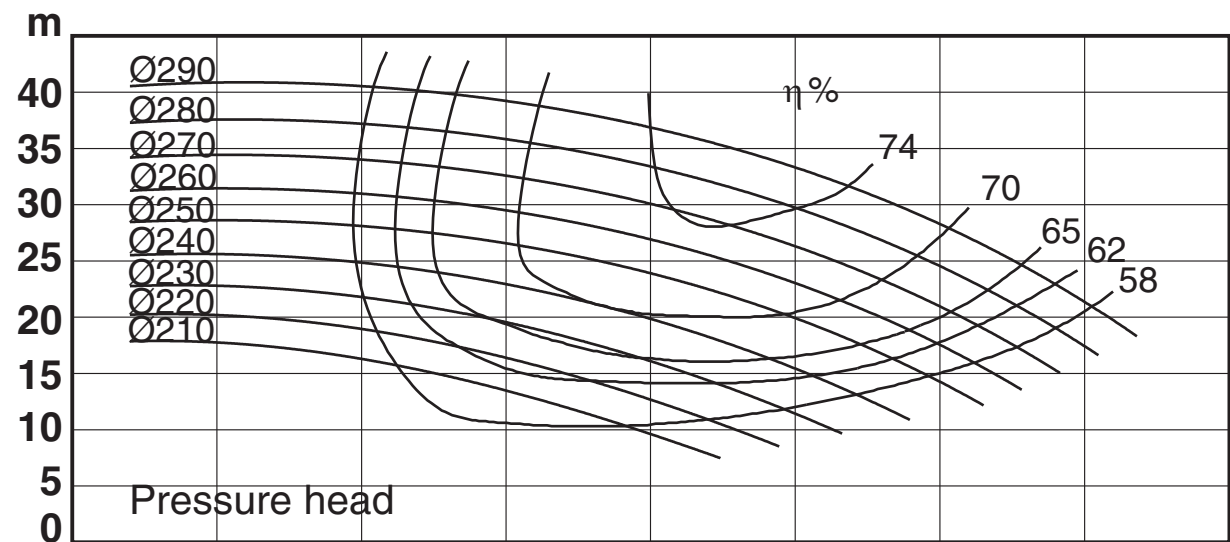

NOTE: _____

Speed: $n=1450^{-1}$ 50 Hz
 Impeller: Max. dia 170 mm
 Min. dia 110 mm
 Pump inlet: 101,6 mm
 Pump outlet: 76 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

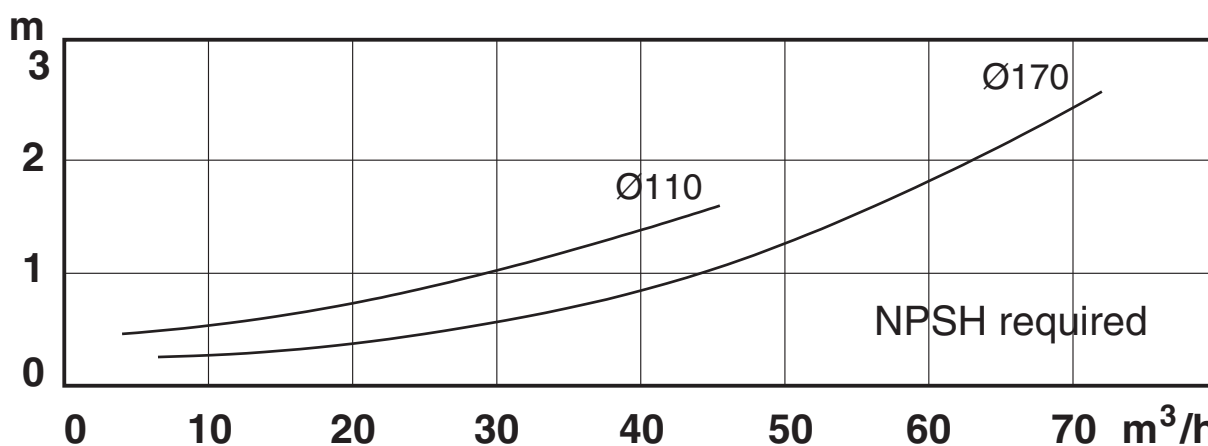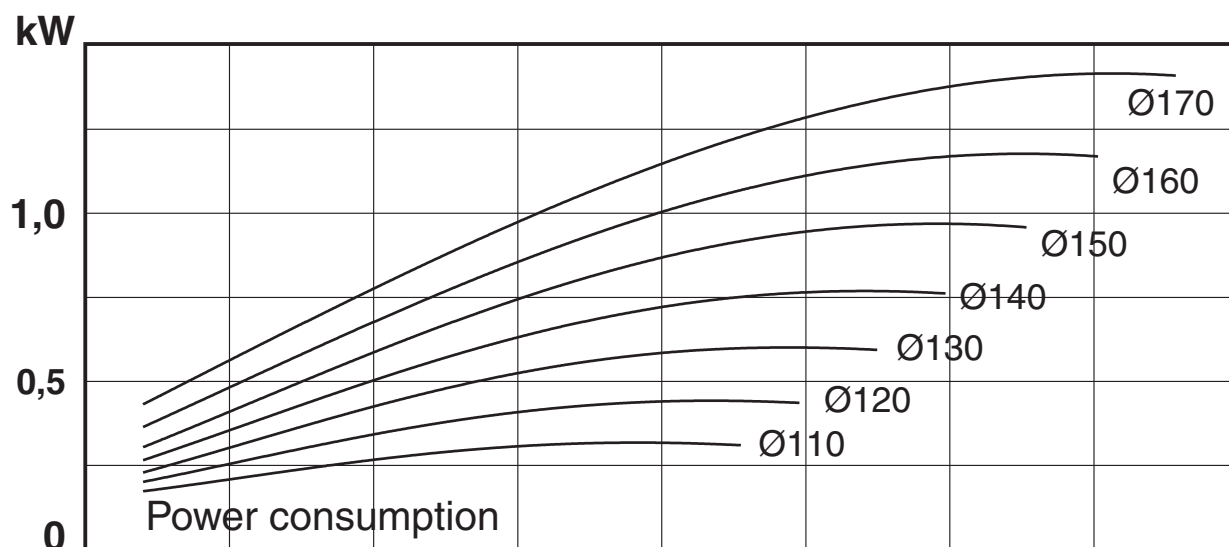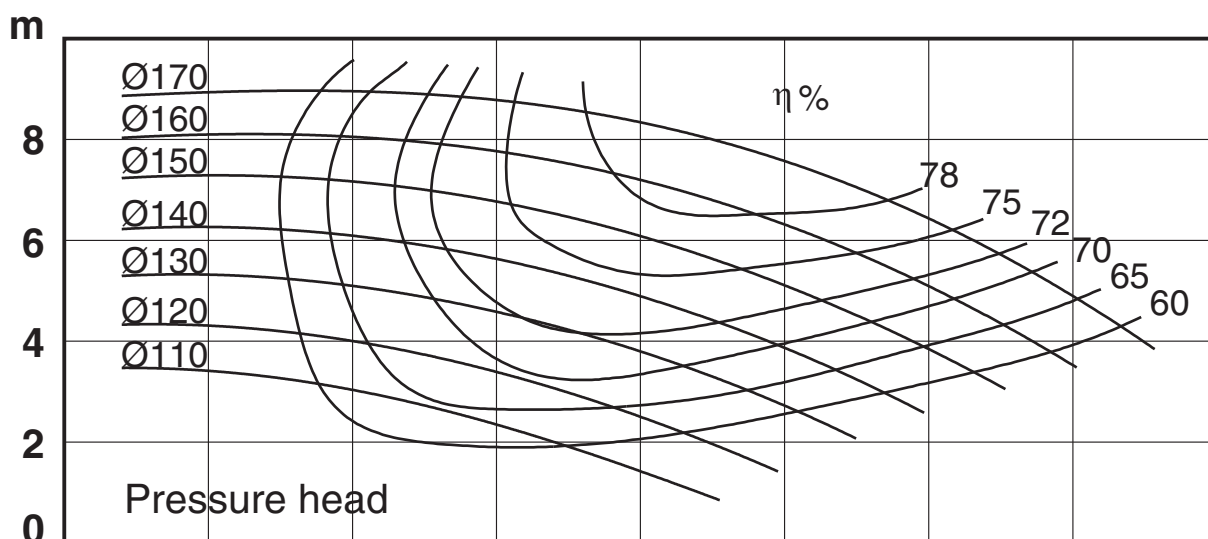

NOTE: _____

Speed: $n=2900^{-1}$ 50 Hz
 Impeller: Max. dia 170 mm
 Min. dia 110 mm
 Pump inlet: 101,6 mm
 Pump outlet: 76 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

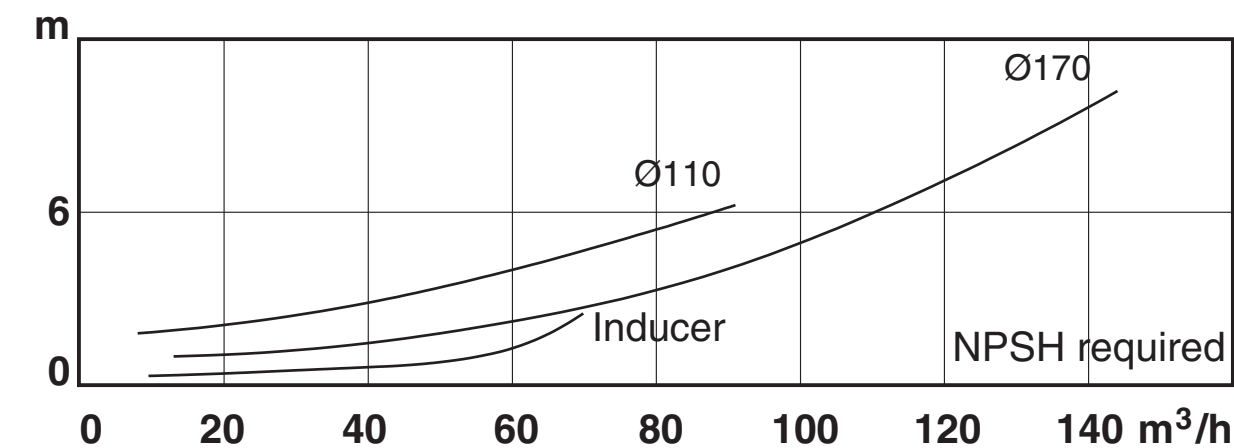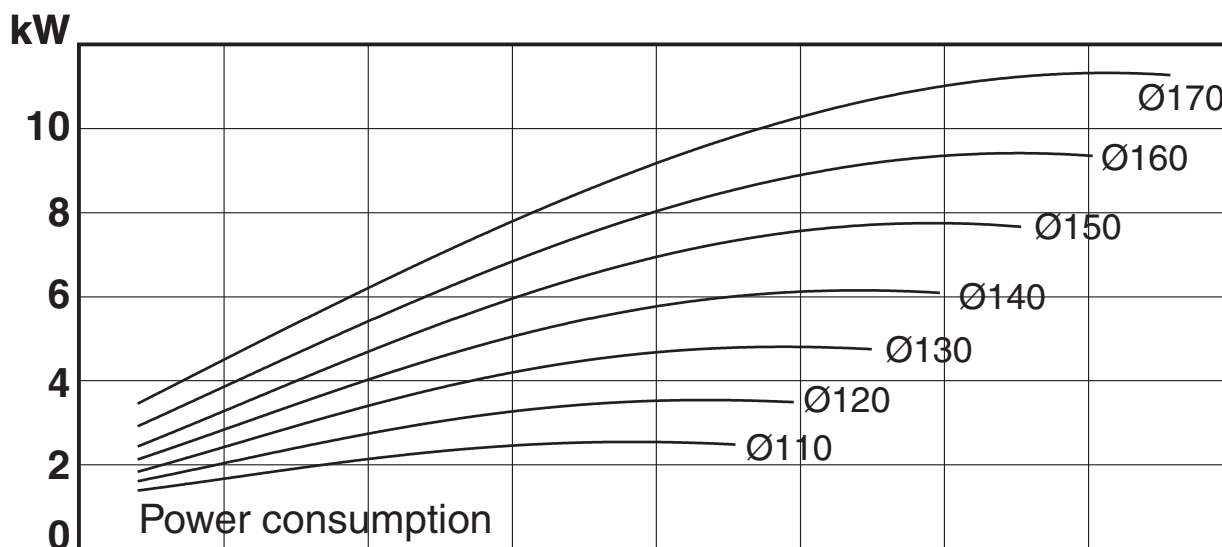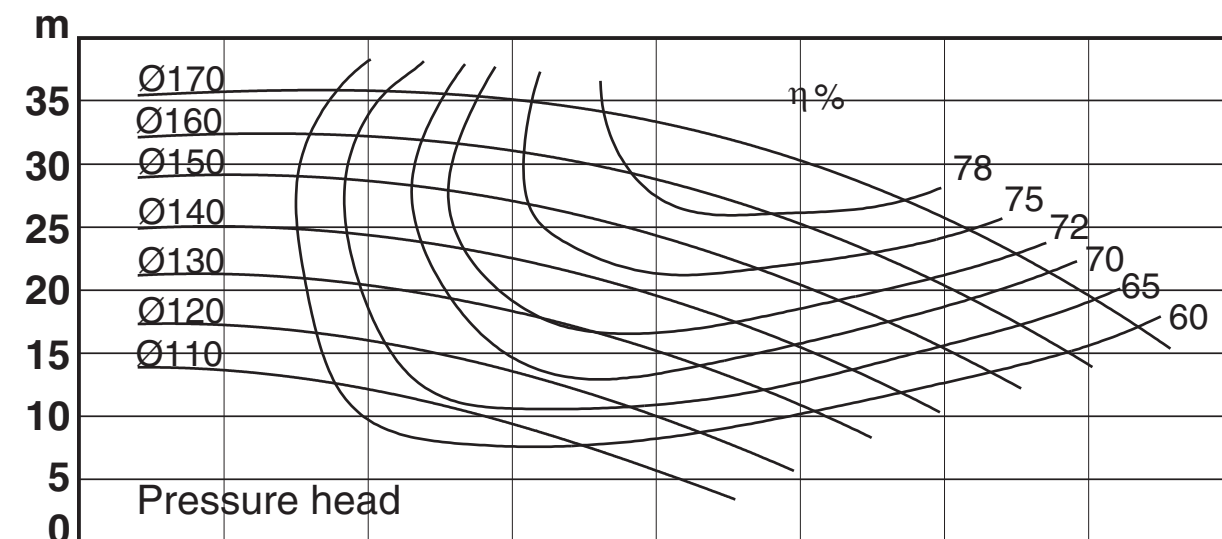

NOTE: _____

Speed: $n=1750^{-1}$ 60 Hz
 Impeller: Max. dia 170 mm
 Min. dia 110 mm
 Pump inlet: 101,6 mm
 Pump outlet: 76 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

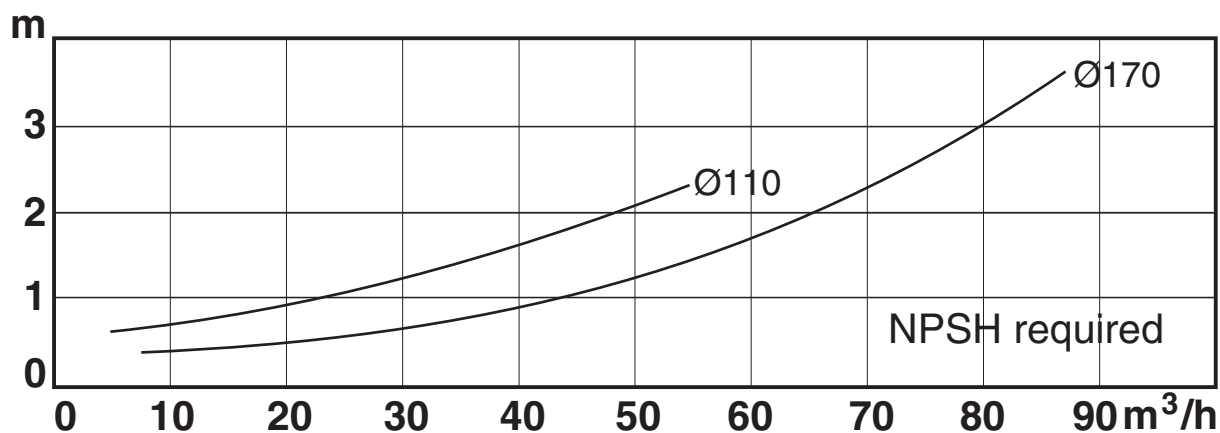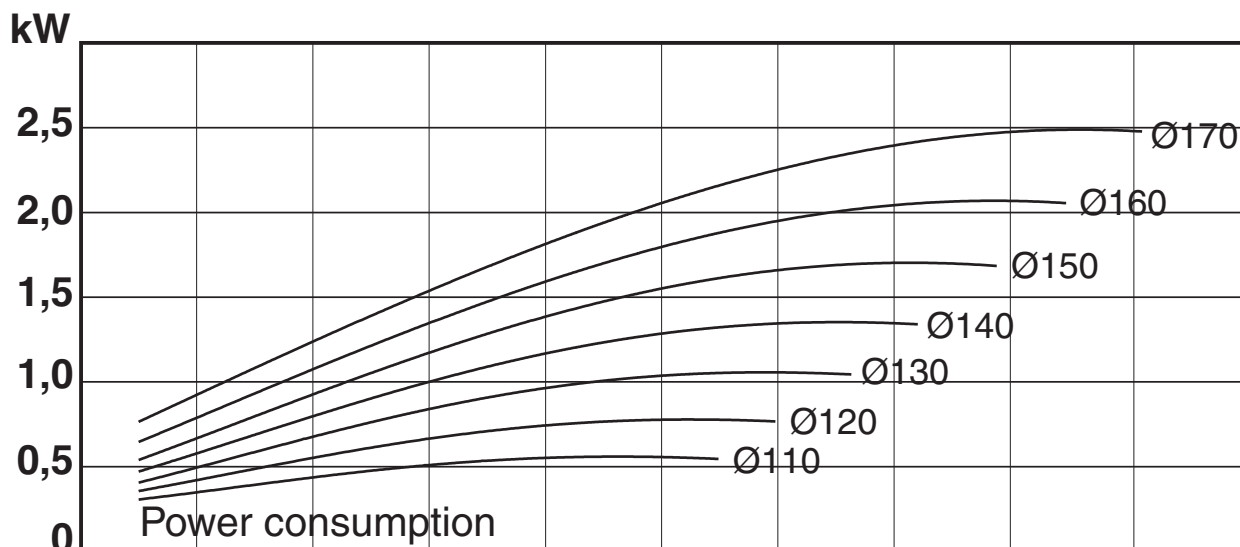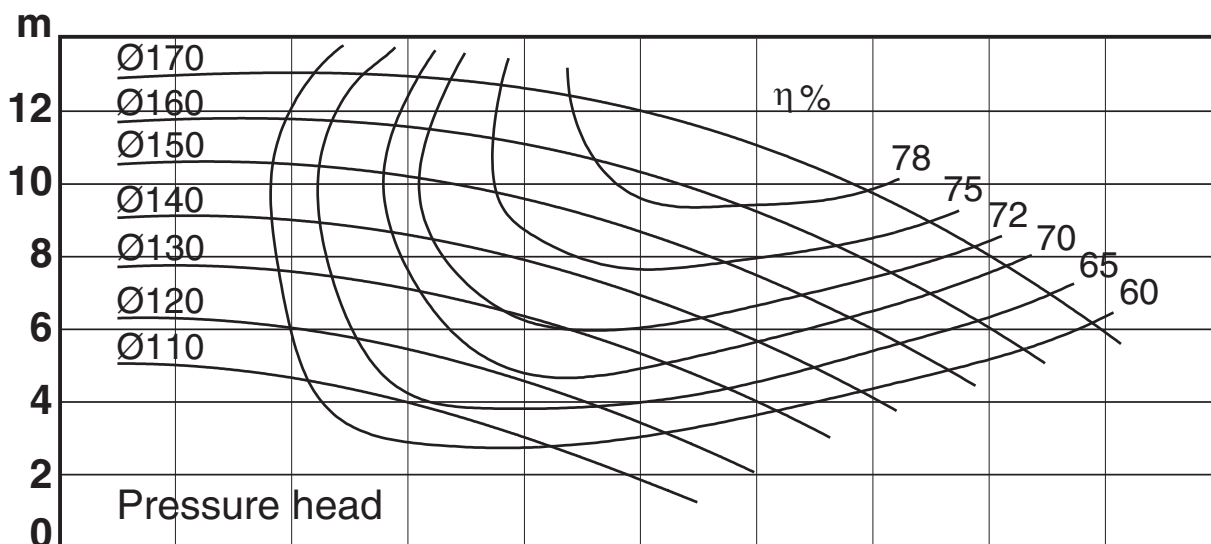

NOTE: _____

Speed: $n=3500 \text{ }^{-1}$ 60 Hz
 Impeller: Max. dia 170 mm
 Min. dia 110 mm
 Pump inlet: 101,6 mm
 Pump outlet: 76 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

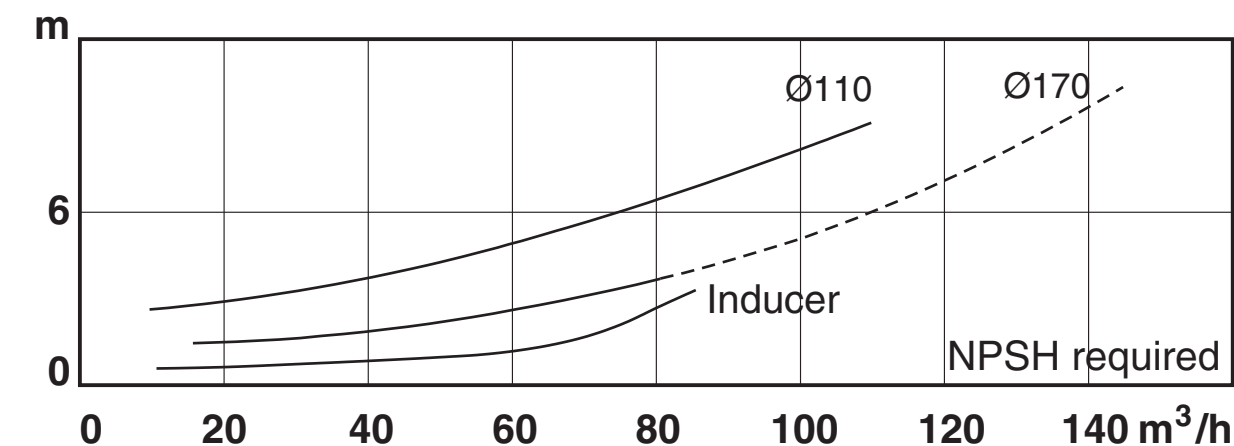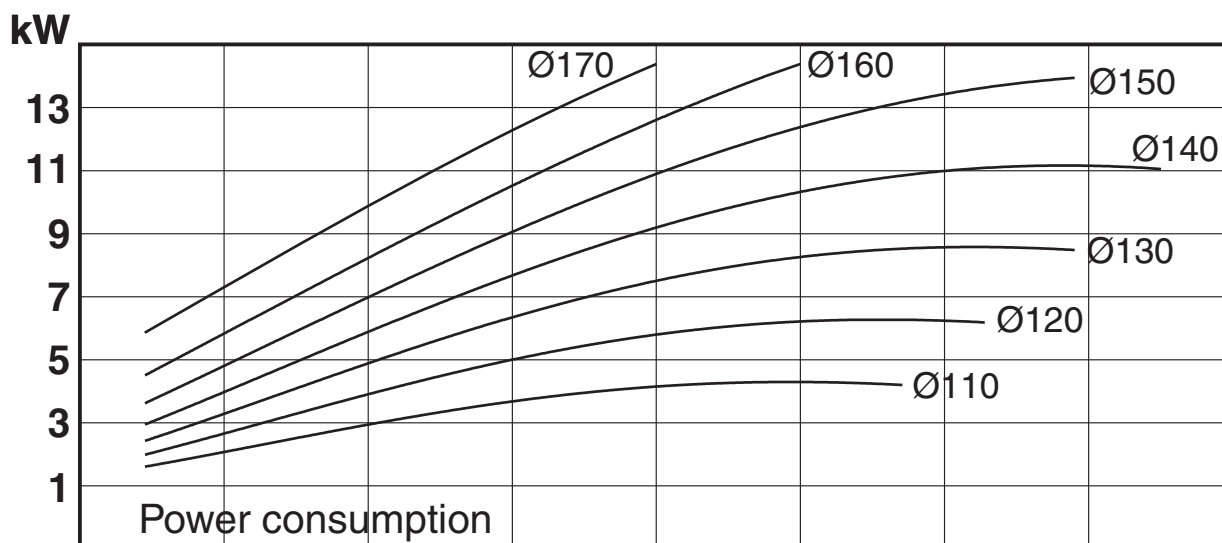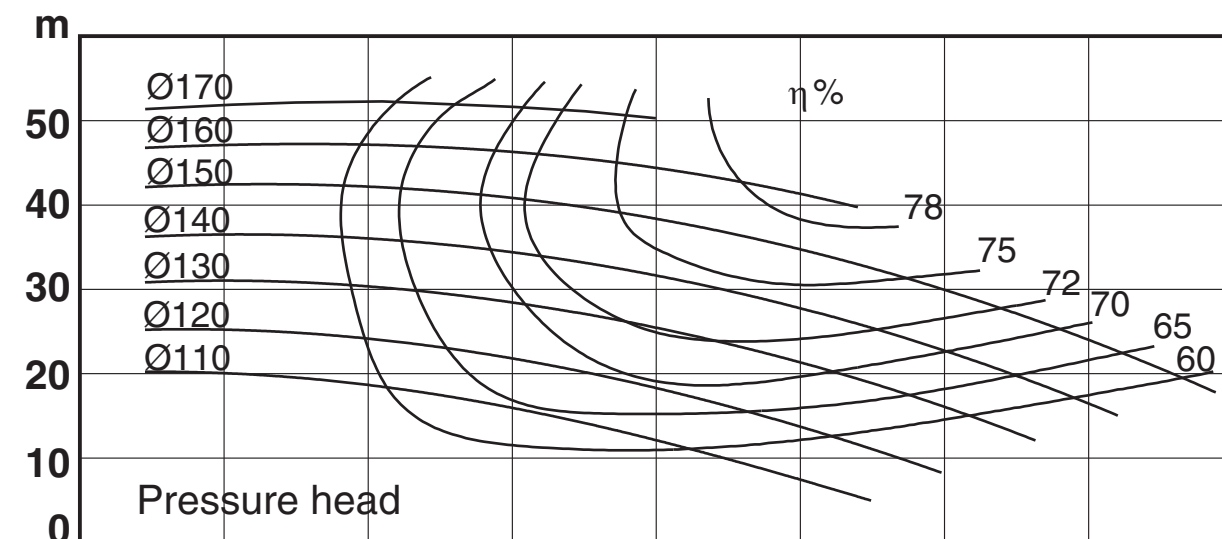

NOTE: _____

Speed: $n=1450^{-1}$ 50 Hz
 Impeller: Max. dia 175 mm
 Min. dia 135 mm
 Pump inlet: 101,6 mm
 Pump outlet: 76 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

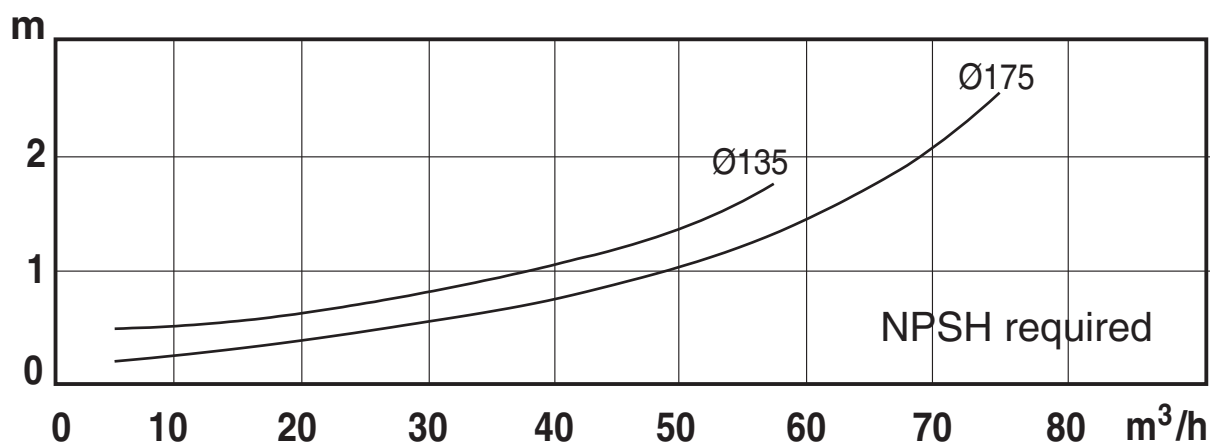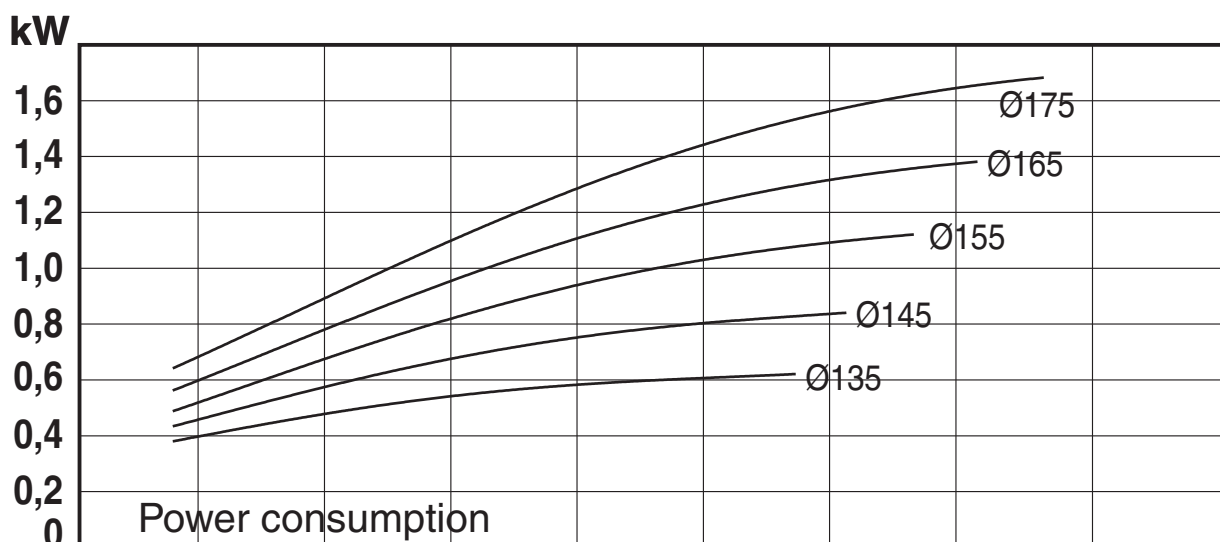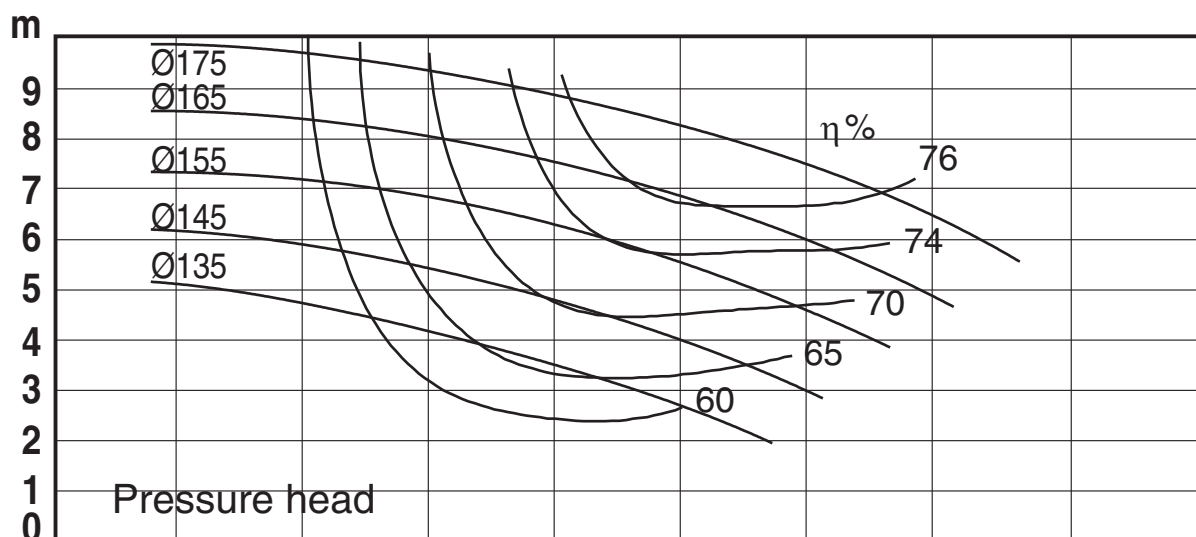

NOTE: _____

Speed: $n=2900\text{ }^{-1}$ 50 Hz
Impeller: Max. dia 175 mm
Min. dia 135 mm
Pump inlet: 101,6 mm
Pump outlet: 76 mm




Performance data refer to water at 20°C
Permissible tolerance $\pm 5\%$

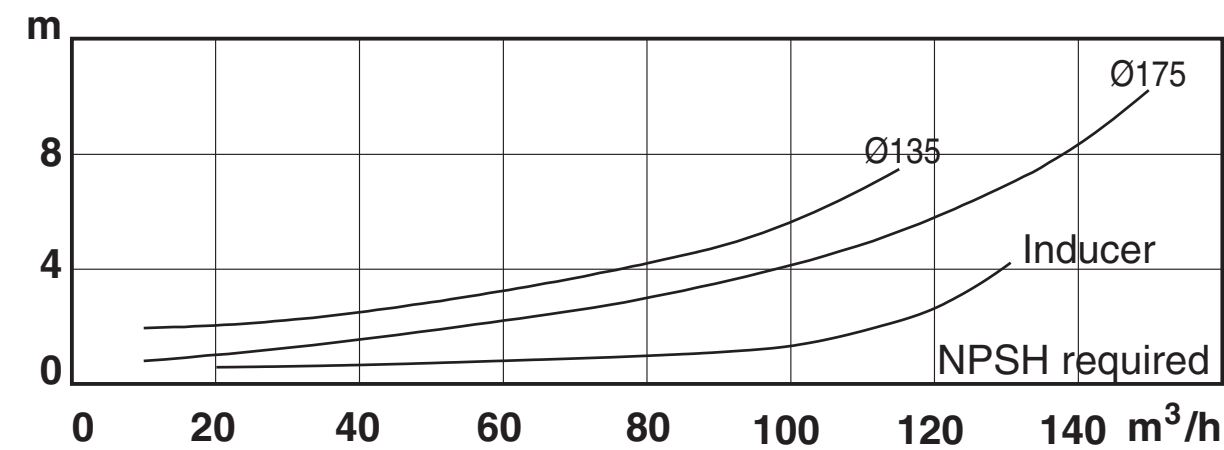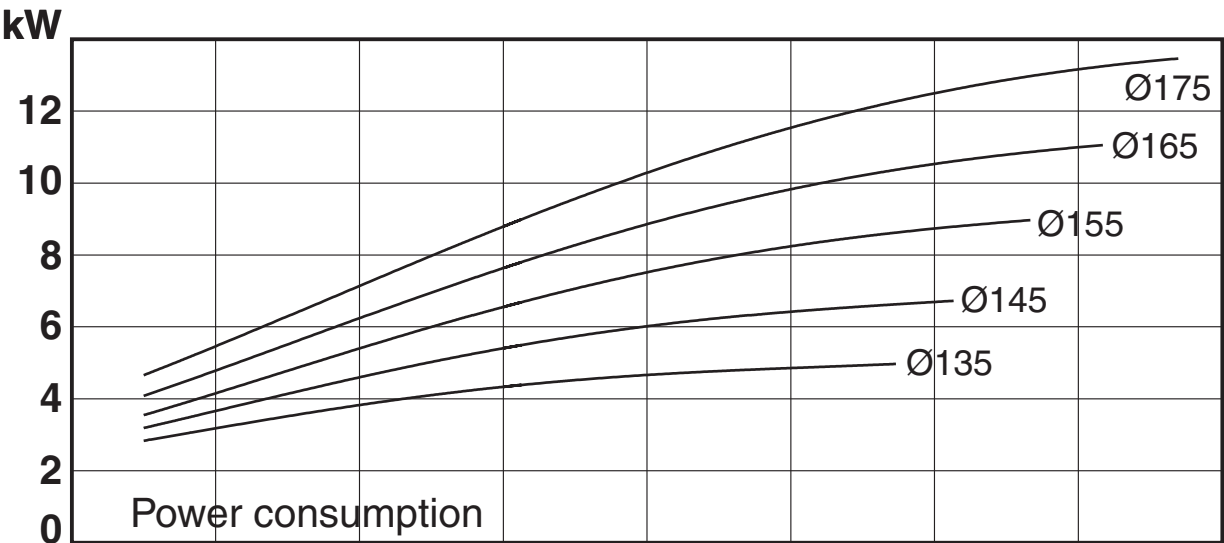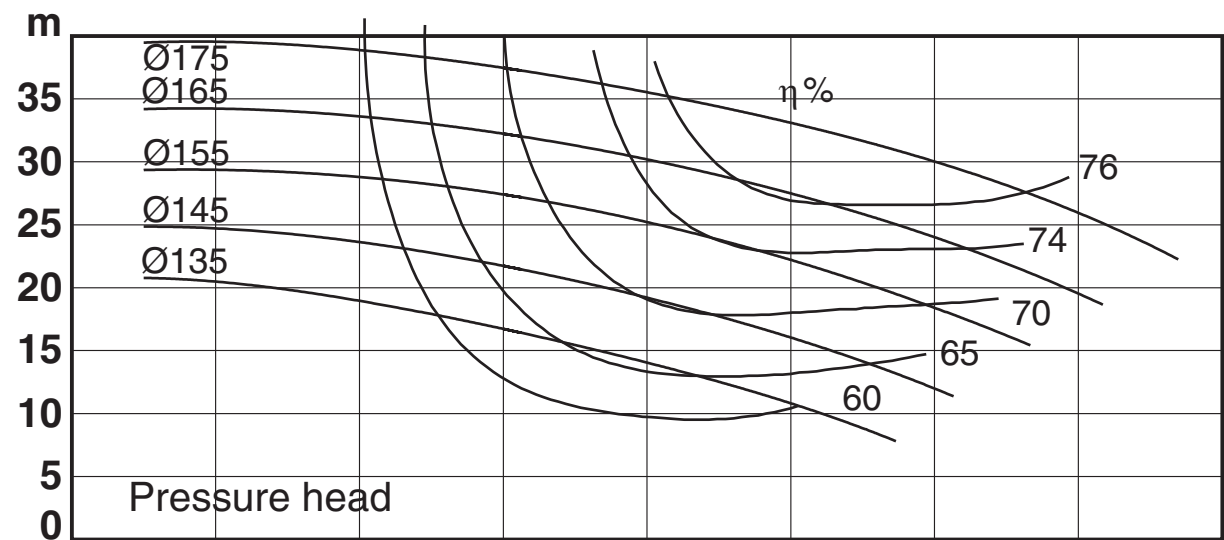

NOTE: _____

Speed: $n=1750^{-1}$ 60 Hz
 Impeller: Max. dia 175 mm
 Min. dia 135 mm
 Pump inlet: 101,6 mm
 Pump outlet: 76 mm

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

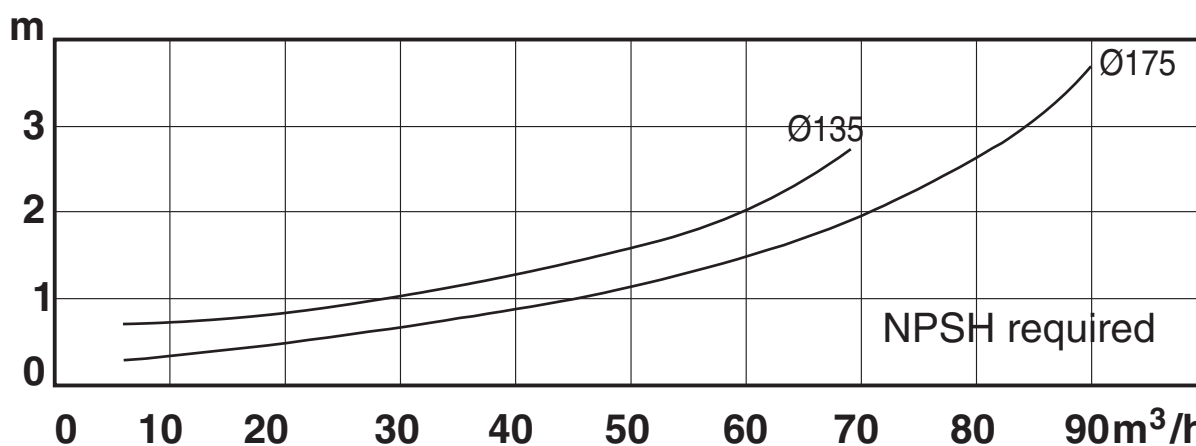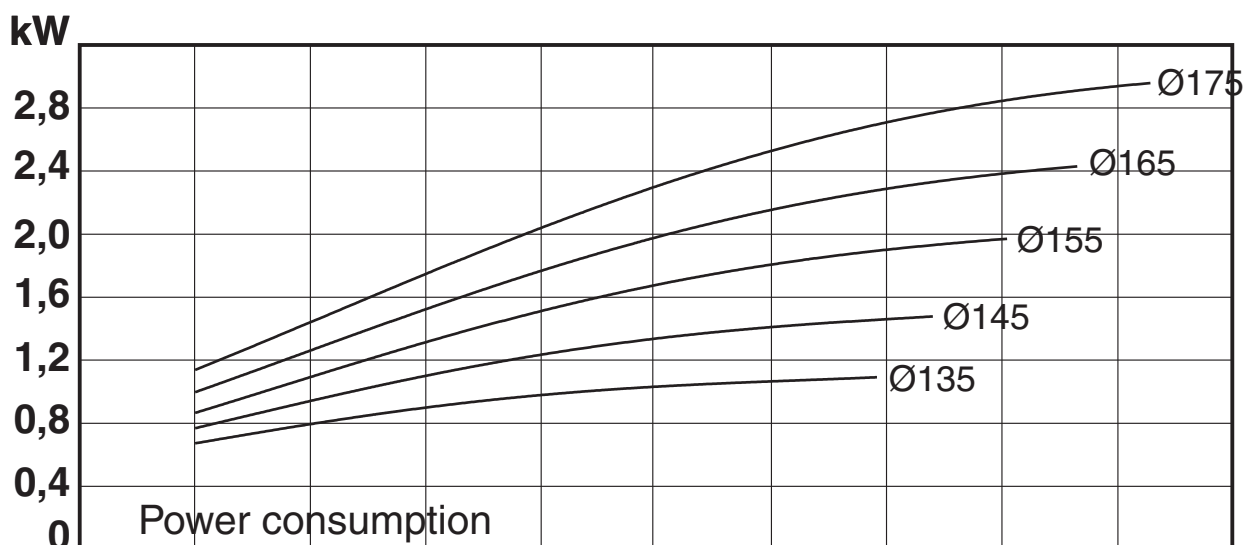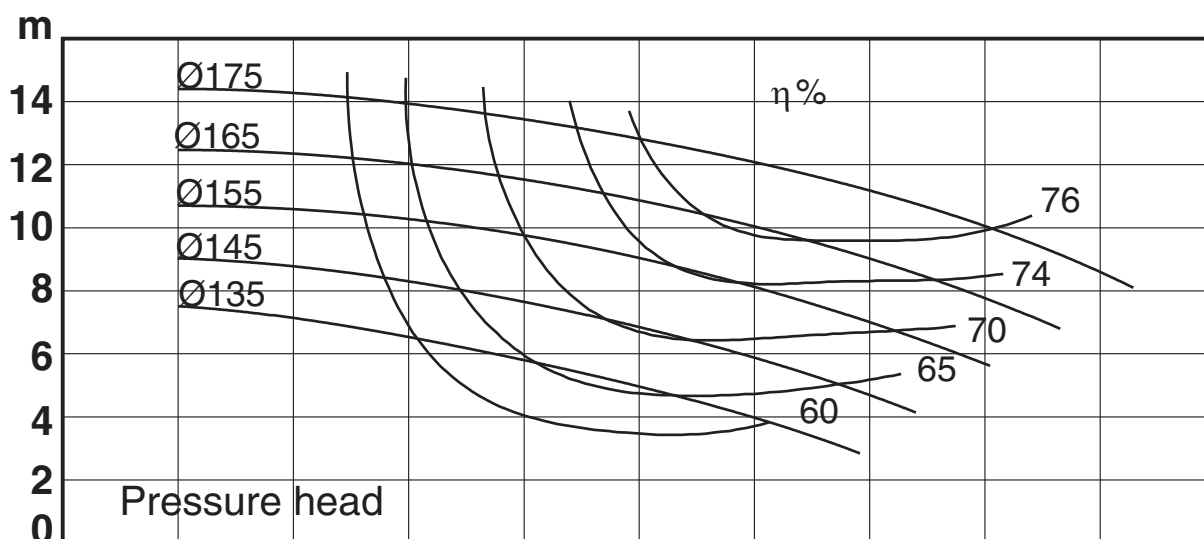


453246 ISS T 10.08

NOTE: _____

Speed: **n=3500⁻¹ 60 Hz**
Impeller: **Max. dia 175 mm**
Min. dia 135 mm
Pump inlet: **101,6 mm**
Pump outlet: **76 mm**

Performance data refer to water at 20°C
Permissible tolerance ±5%

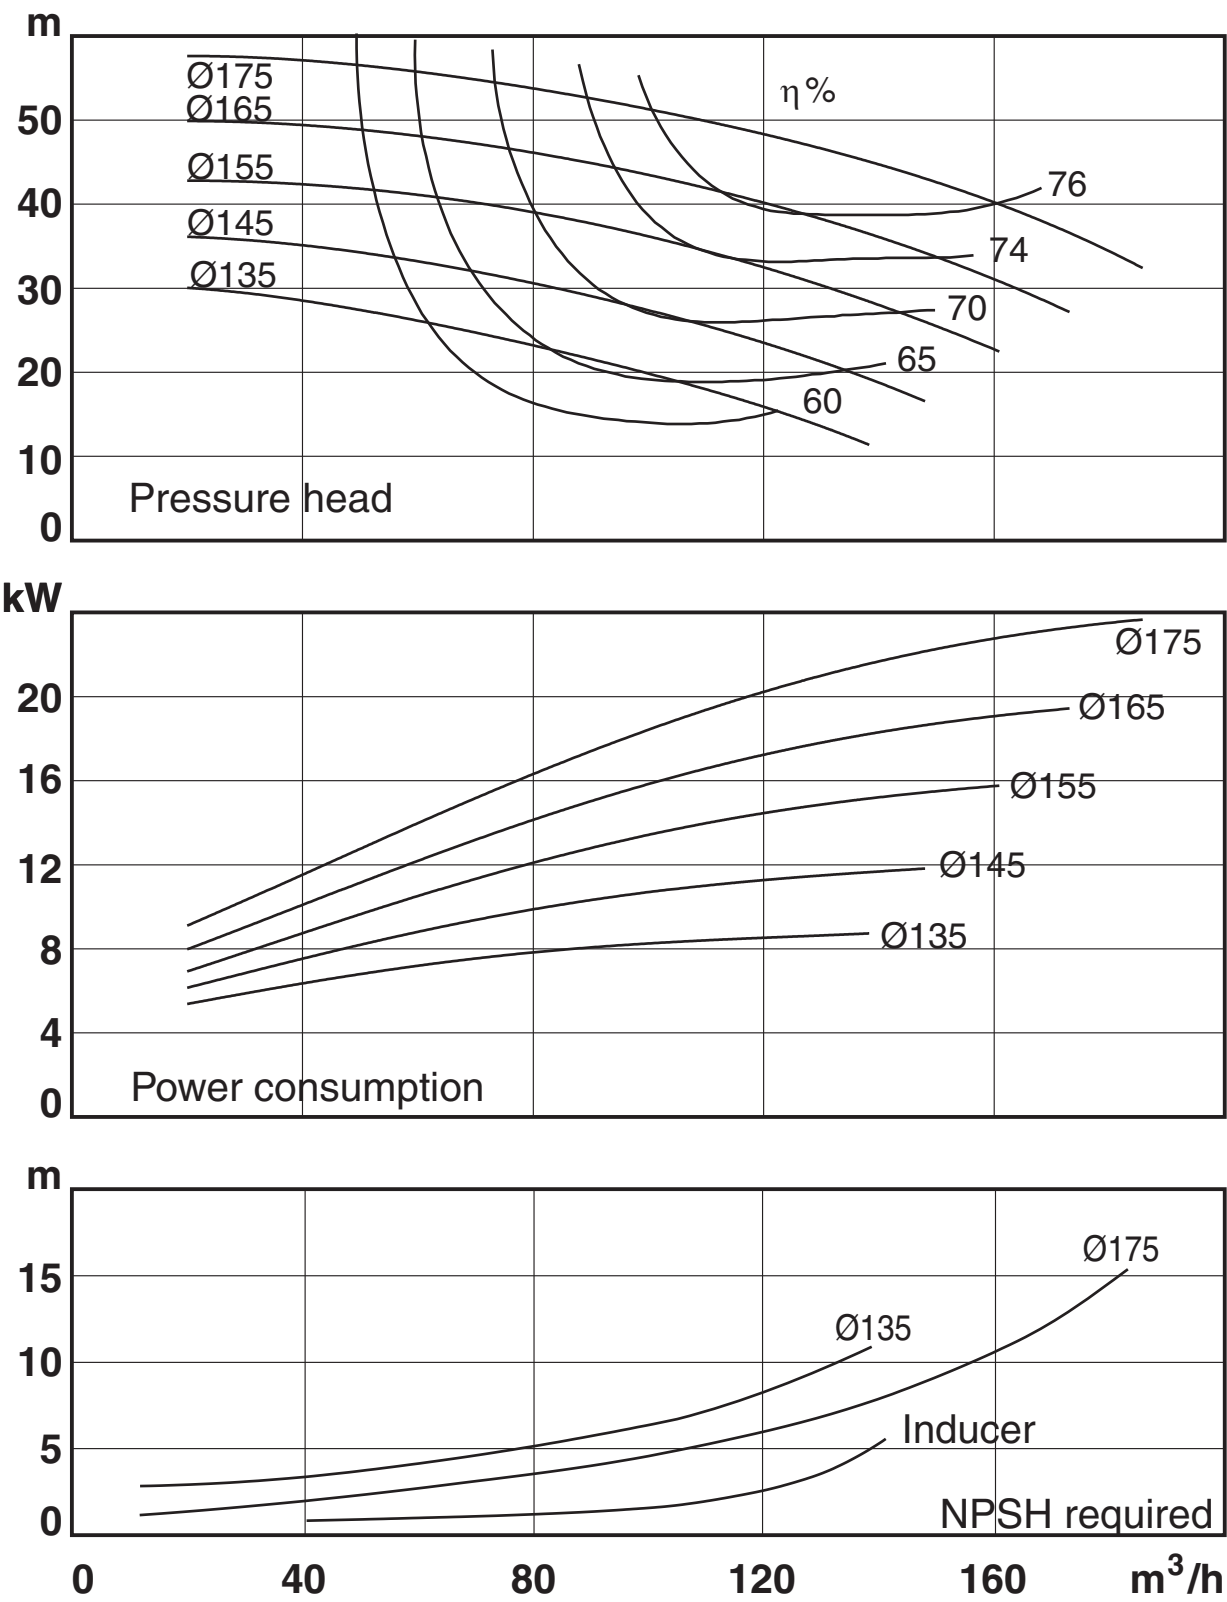

NOTE: _____


Low flow impeller

Speed: **$n=1450^{-1}$ 50 Hz**
 Impeller: **Max. dia 175 mm**
Min. dia 130 mm


Pump inlet: **63,5 mm**
 Pump outlet: **51 mm**

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

m

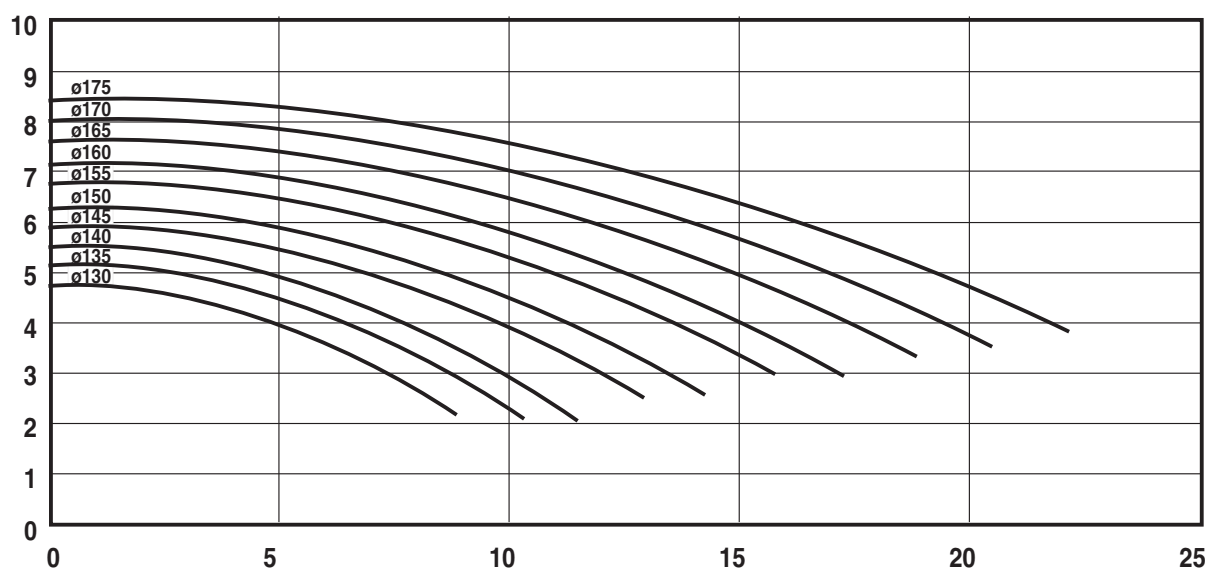

kW

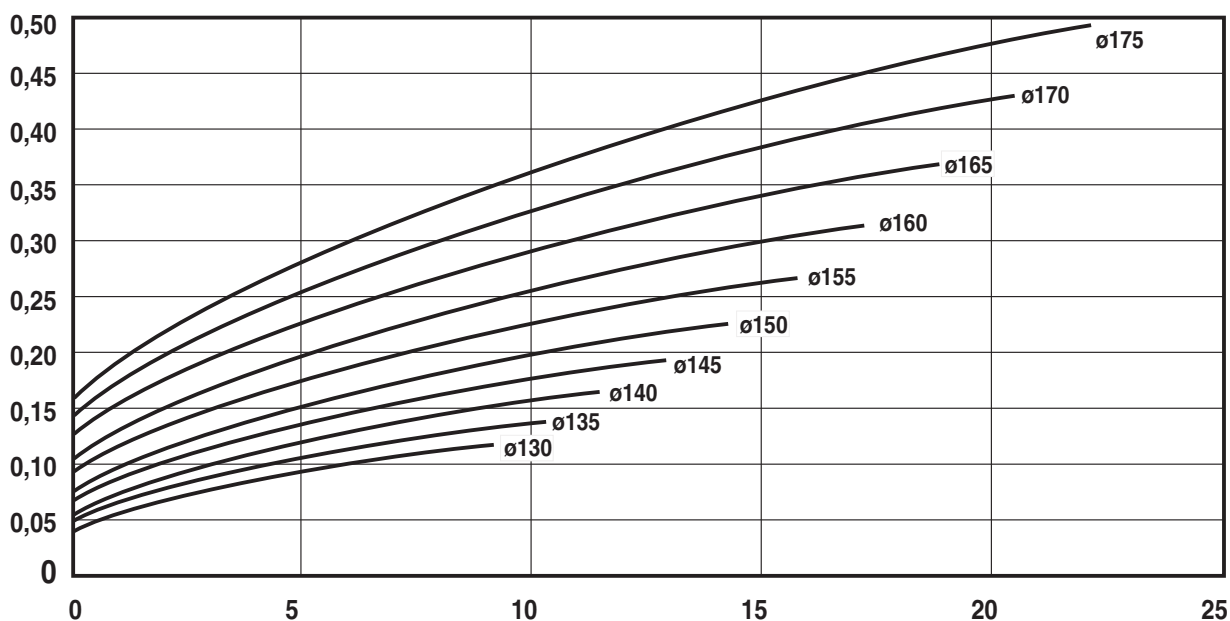

Flow m³/h



NOTE: _____

Low flow impeller

Speed: **n=2900⁻¹ 50 Hz**
 Impeller: **Max. dia 175 mm**
Min. dia 130 mm

Pump inlet: **63,5 mm**
 Pump outlet: **51 mm**



Performance data refer to water at 20°C
 Permissible tolerance ±5%

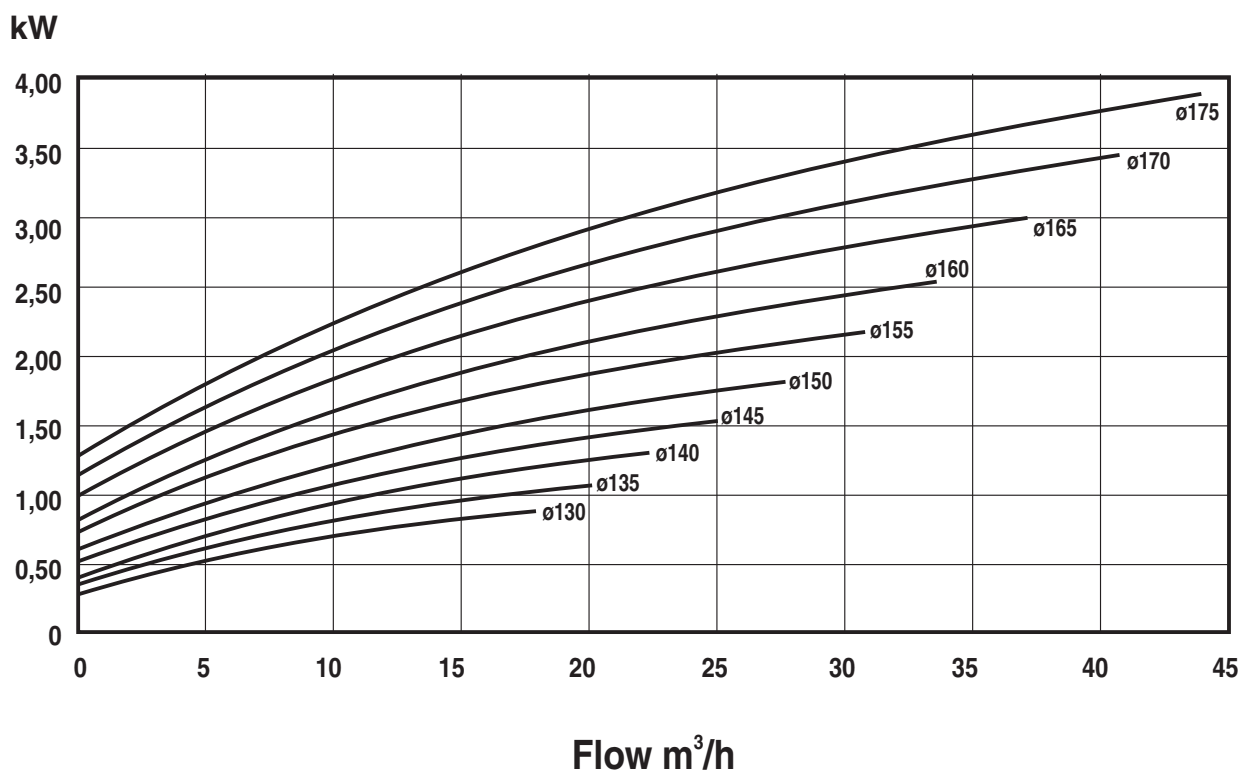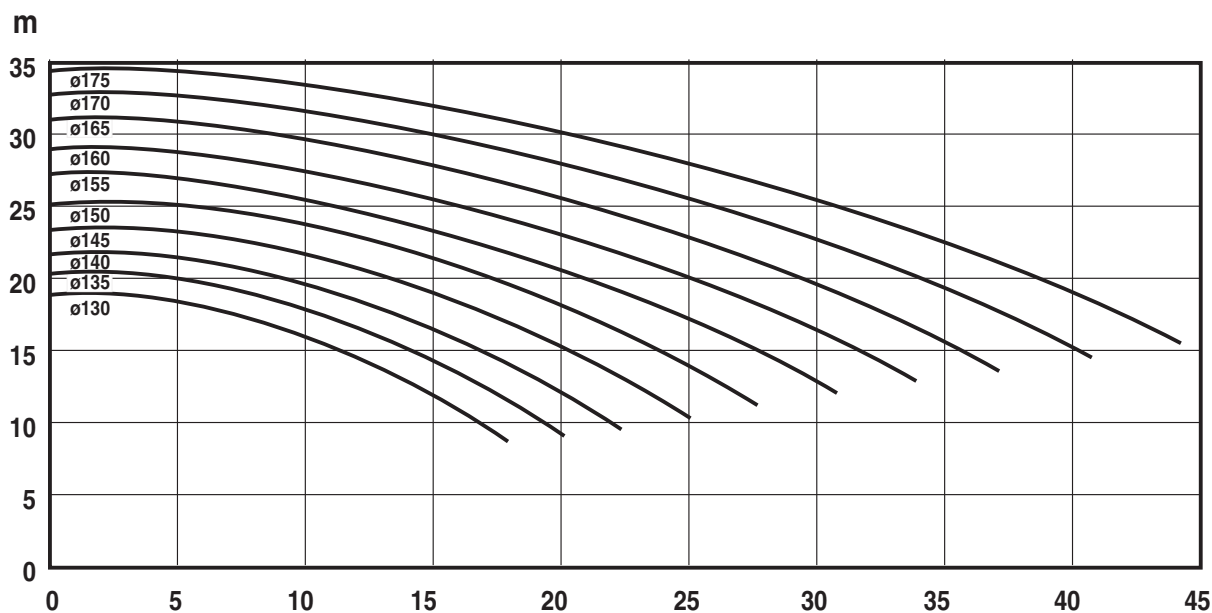

NOTE: _____

Low flow impeller
Speed: **n=1750⁻¹ 60 Hz**
Impeller: **Max. dia 175 mm**
Min. dia 130 mm
Pump inlet: **63,5 mm**
Pump outlet: **51 mm**

Performance data refer to water at 20°C
Permissible tolerance ±5%

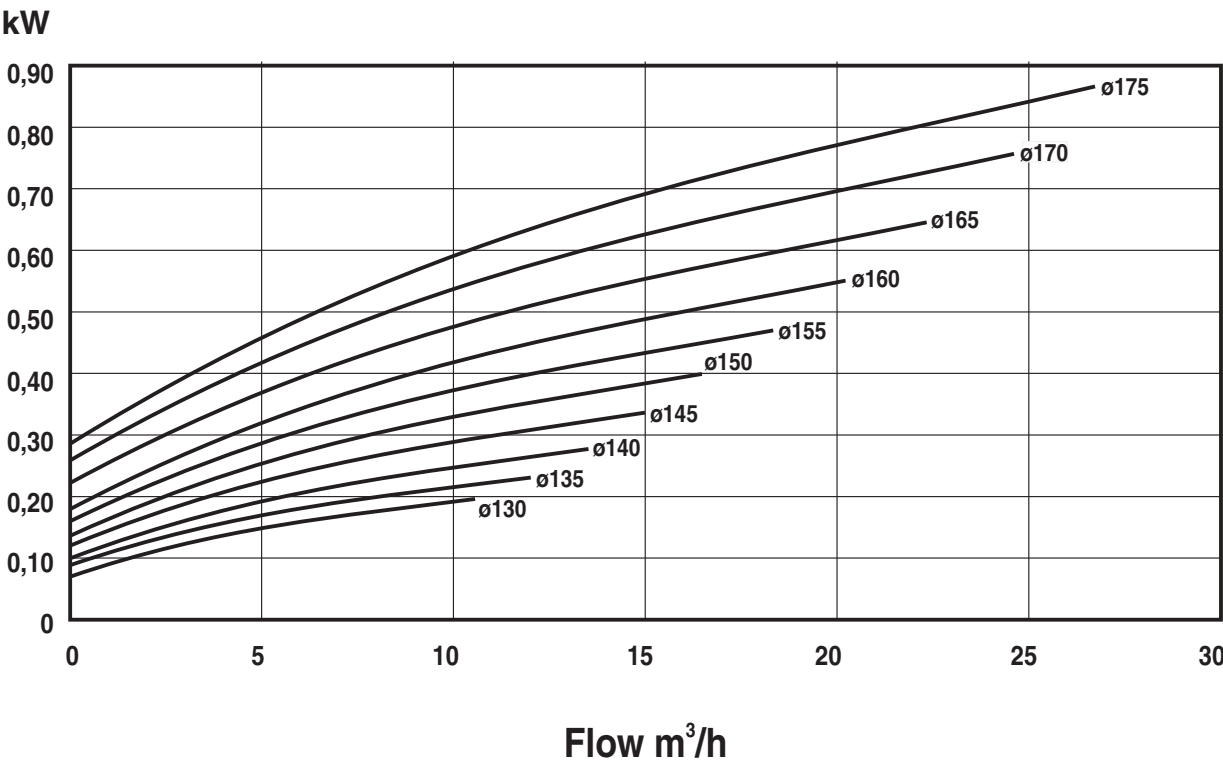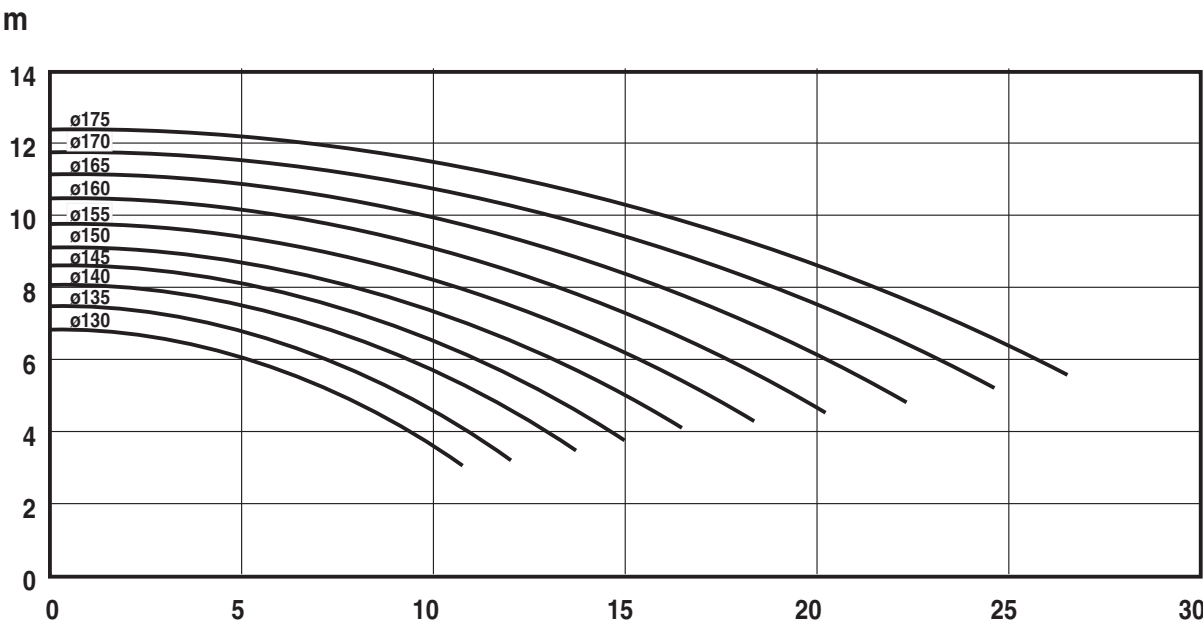

NOTE: _____


Low flow impeller

Speed: **$n=3500^{-1}$ 60 Hz**
 Impeller: **Max. dia 175 mm**
Min. dia 130 mm


Pump inlet: **63,5 mm**
 Pump outlet: **51 mm**

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

m

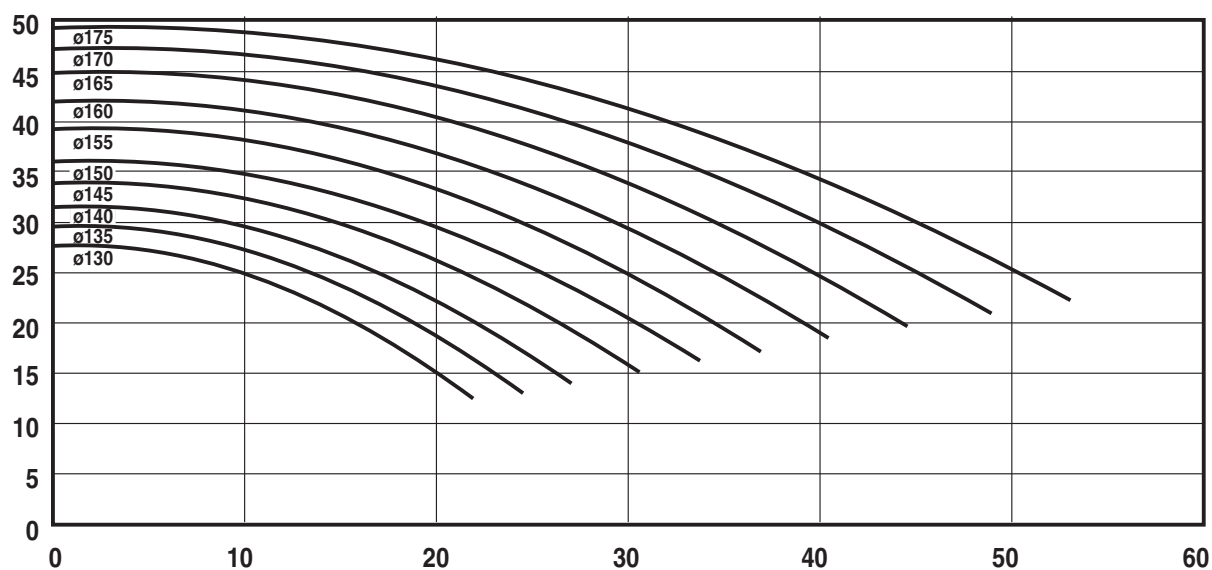

kW



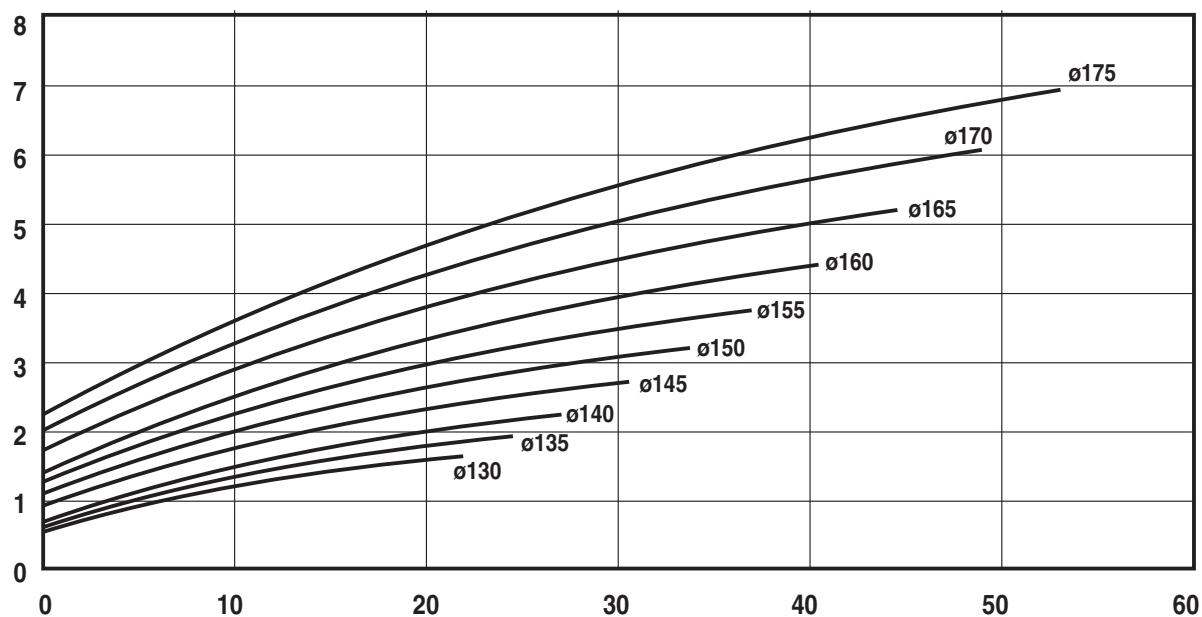


Flow m³/h

NOTE: _____

Speed: $n=1450^{-1}$ 50 Hz
 Impeller: Max. dia 175 mm
 Min. dia 125 mm
 Pump inlet: 63,5 mm
 Pump outlet: 51 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

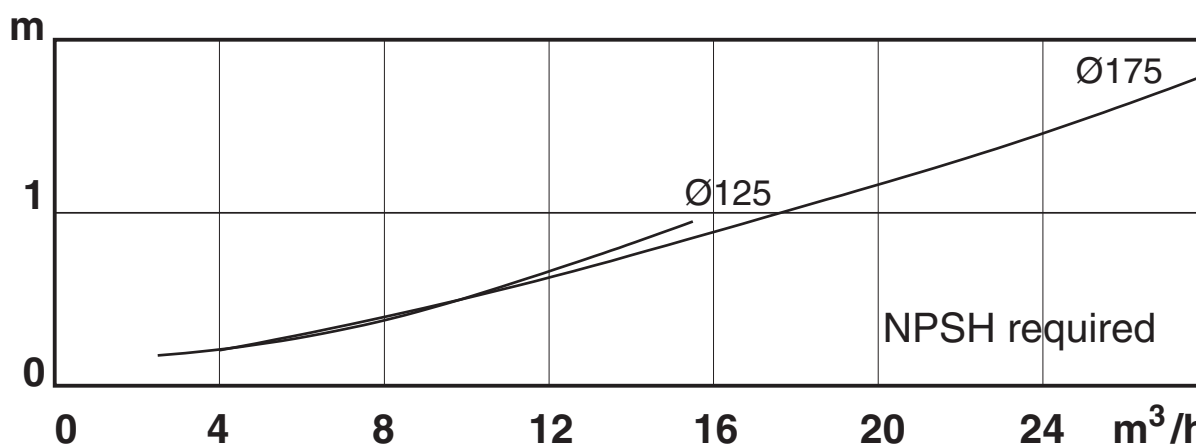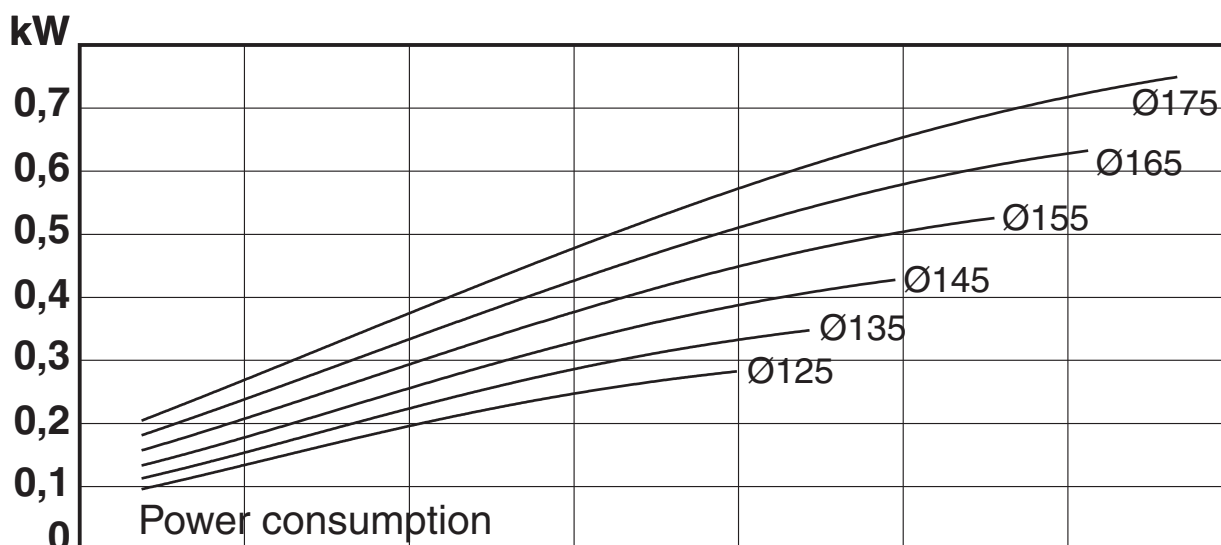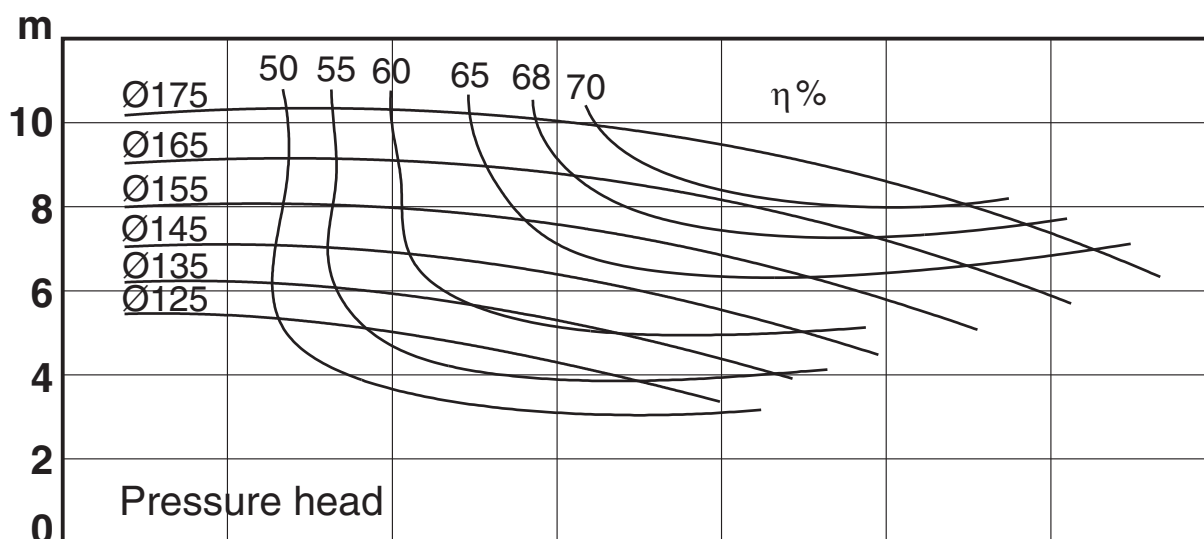

NOTE: _____

Speed: **n=2900⁻¹ 50 Hz**
Impeller: **Max. dia 175 mm**
Min. dia 125 mm
Pump inlet: **63,5 mm**
Pump outlet: **51 mm**




Performance data refer to water at 20°C
Permissible tolerance ±5%

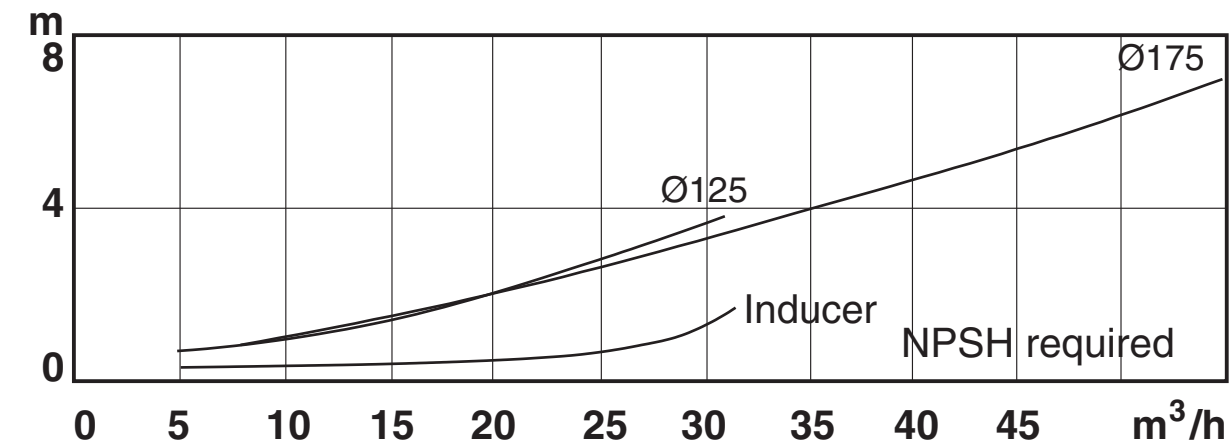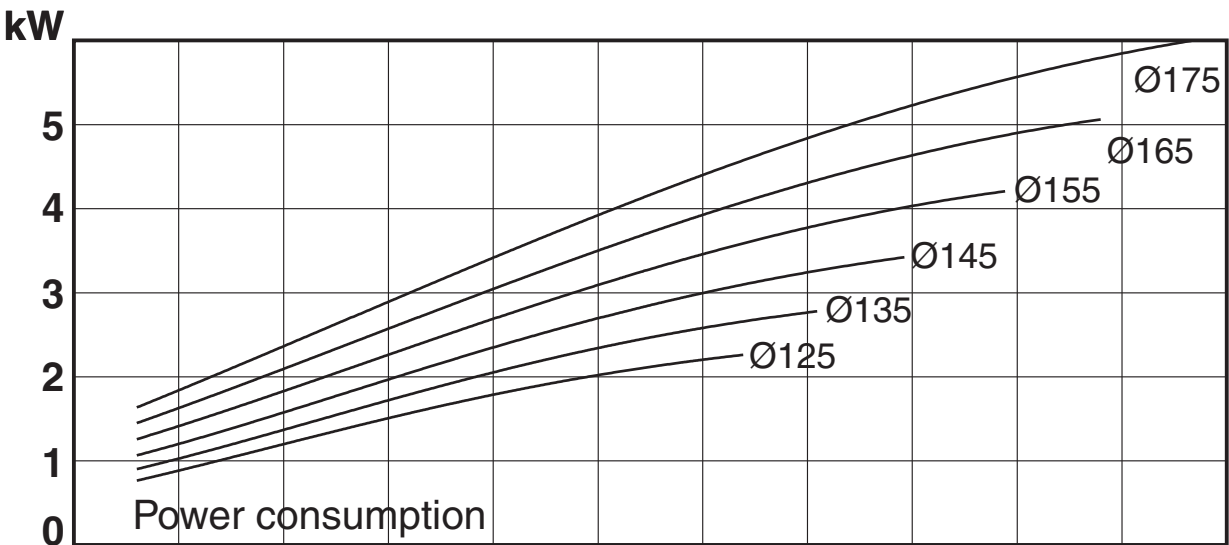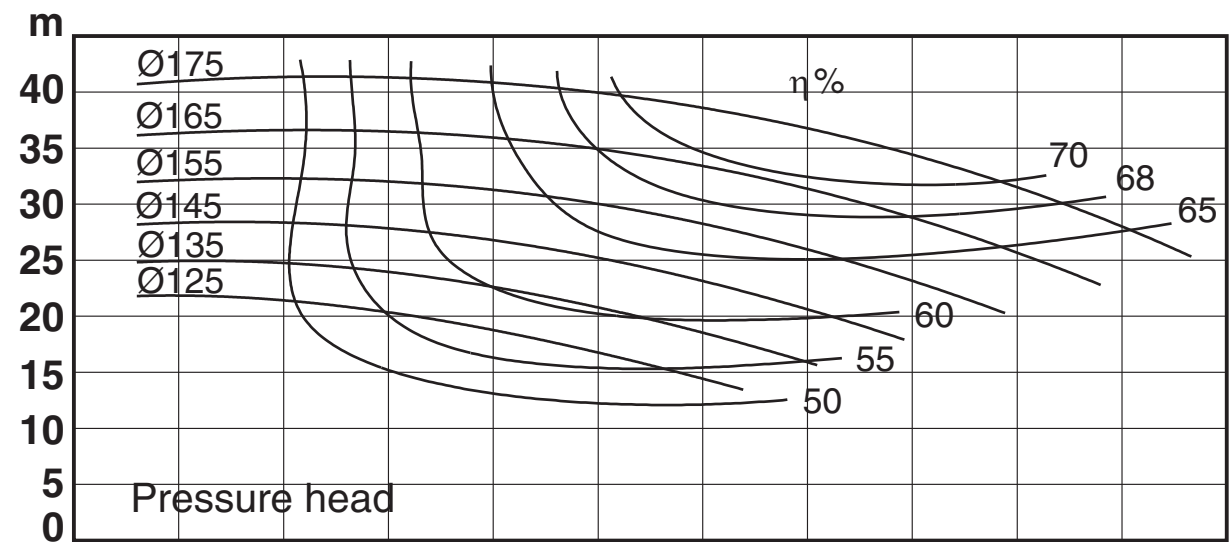

NOTE: _____

Speed: $n=1750^{-1}$ 60 Hz
 Impeller: Max. dia 175 mm
 Min. dia 125 mm
 Pump inlet: 63,5 mm
 Pump outlet: 51 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

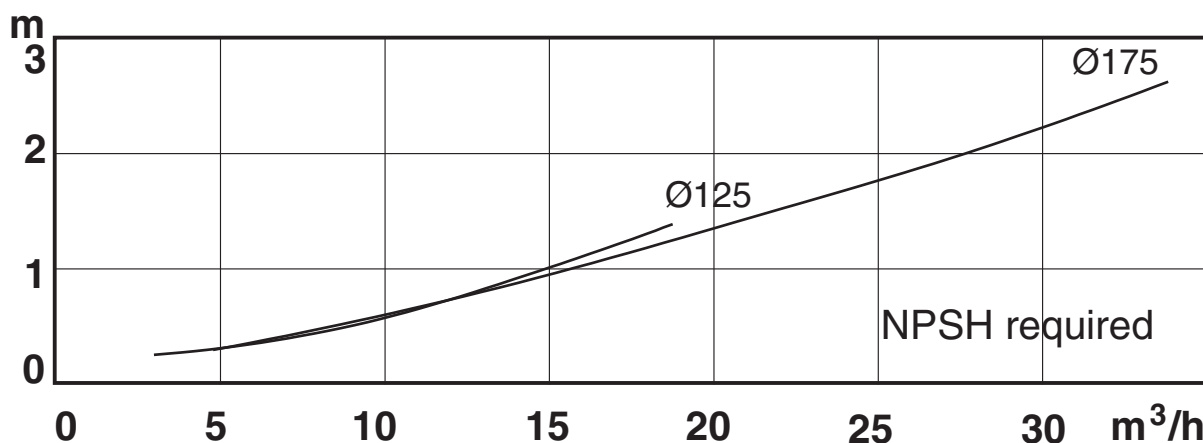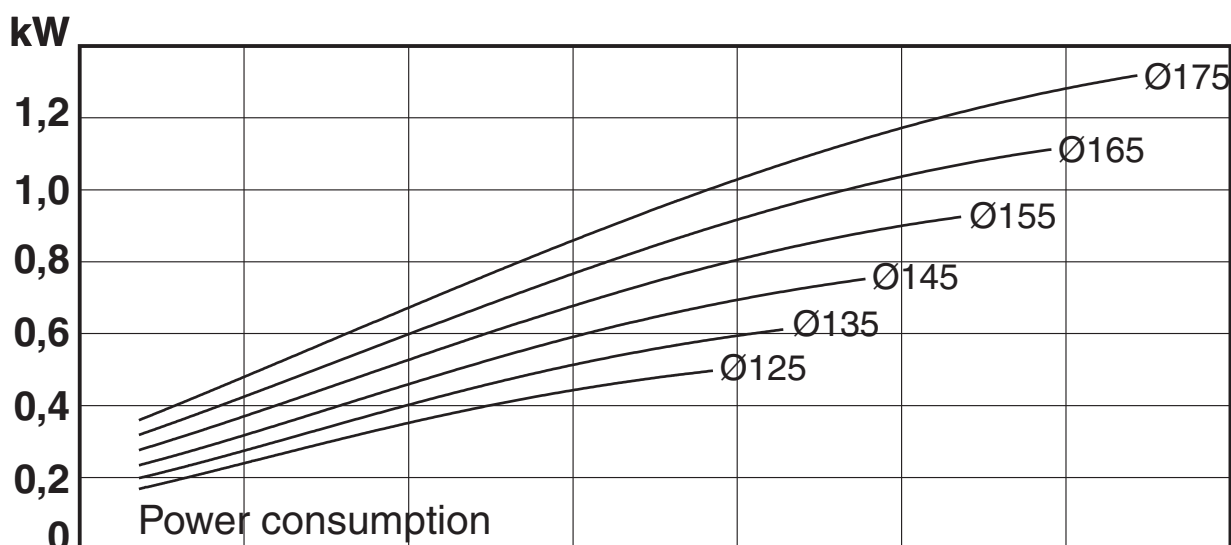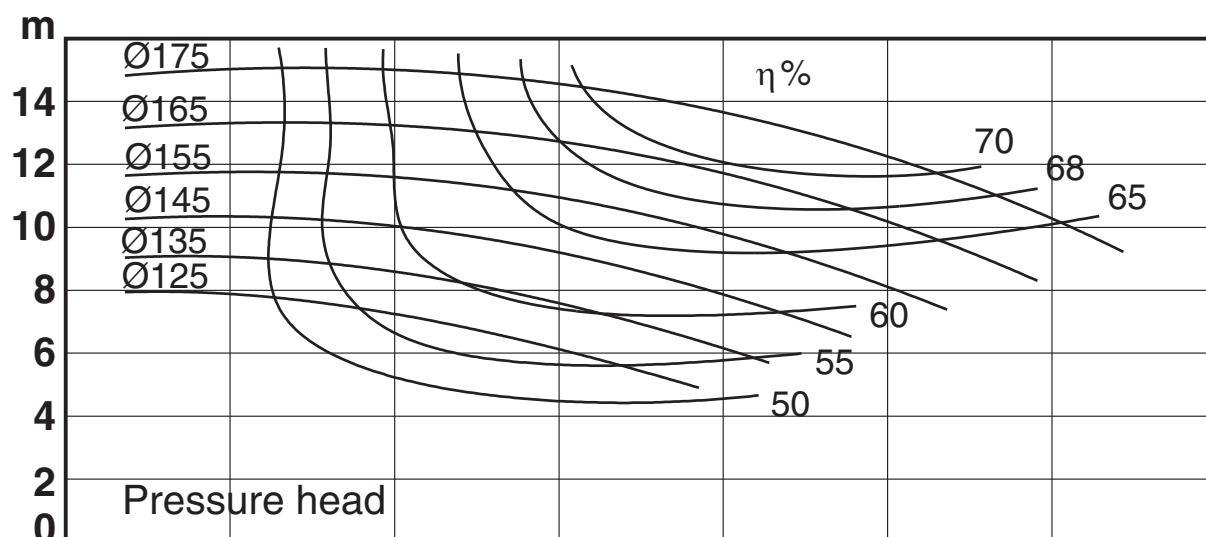

NOTE: _____

Speed: **n=3500⁻¹ 60 Hz**
Impeller: **Max. dia 175 mm**
Min. dia 125 mm
Pump inlet: **63,5 mm**
Pump outlet: **51 mm**

Performance data refer to water at 20°C
Permissible tolerance ±5%

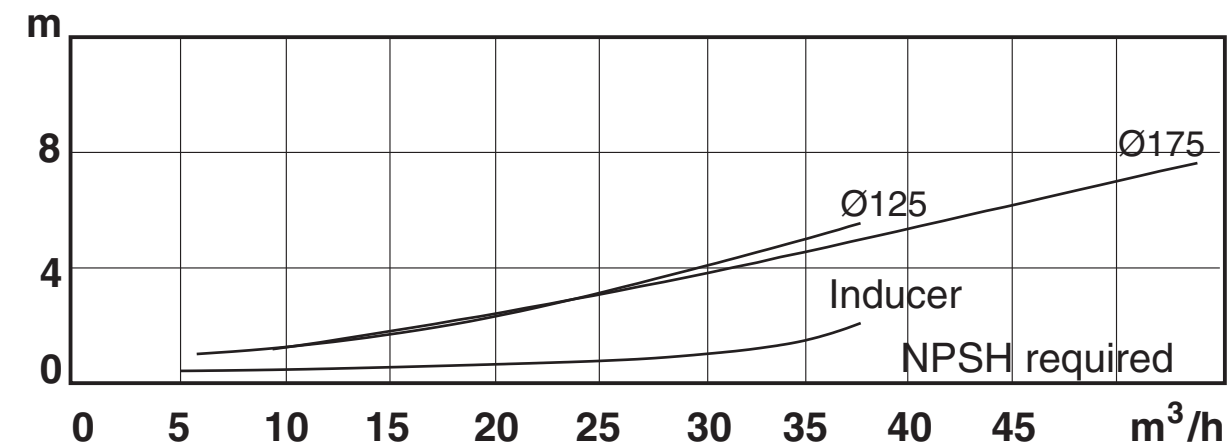
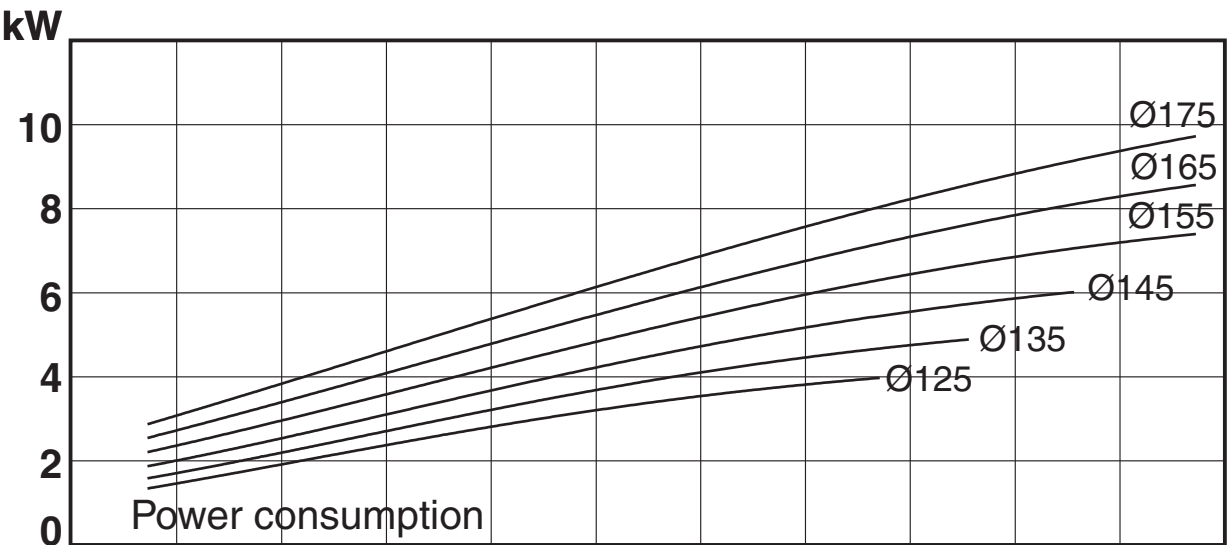
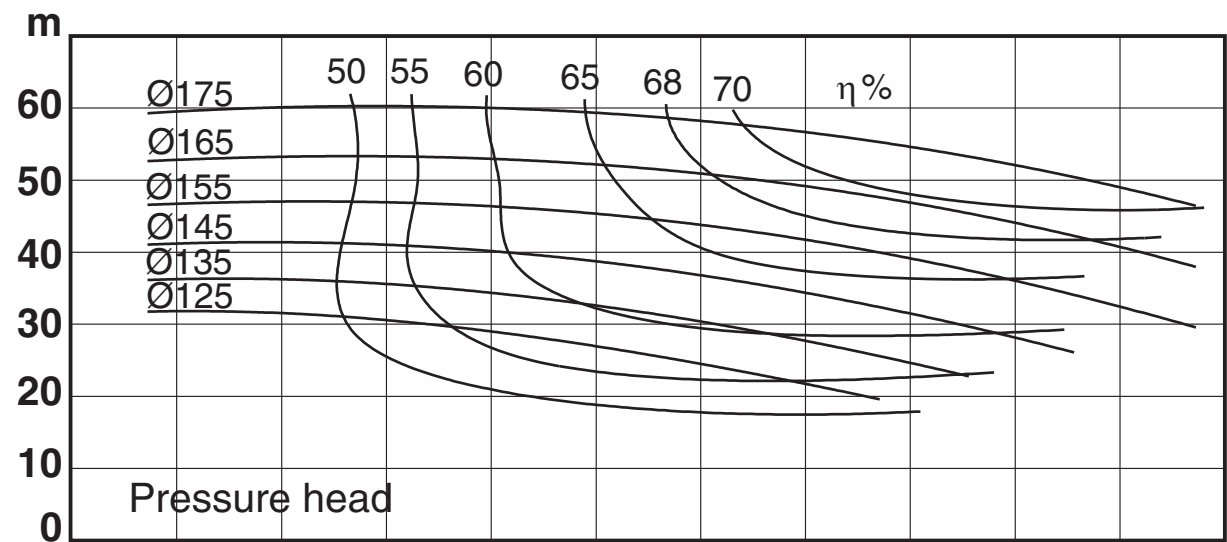


453248 ISS T 10.08

NOTE: _____

Speed: $n=1450^{-1}$ 50 Hz
 Impeller: Max. dia 180mm
 Min. dia 120mm
 Pump inlet: 76 mm
 Pump outlet: 63,5 mm

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

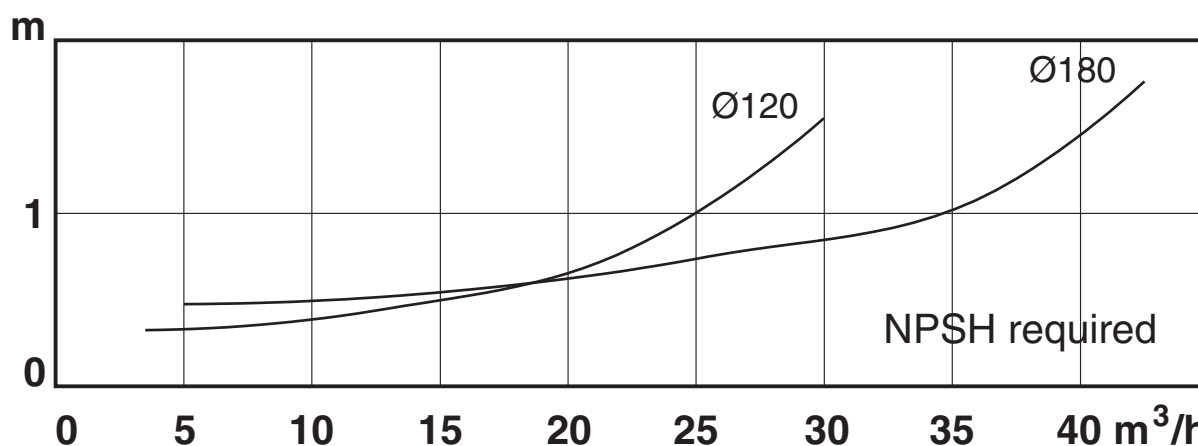
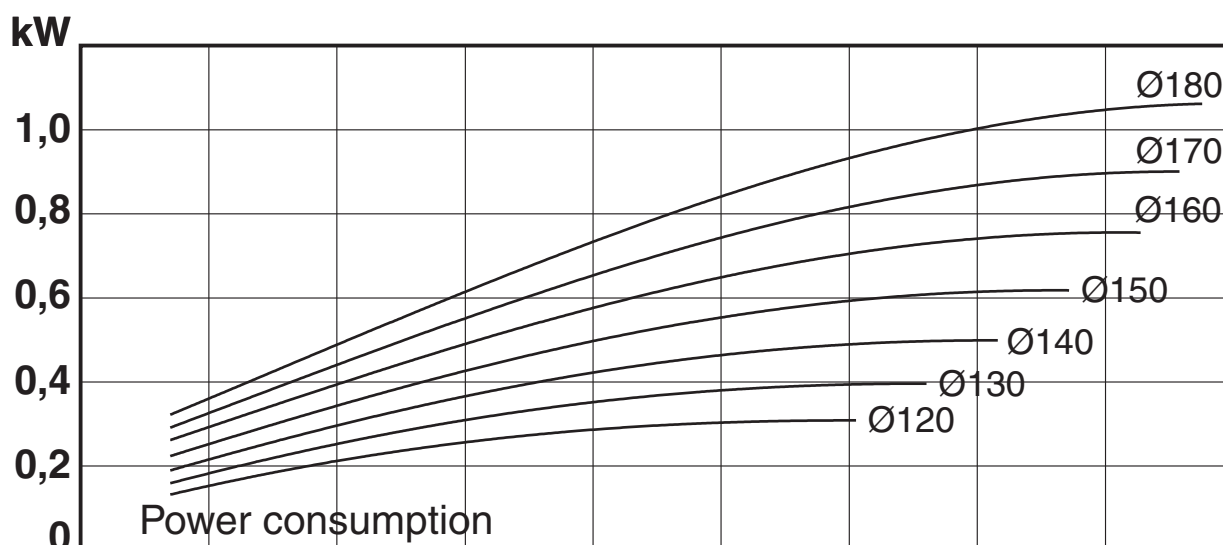
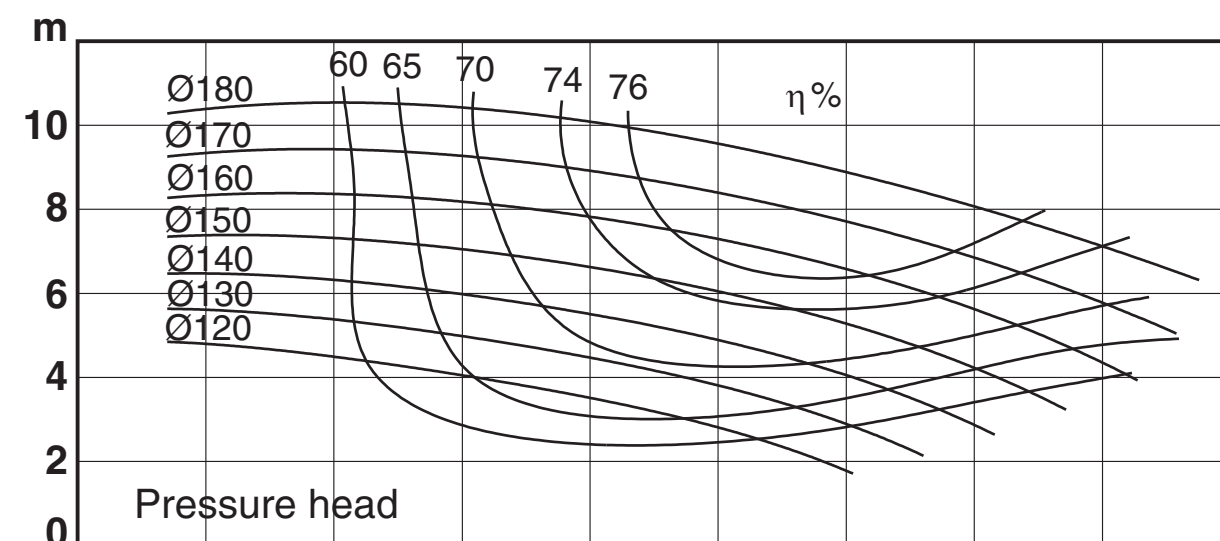


453248 ISS T 10.08

NOTE: _____

Speed: $n=2900 \text{ }^{-1}$ 50 Hz
 Impeller: Max. dia 180mm
 Min. dia 120mm
 Pump inlet: 76 mm
 Pump outlet: 63,5 mm

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

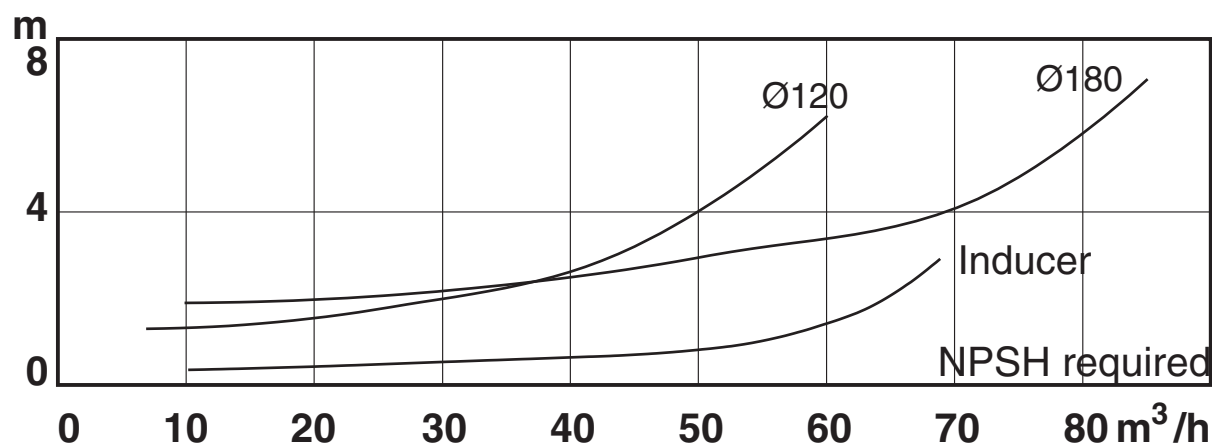
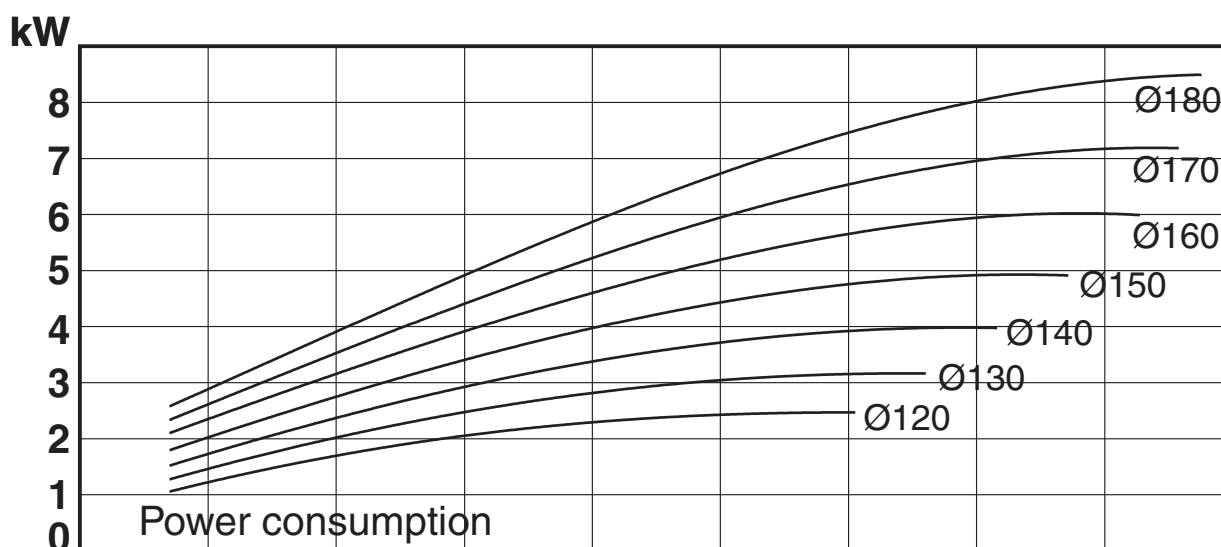
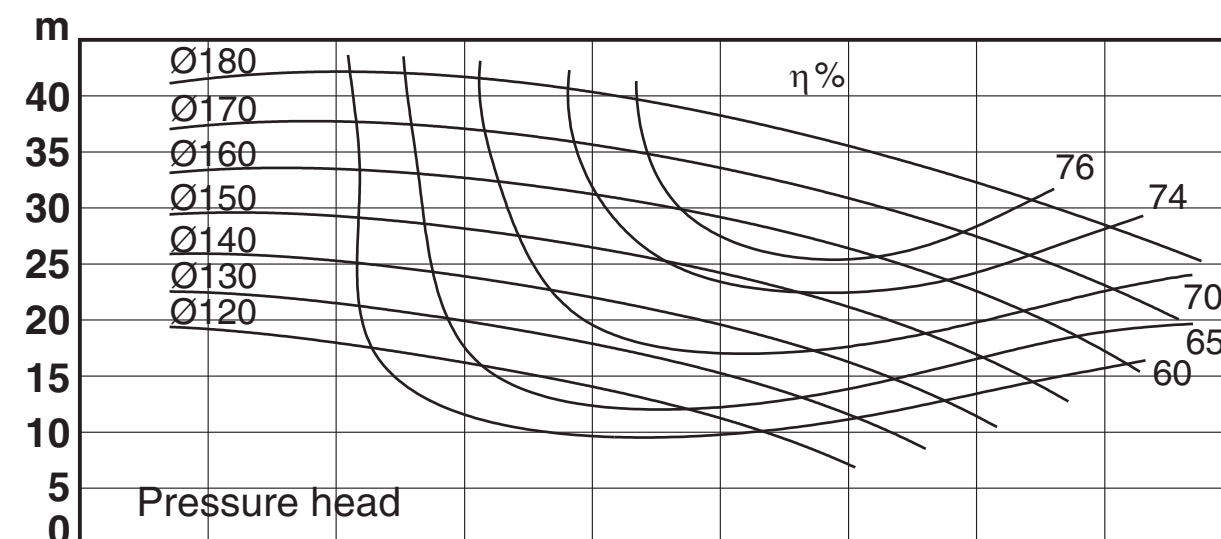


453248 ISS T 10.08

NOTE: _____

Speed: $n=1750^{-1}$ 60 Hz
 Impeller: Max. dia 180mm
 Min. dia 120mm
 Pump inlet: 76 mm
 Pump outlet: 63,5 mm

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

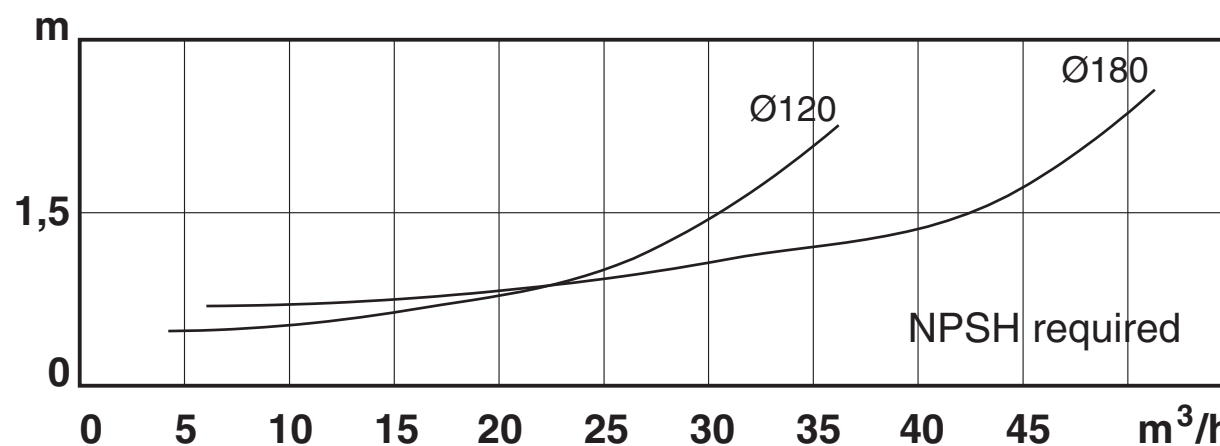
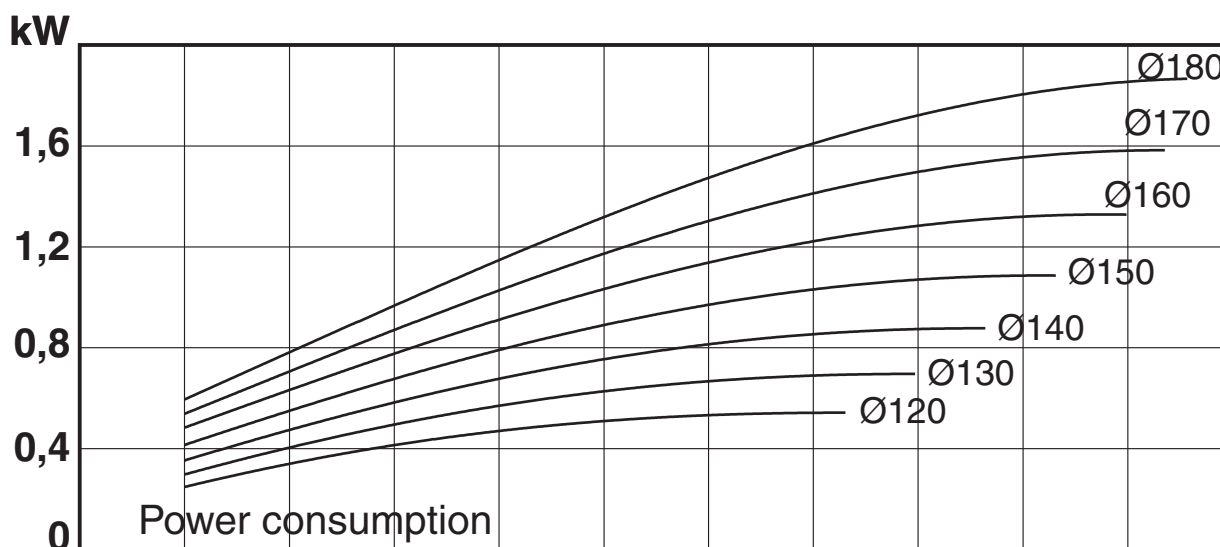
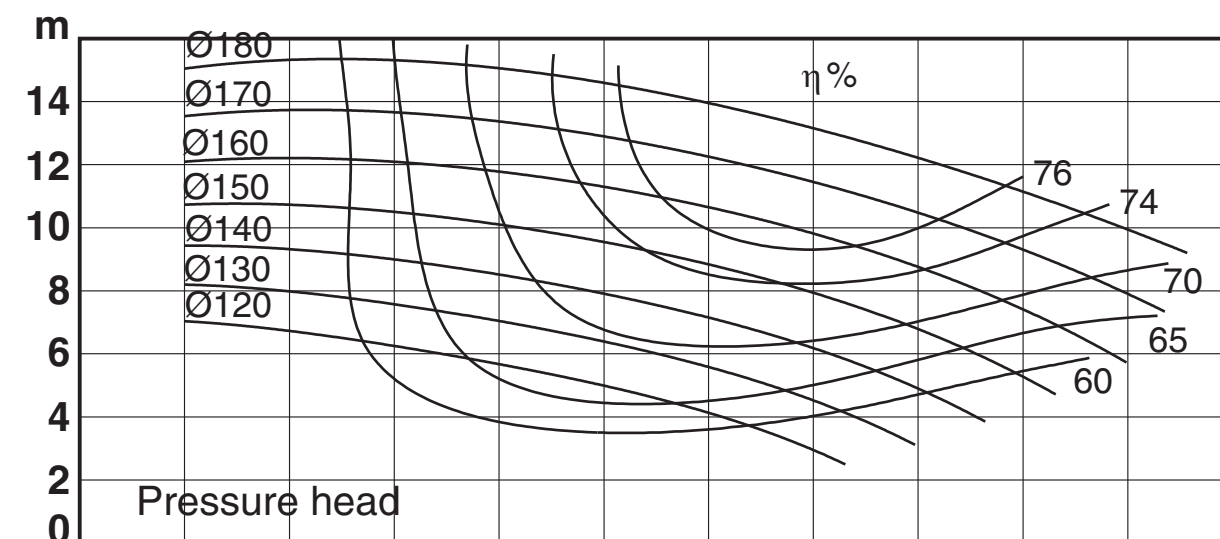


453248 ISS T 10.08

NOTE: _____

Speed: $n=3500^{-1}$ 60 Hz
Impeller: Max. dia 180mm
Min. dia 120mm
Pump inlet: 76 mm
Pump outlet: 63,5 mm




Performance data refer to water at 20°C
Permissible tolerance $\pm 5\%$

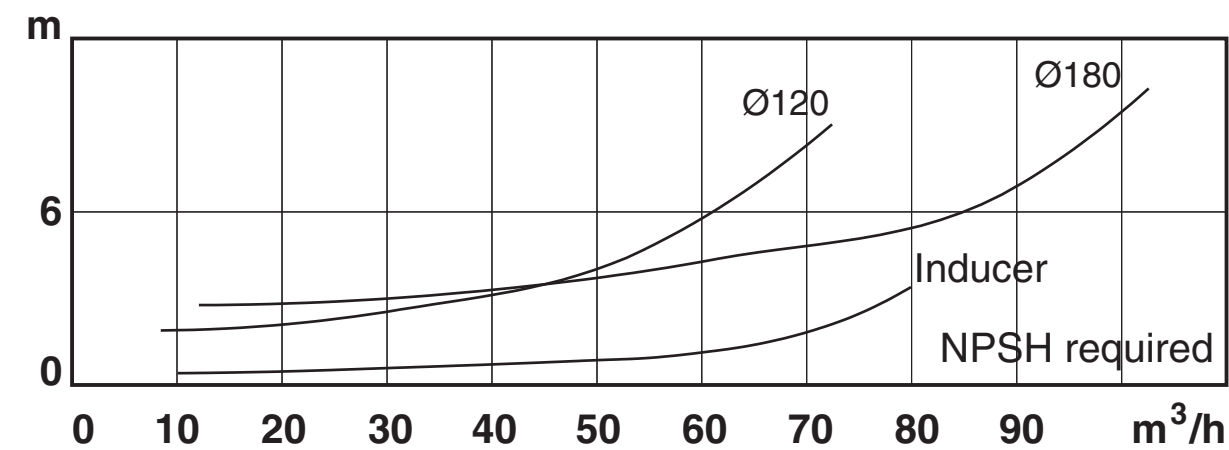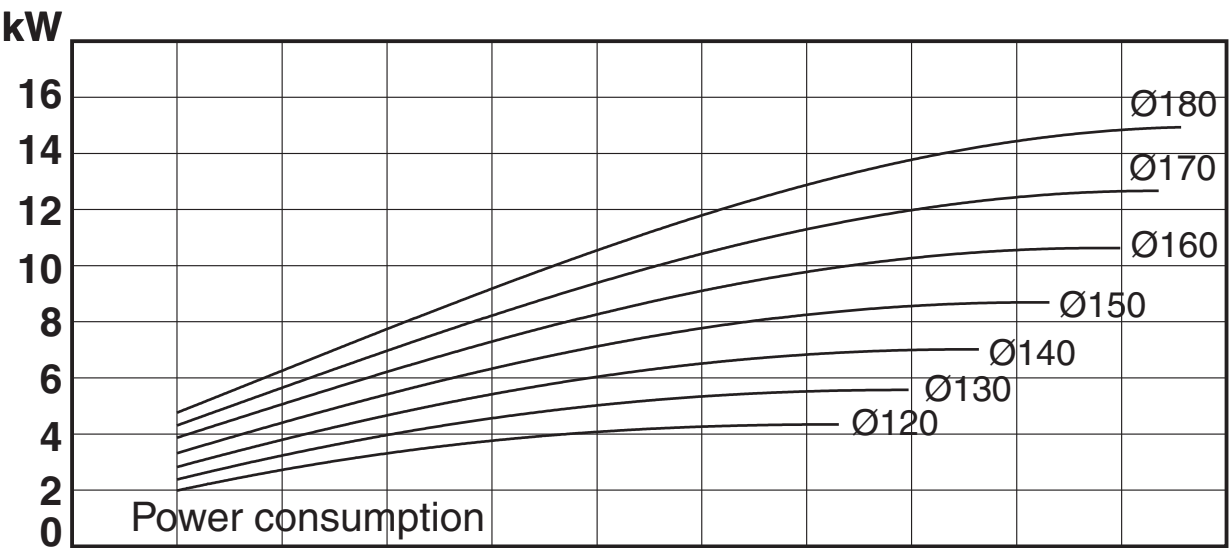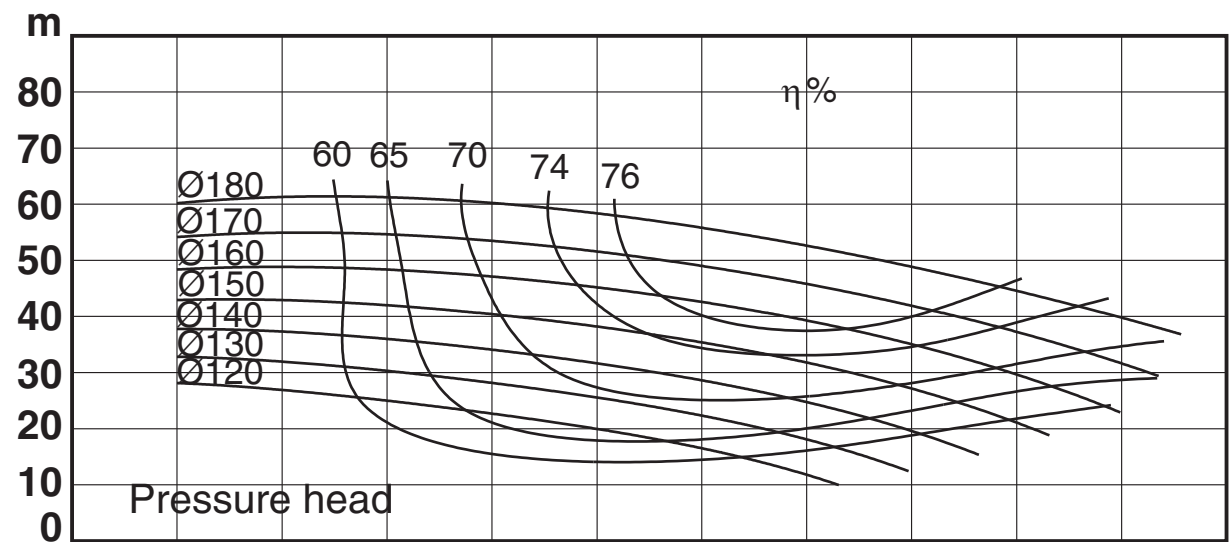

NOTE: _____

Speed: $n = 975^{-1}$ 50 Hz
Impeller: Max. dia 420 mm
Min. dia 280 mm
Pump inlet: DN250
Pump outlet: DN200




Performance data refer to water at 20°C
Permissible tolerance $\pm 5\%$

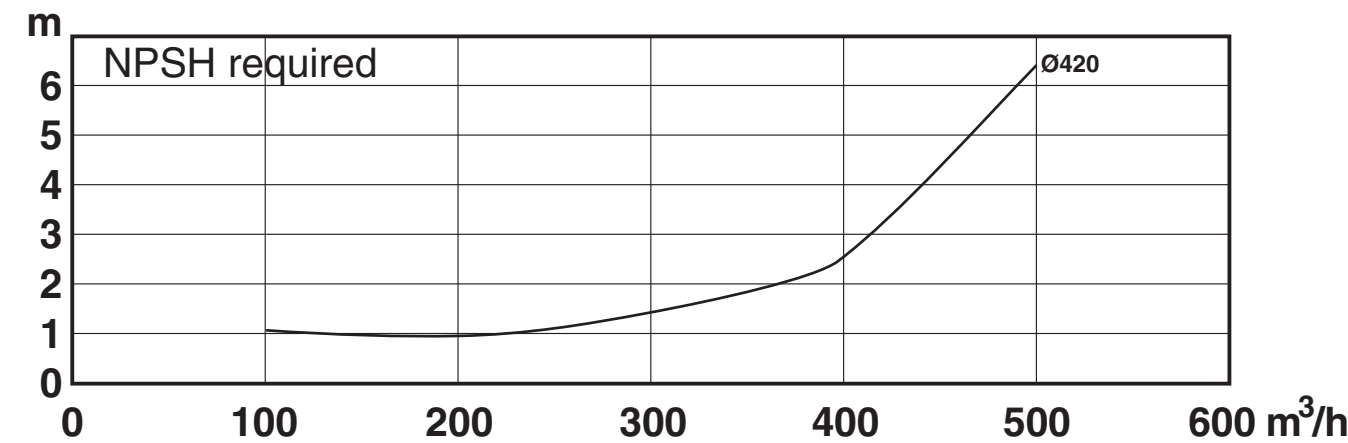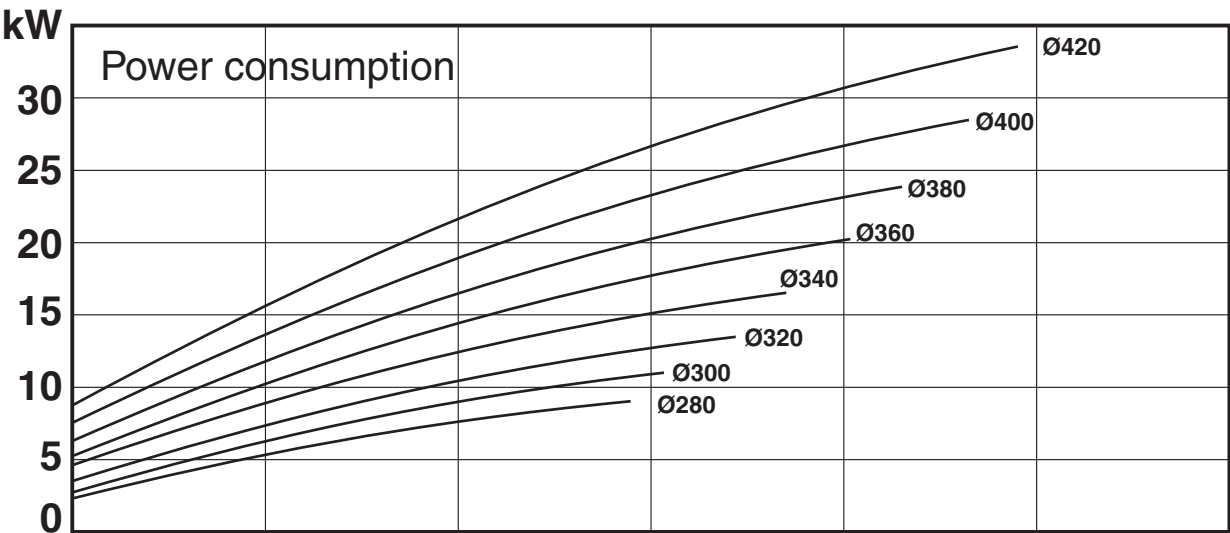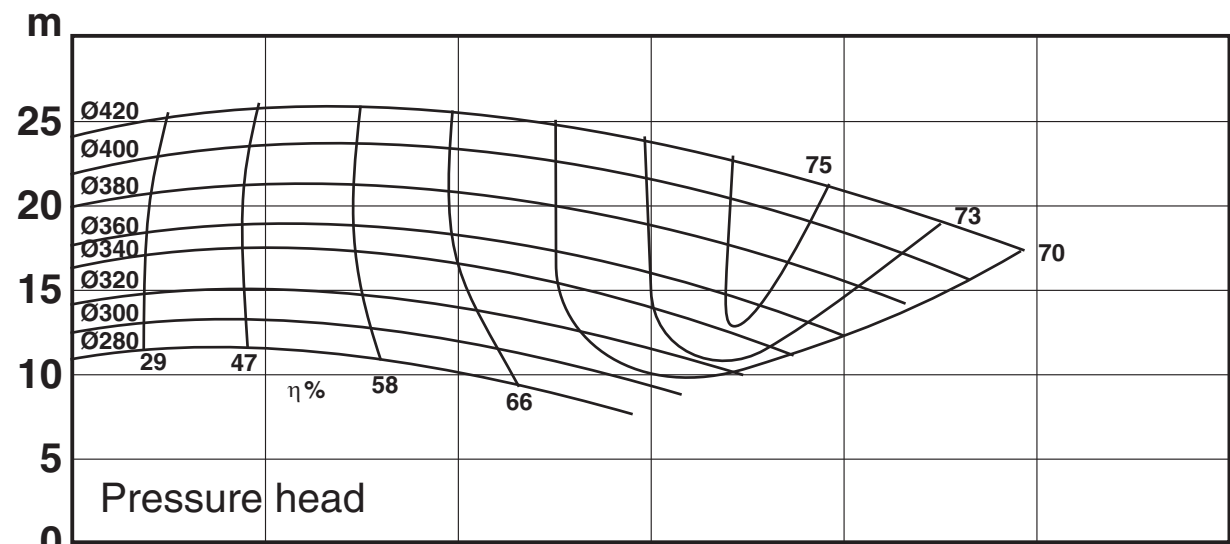

NOTE: _____

Speed: $n = 1450^{-1}$ 50 Hz
 Impeller: Max. dia 420 mm
 Min. dia 280 mm
 Pump inlet: DN250
 Pump outlet: DN200




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

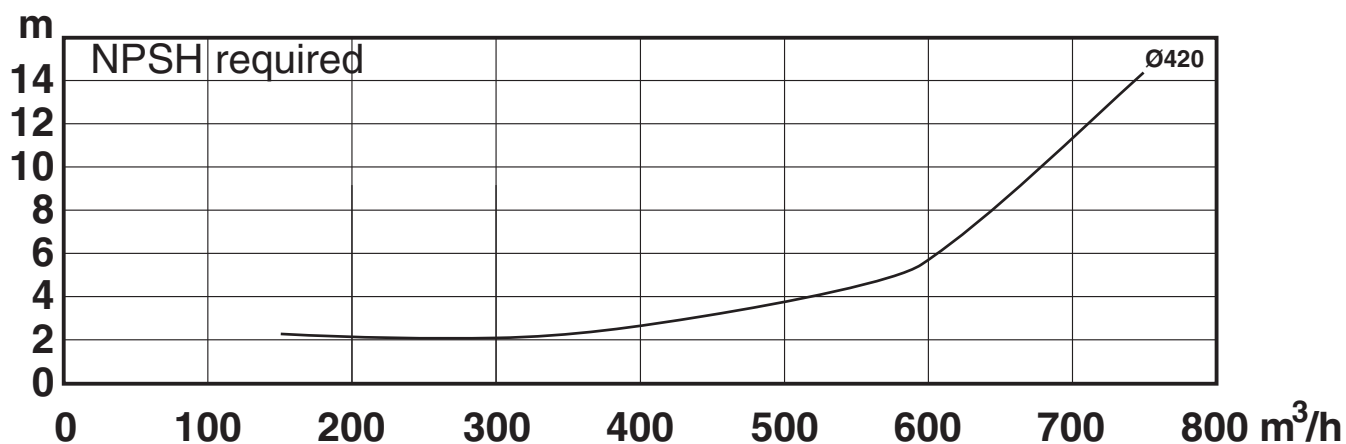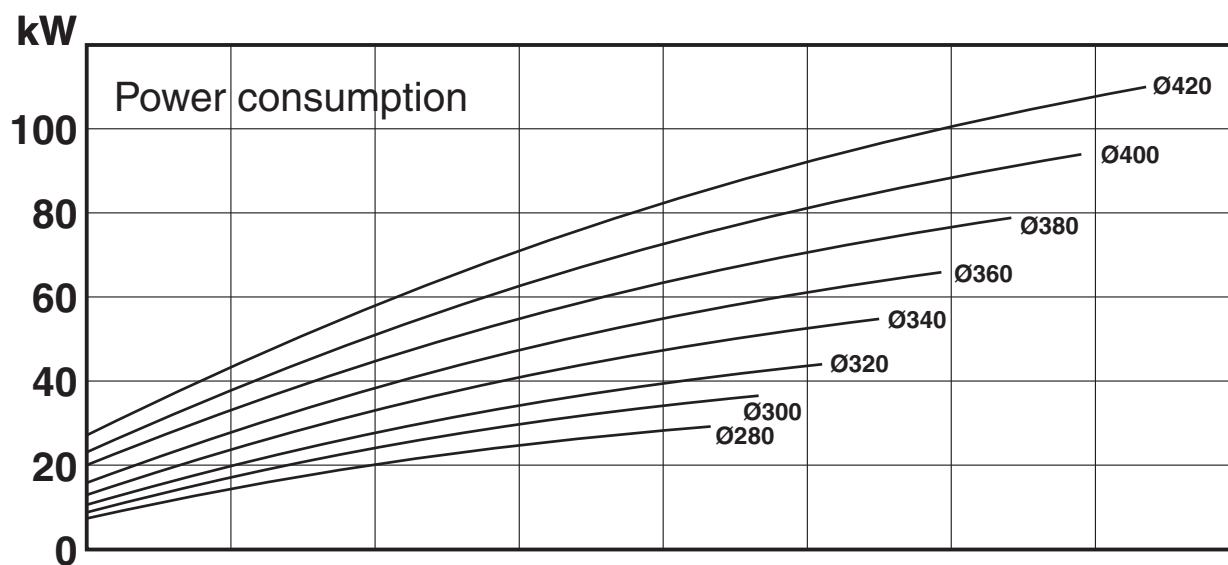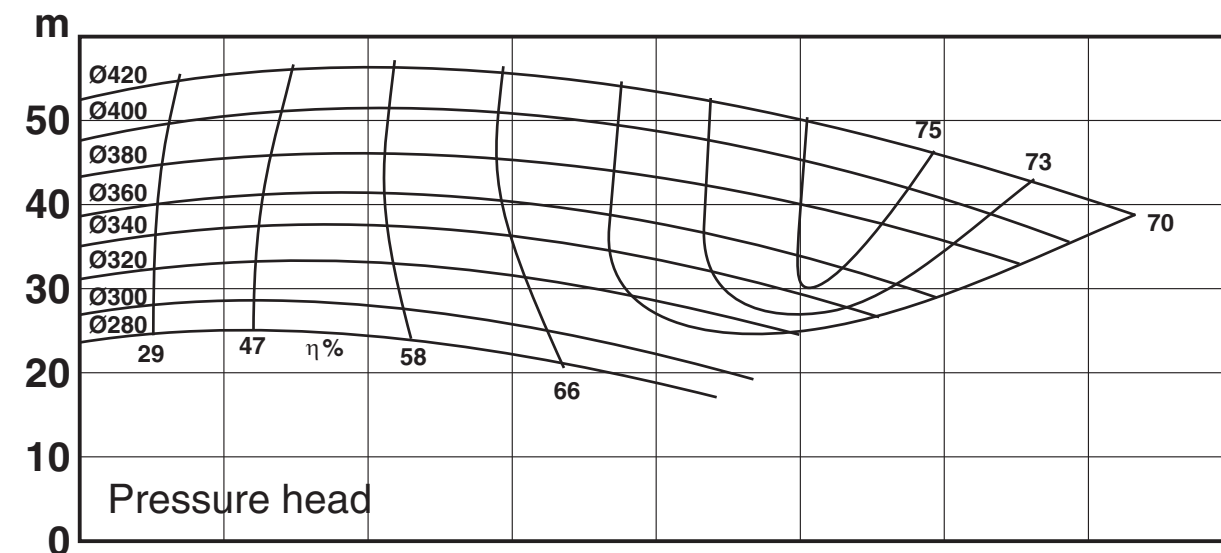

NOTE: _____

Speed: $n = 1200^{-1}$ 60 Hz
Impeller: Max. dia 420 mm
Min. dia 280 mm
Pump inlet: DN250
Pump outlet: DN200




Performance data refer to water at 20°C
Permissible tolerance $\pm 5\%$

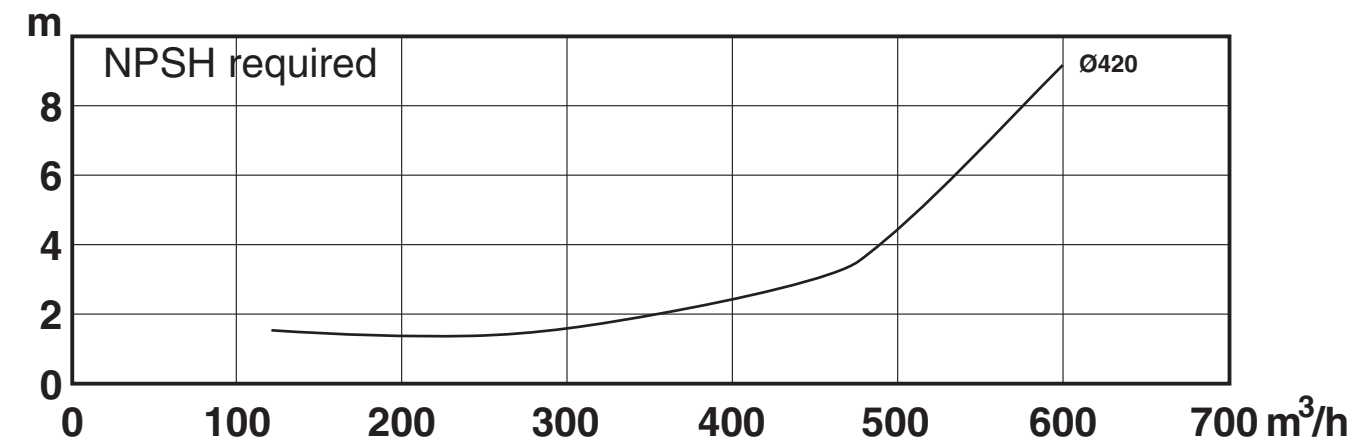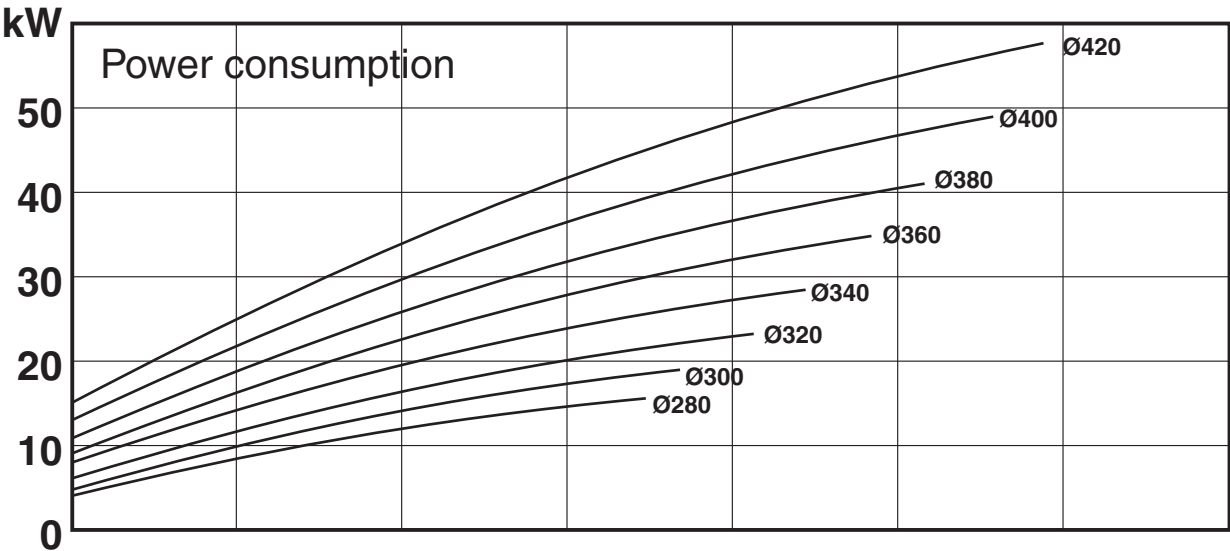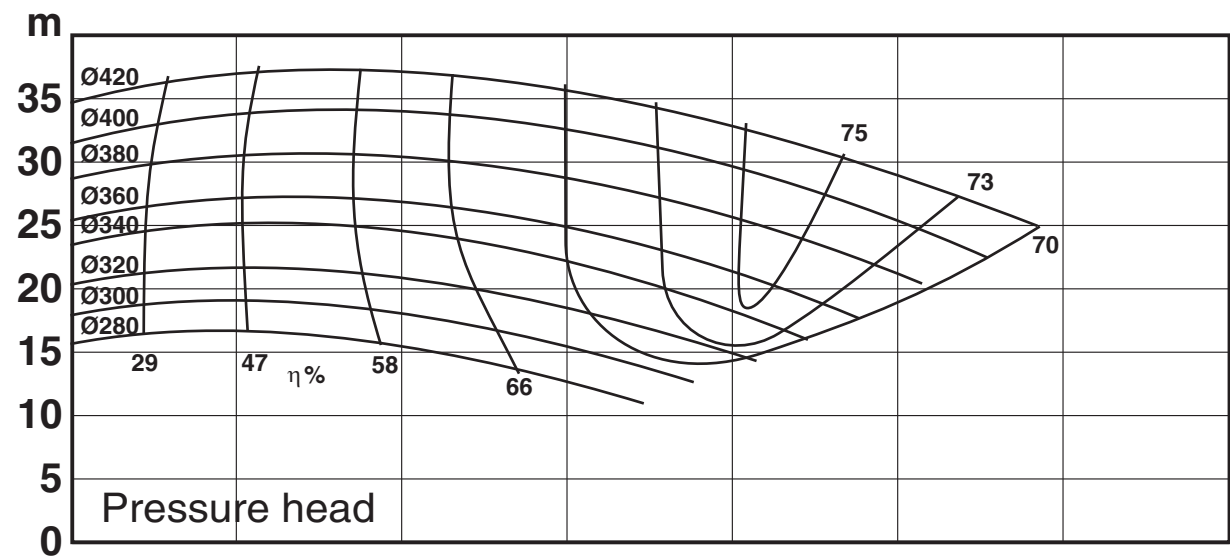

NOTE: _____

Speed: $n = 1750^{-1}$ 60 Hz
 Impeller: Max. dia 420 mm
 Min. dia 280 mm
 Pump inlet: DN250
 Pump outlet: DN200




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

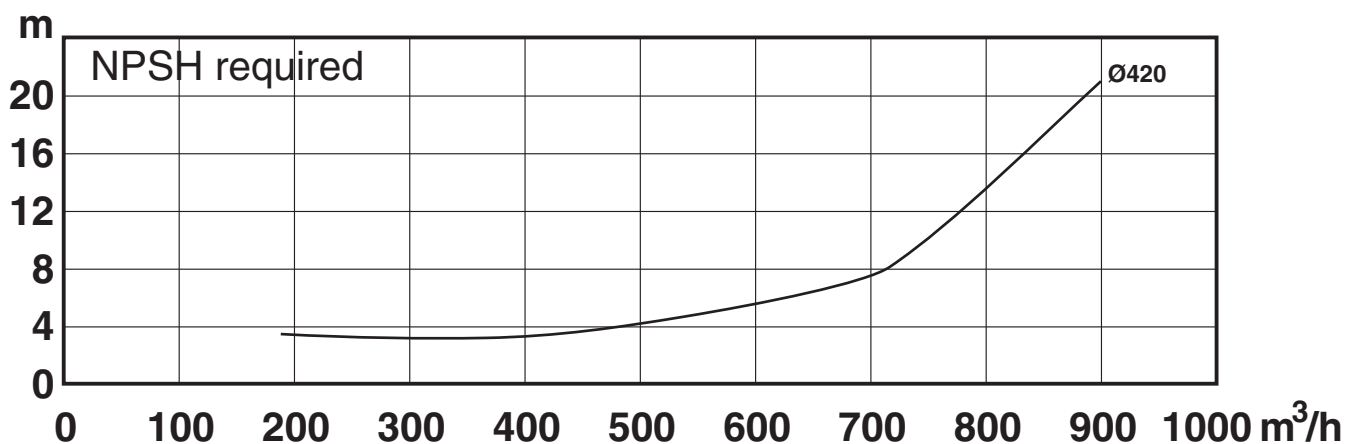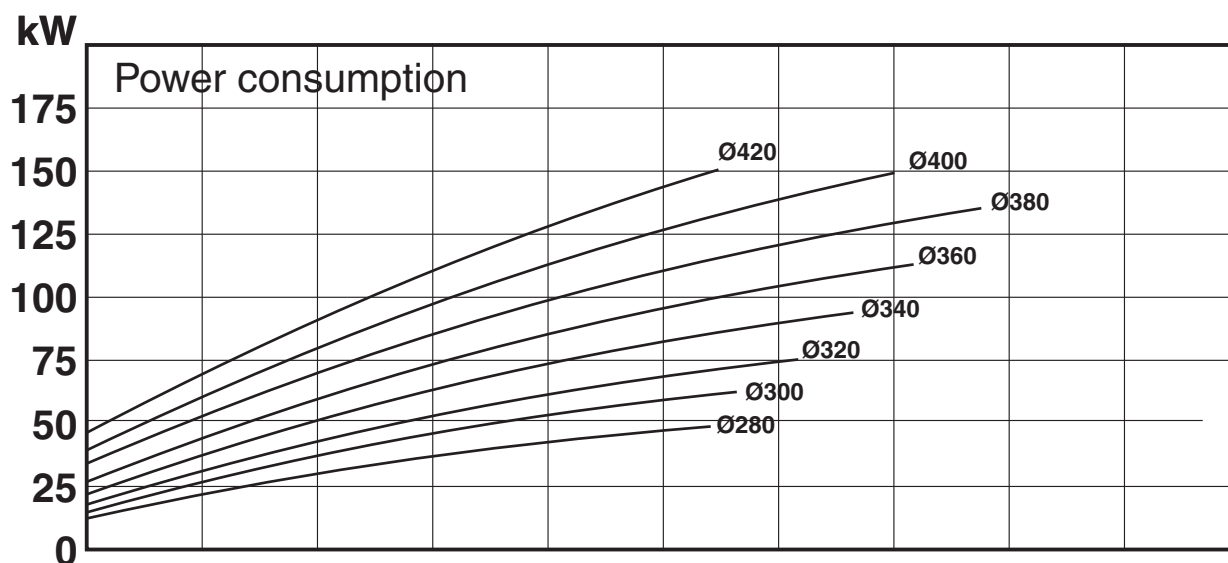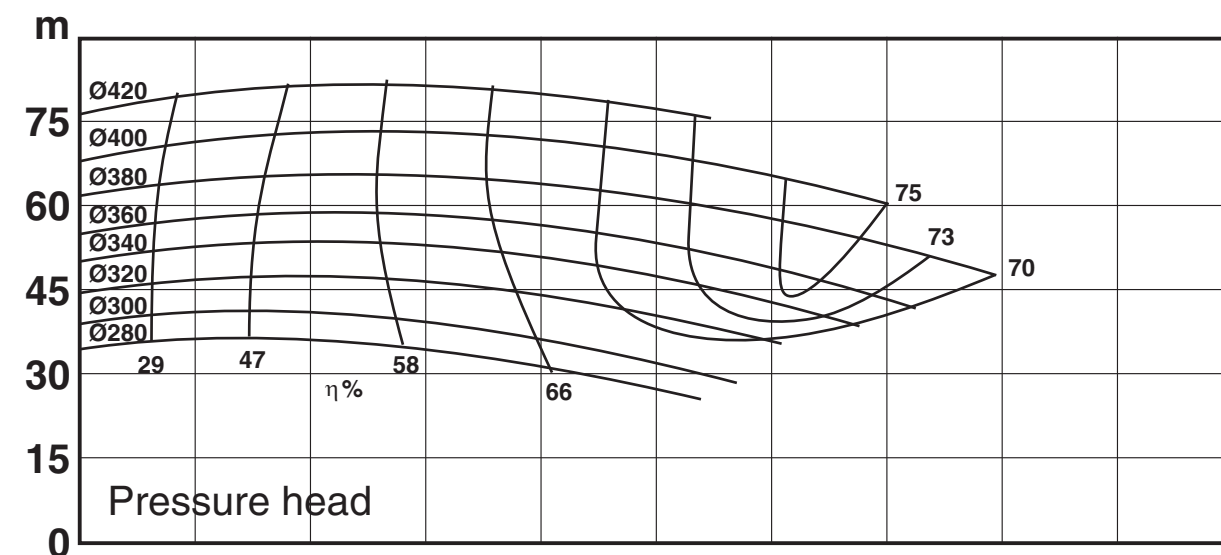

NOTE: _____

Speed: $n=1450^{-1}$ 50 Hz
 Impeller: Max. dia 210 mm
 Min. dia 160 mm
 Pump inlet: 63,5 mm
 Pump outlet: 38 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

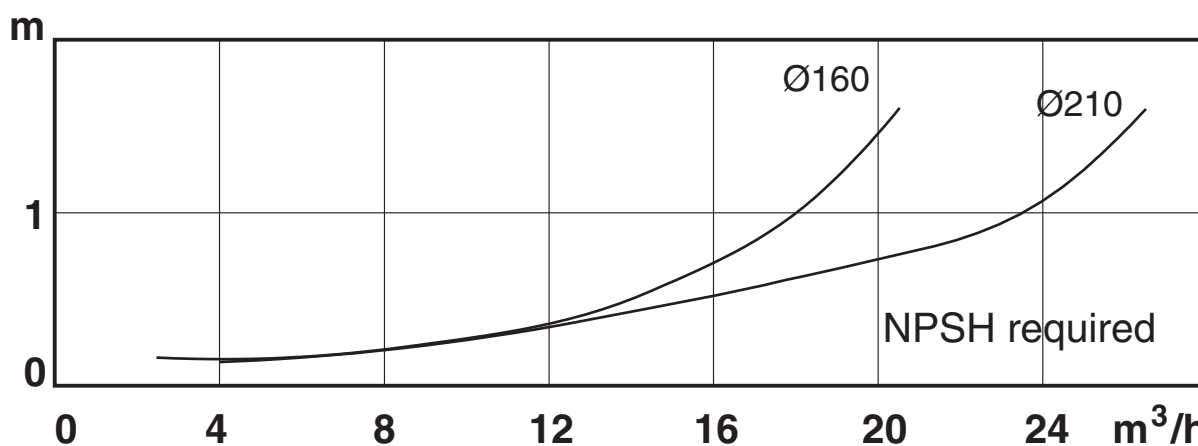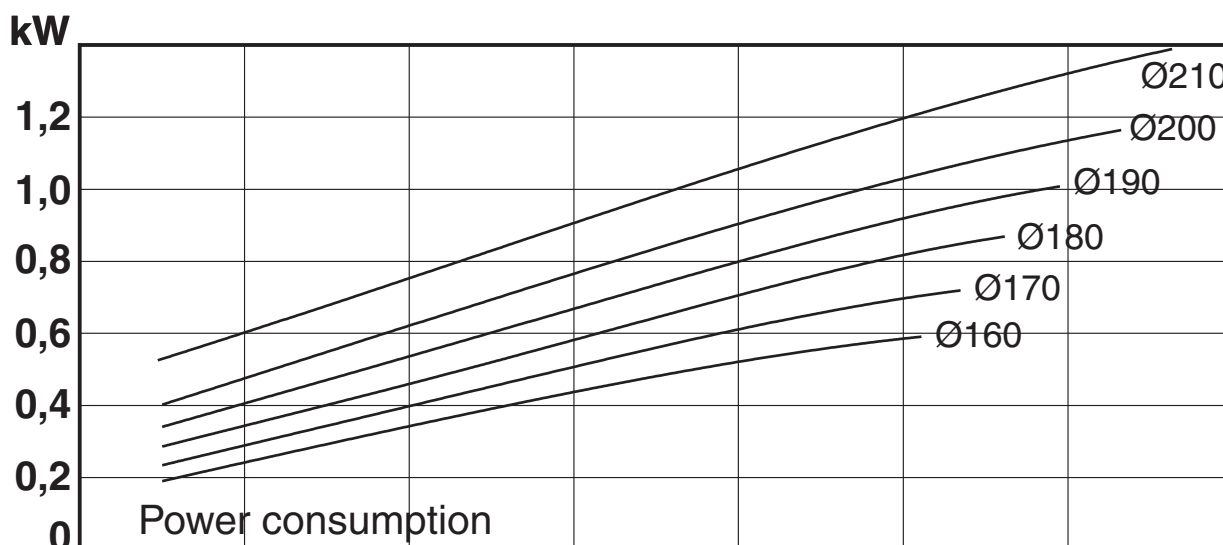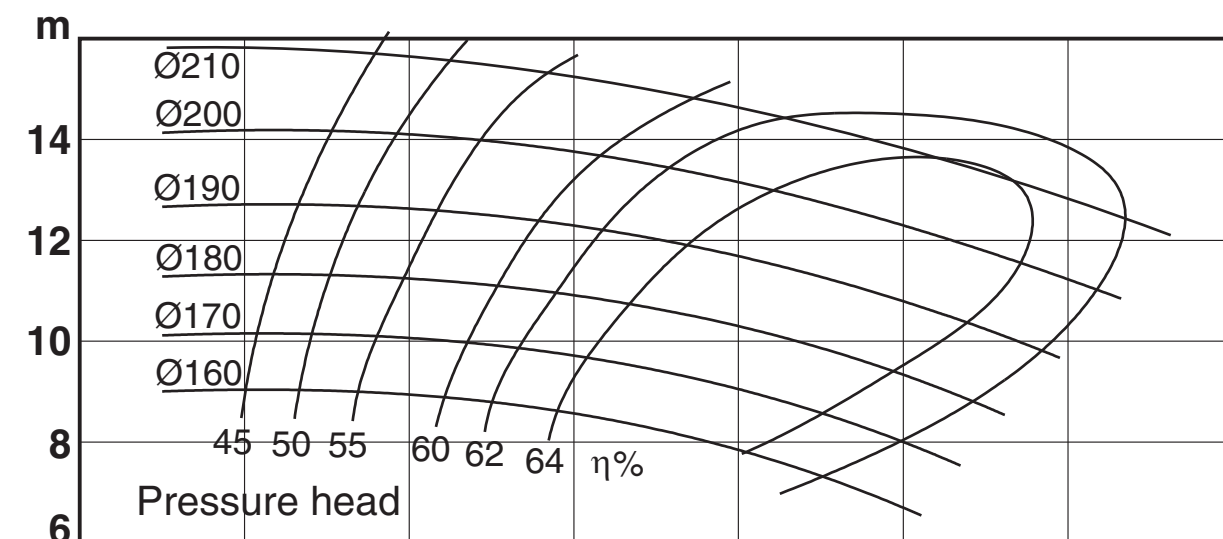

NOTE: _____

Speed: $n=2900 \text{ }^{-1}$ 50 Hz
 Impeller: Max. dia 210 mm
 Min. dia 160 mm
 Pump inlet: 63,5 mm
 Pump outlet: 38 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

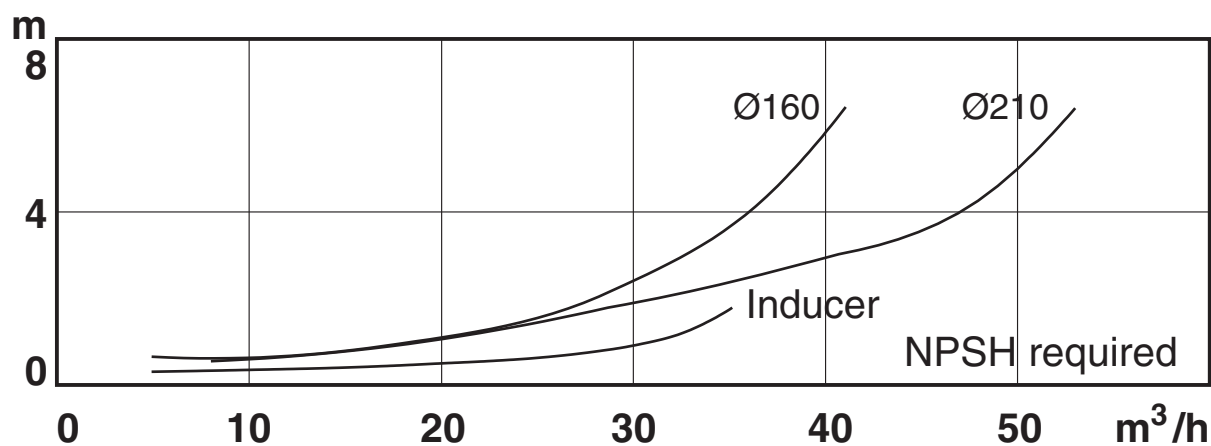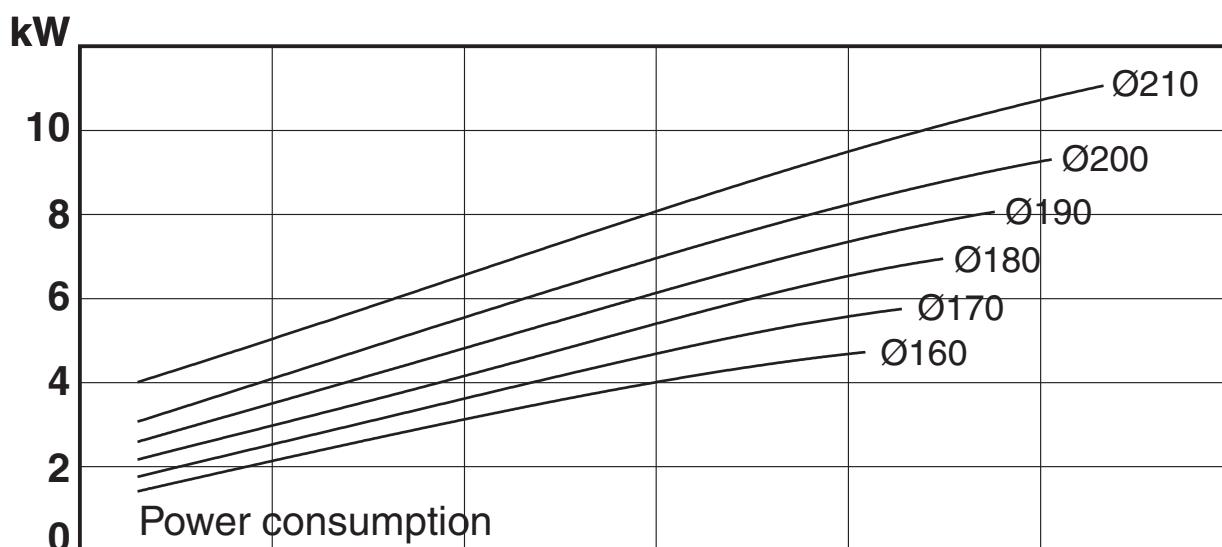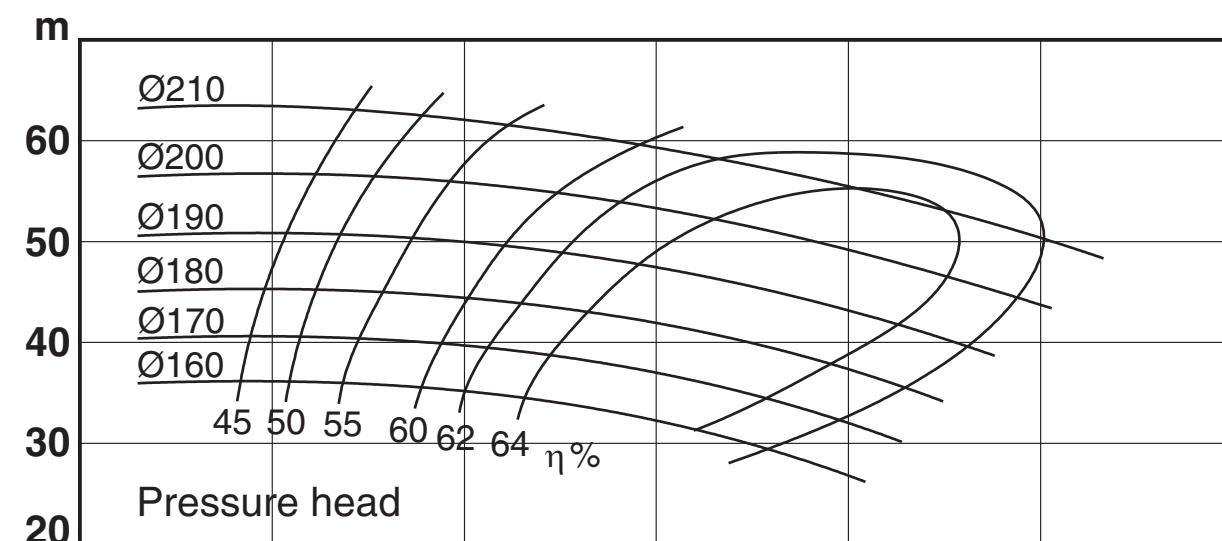

NOTE: _____

Speed: **$n=1750^{-1}$ 60 Hz**
 Impeller: **Max. dia 210 mm**
Min. dia 160 mm
 Pump inlet: **63,5 mm**
 Pump outlet: **38 mm**

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

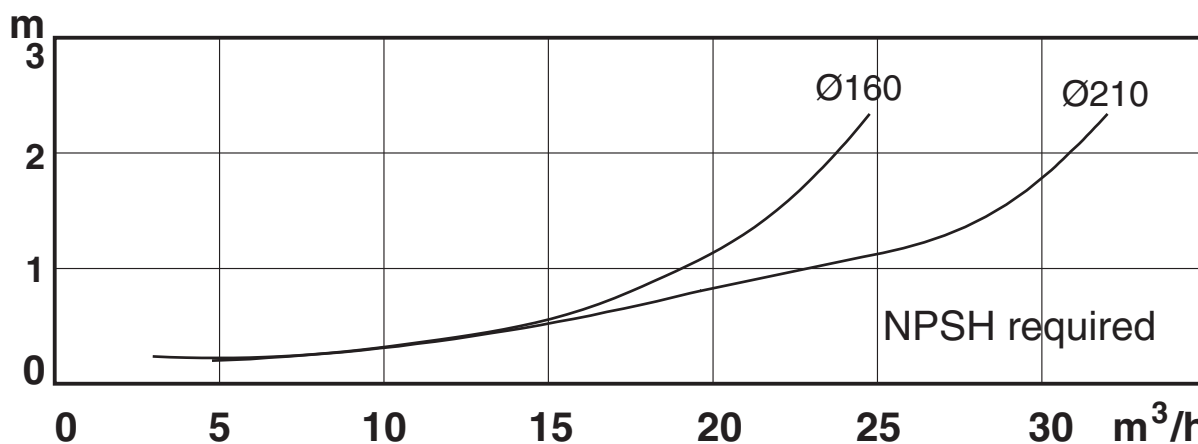
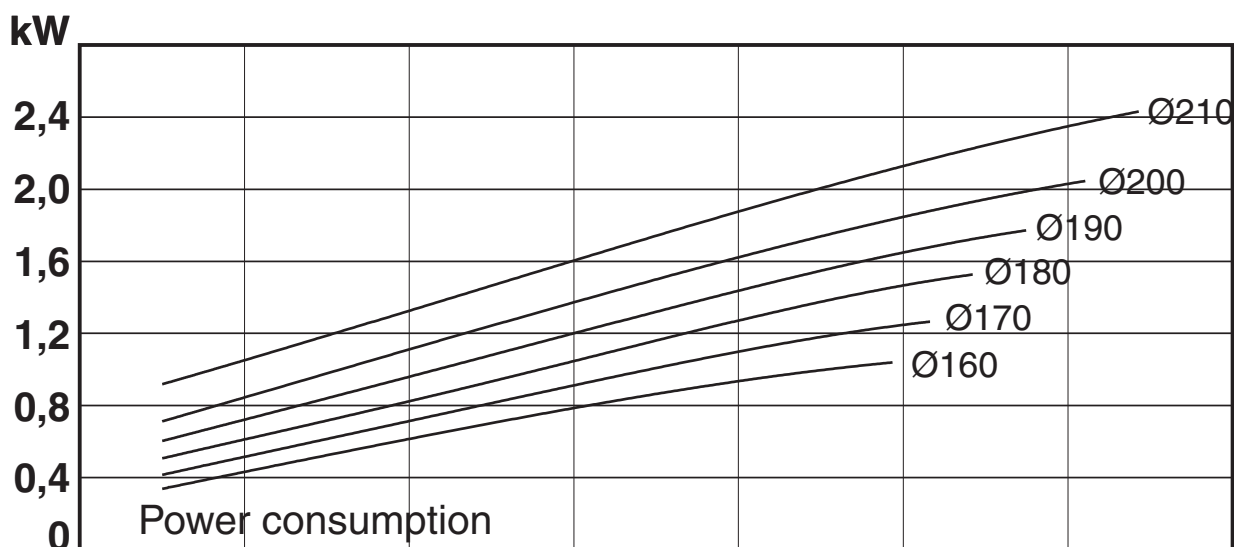
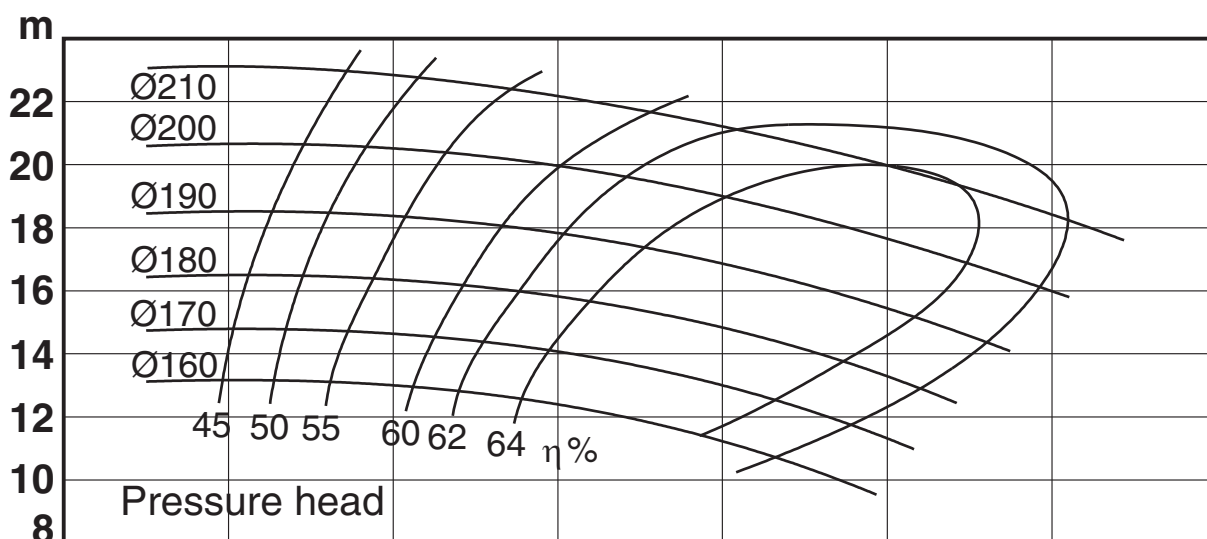


453250 ISS T 10.08

NOTE: _____

Speed: **n=3500⁻¹ 60 Hz**
Impeller: **Max. dia 210 mm**
Min. dia 160 mm
Pump inlet: **63,5 mm**
Pump outlet: **38 mm**




Performance data refer to water at 20°C
Permissible tolerance ±5%

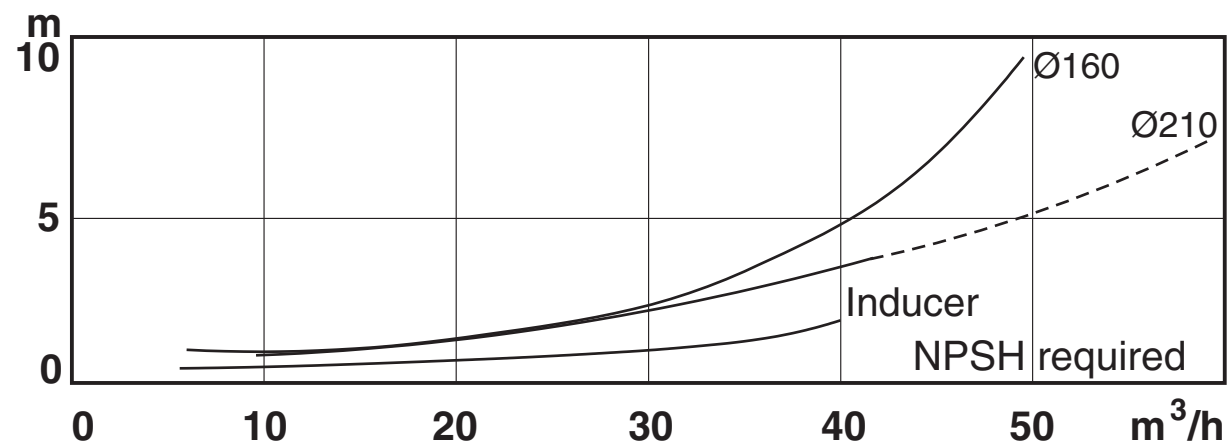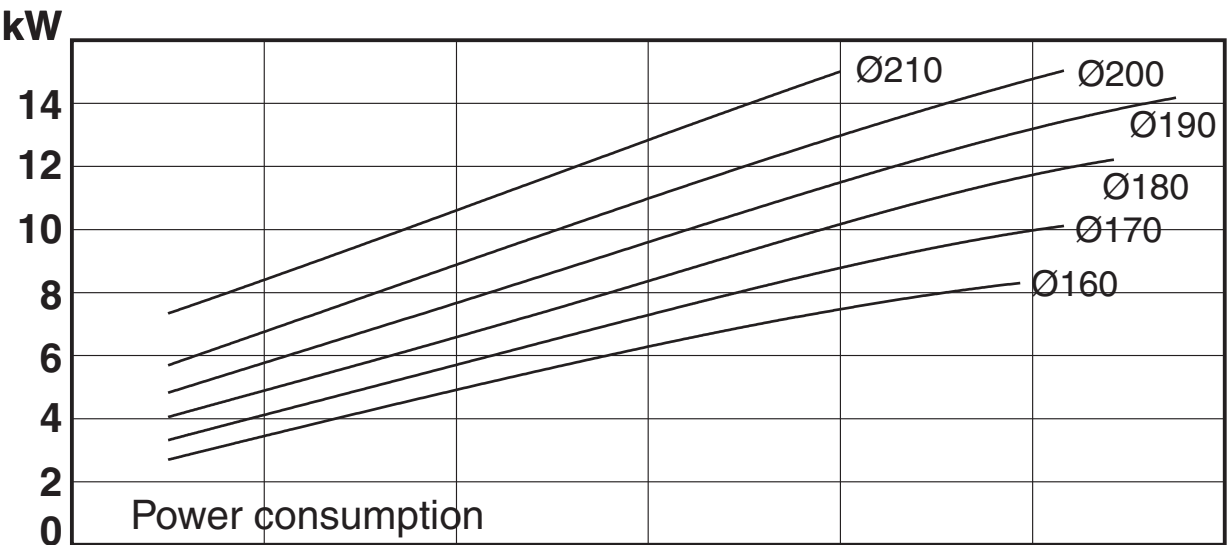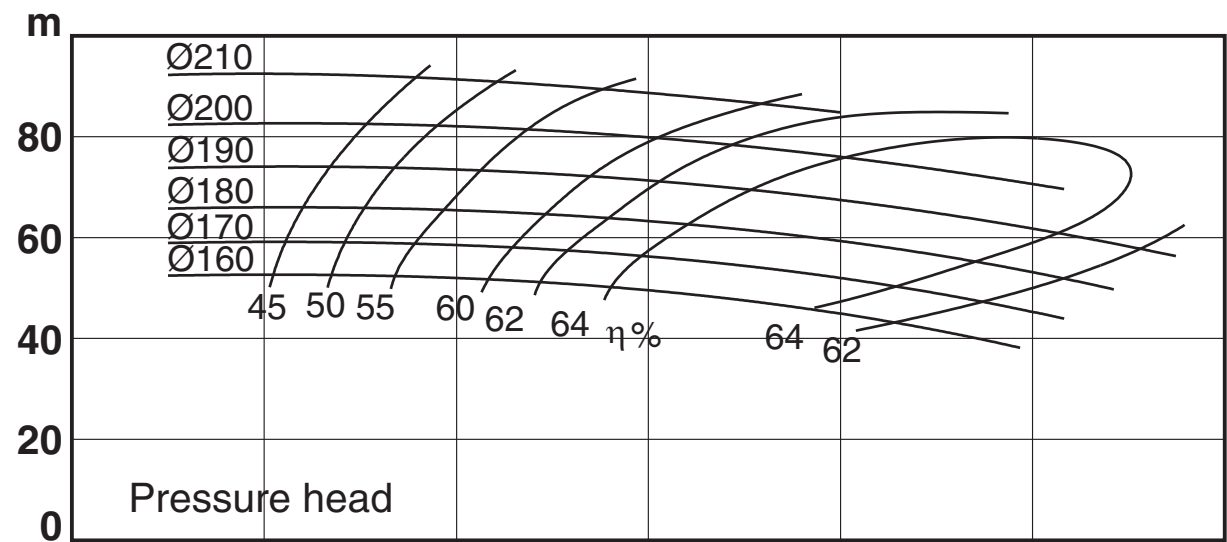

NOTE: _____

Speed: $n=1450^{-1}$ 50 Hz
 Impeller: Max. dia 220 mm
 Min. dia 160 mm
 Pump inlet: 76 mm
 Pump outlet: 51 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

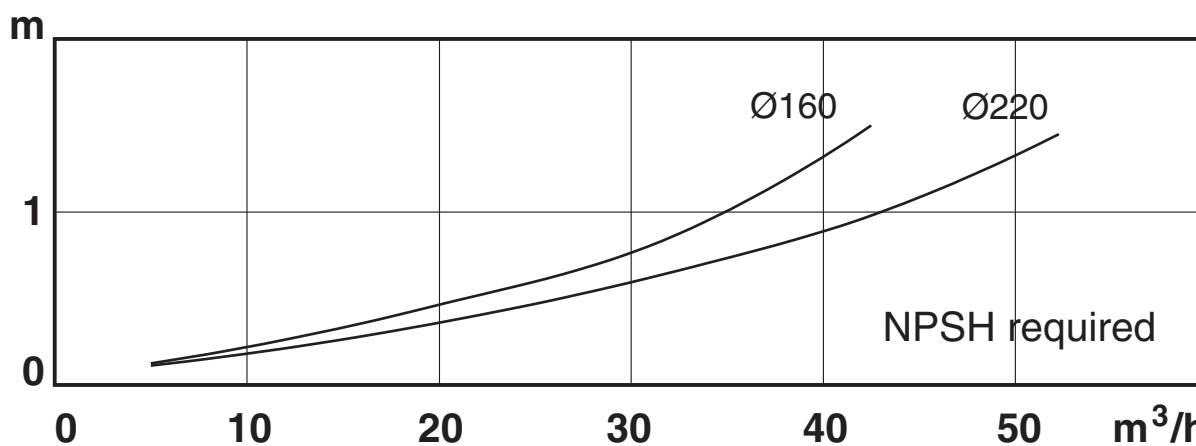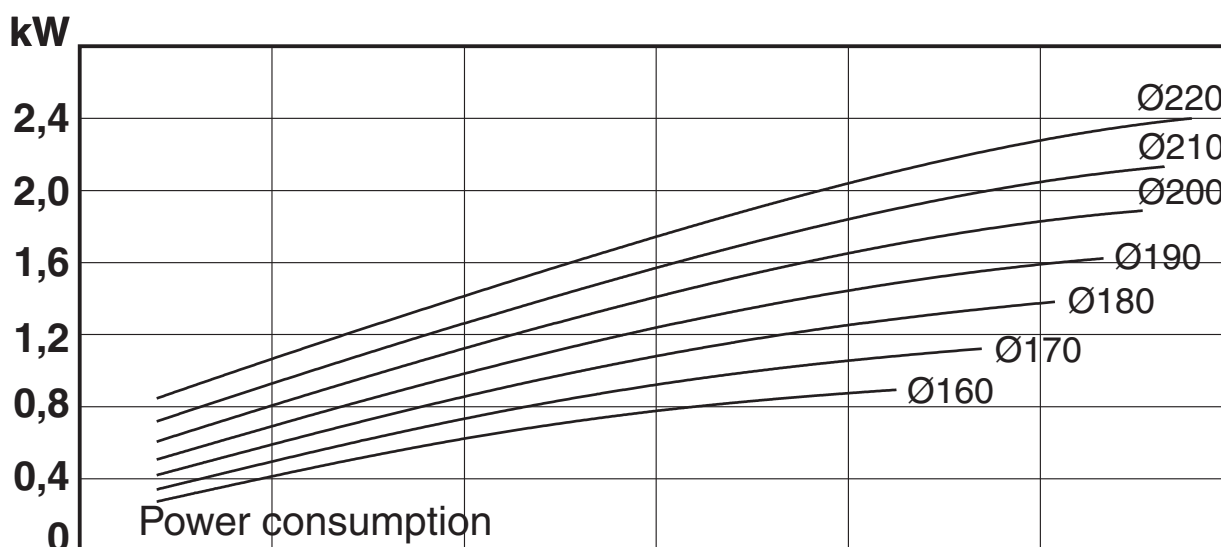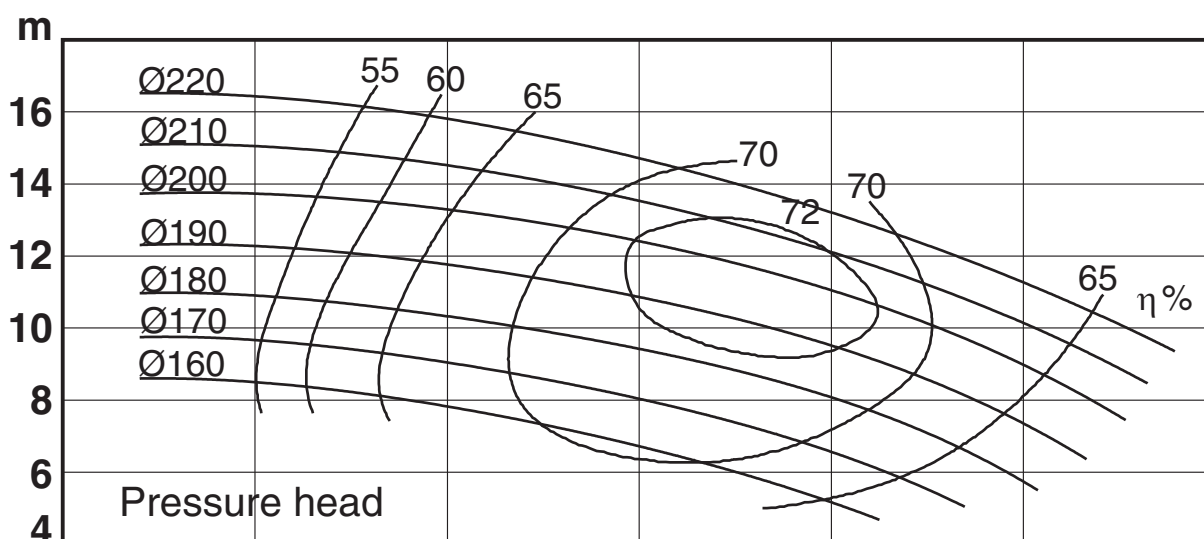

NOTE: _____

Speed: $n=2900 \text{ }^{-1}$ 50 Hz
 Impeller: Max. dia 220 mm
 Min. dia 160 mm
 Pump inlet: 76 mm
 Pump outlet: 51 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

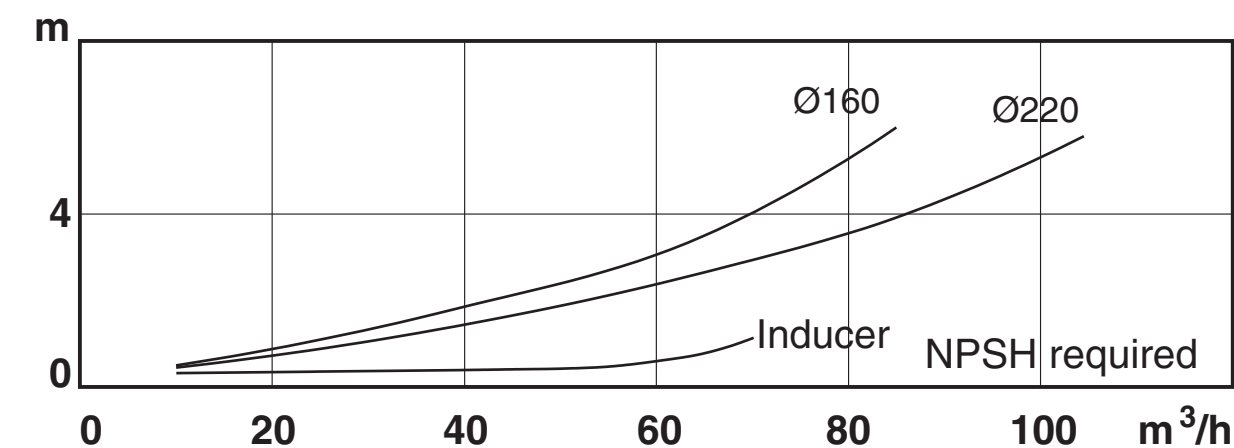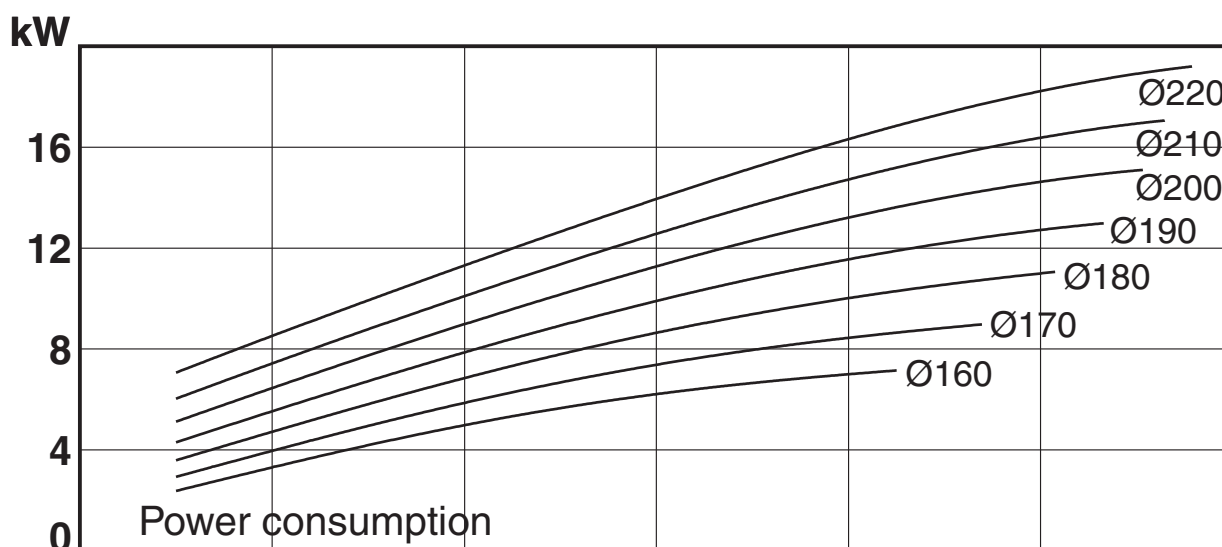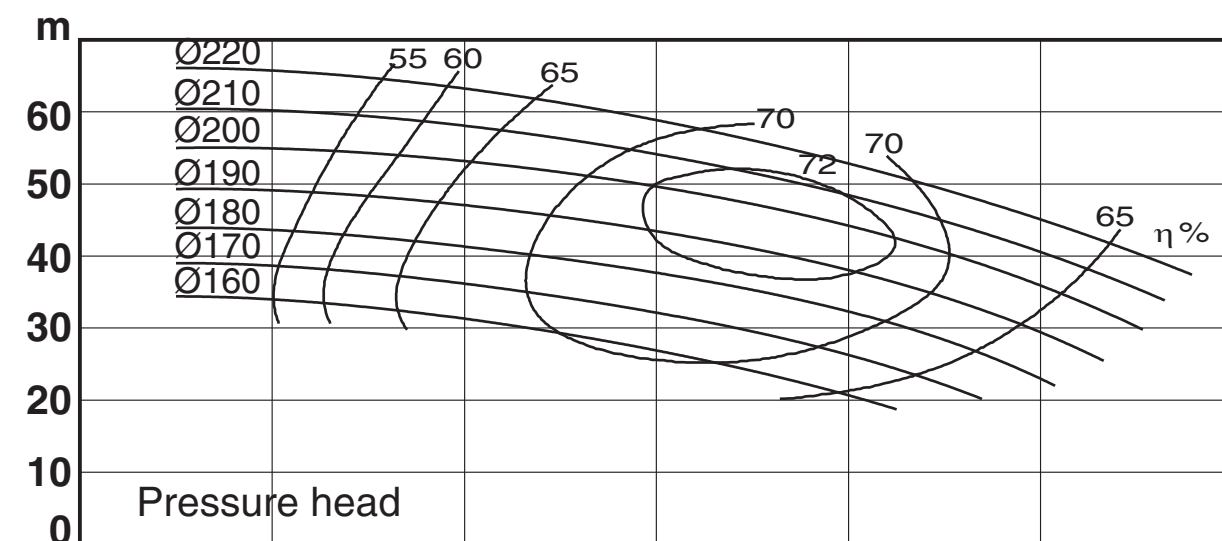

NOTE: _____

Speed: **$n=1750^{-1}$ 60 Hz**
 Impeller: **Max. dia 220 mm**
Min. dia 160 mm
 Pump inlet: **76 mm**
 Pump outlet: **51 mm**




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

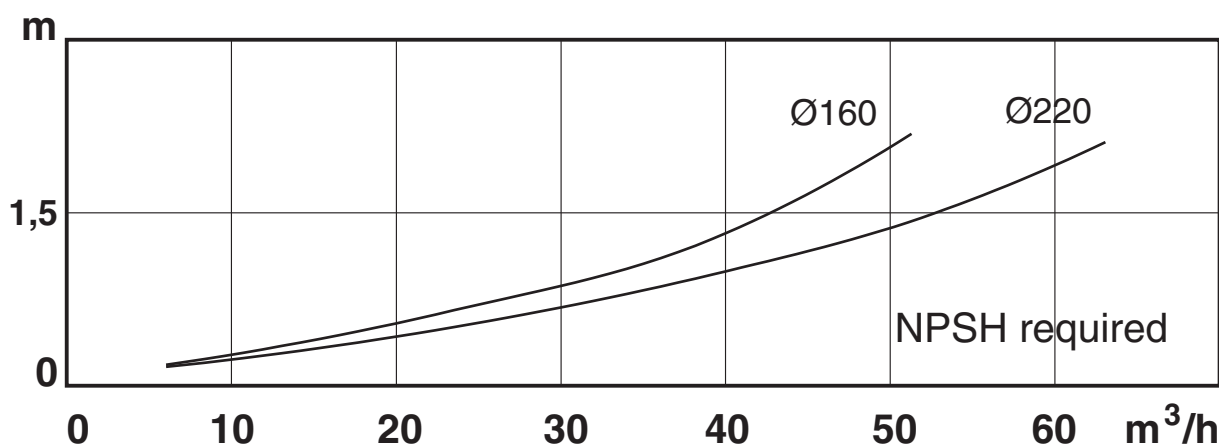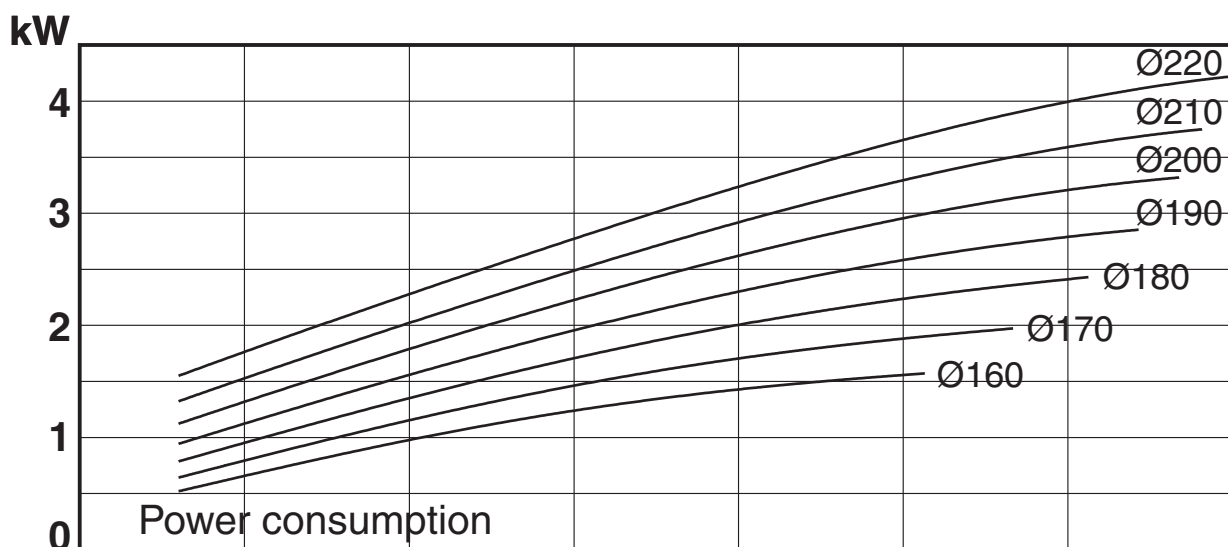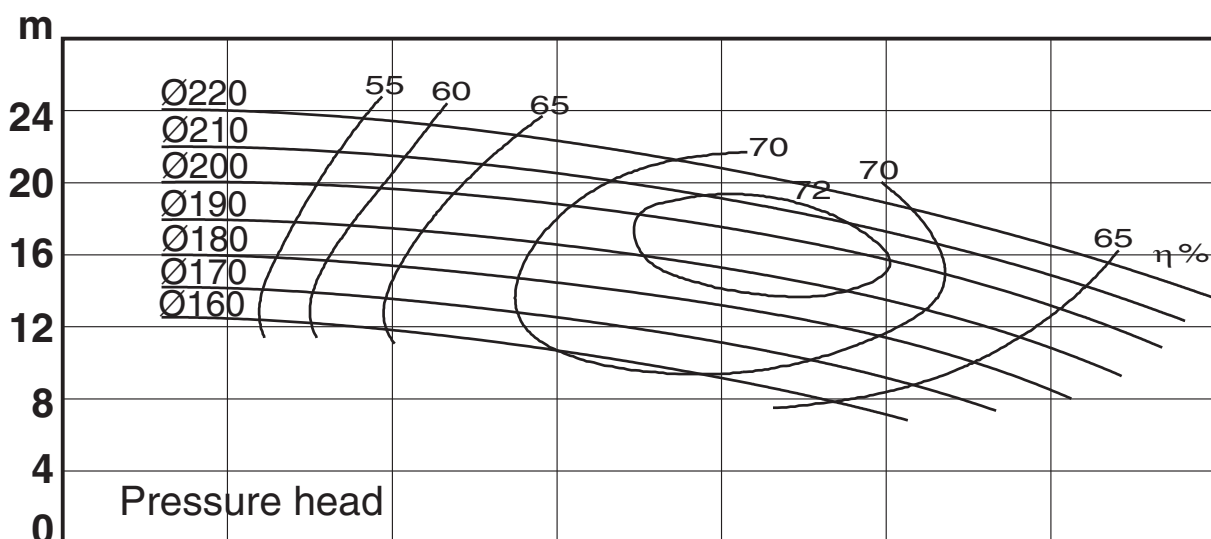

NOTE: _____

Speed: $n=3500 \text{ }^{-1}$ 60 Hz
 Impeller: Max. dia 220 mm
 Min. dia 160 mm
 Pump inlet: 76 mm
 Pump outlet: 51 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

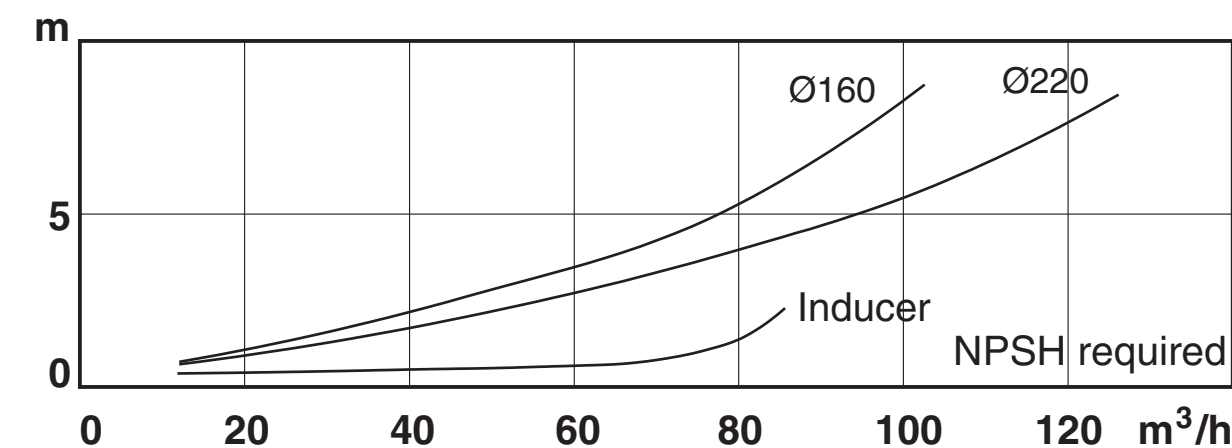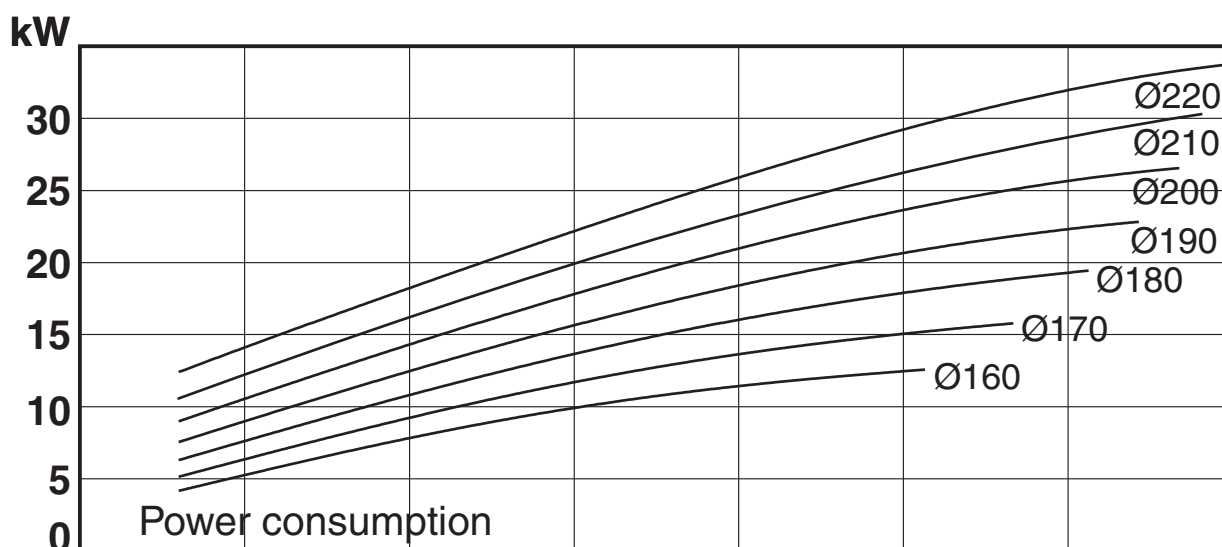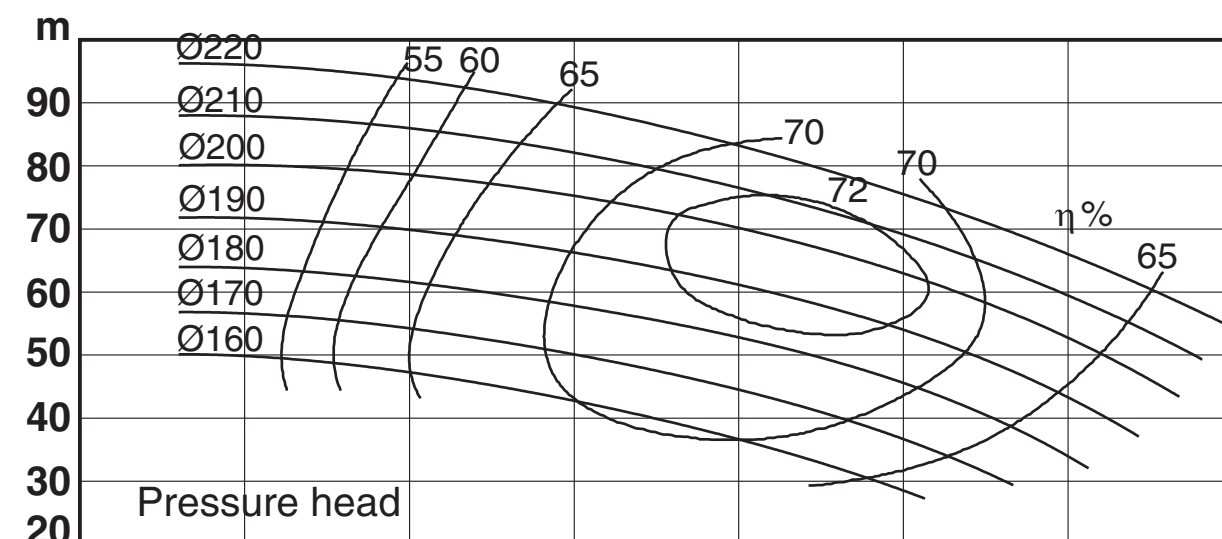

NOTE: _____

Speed: **n=1450⁻¹ 50 Hz**
Impeller: **Max. dia 230 mm**
Min. dia 160 mm
Pump inlet: **101,6 mm**
Pump outlet: **76 mm**




Performance data refer to water at 20°C
Permissible tolerance ±5%

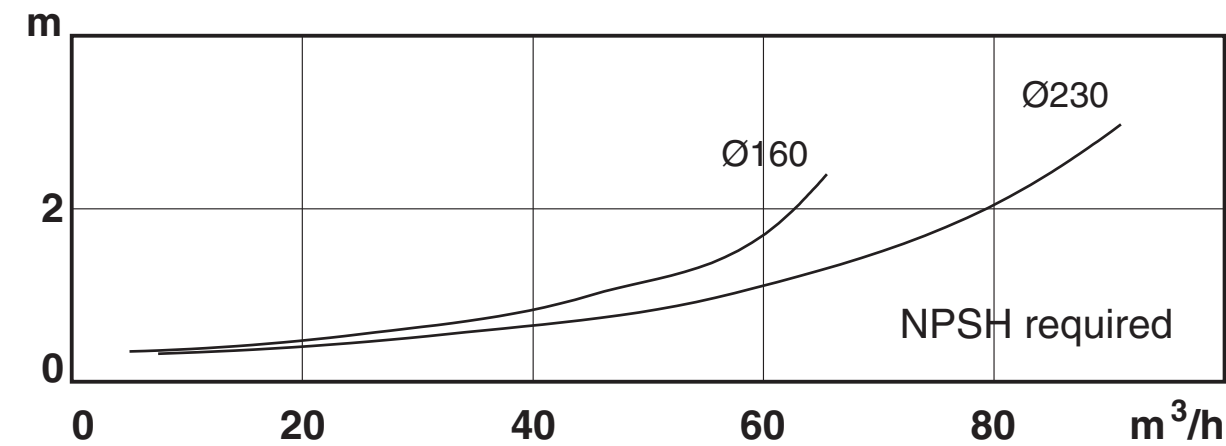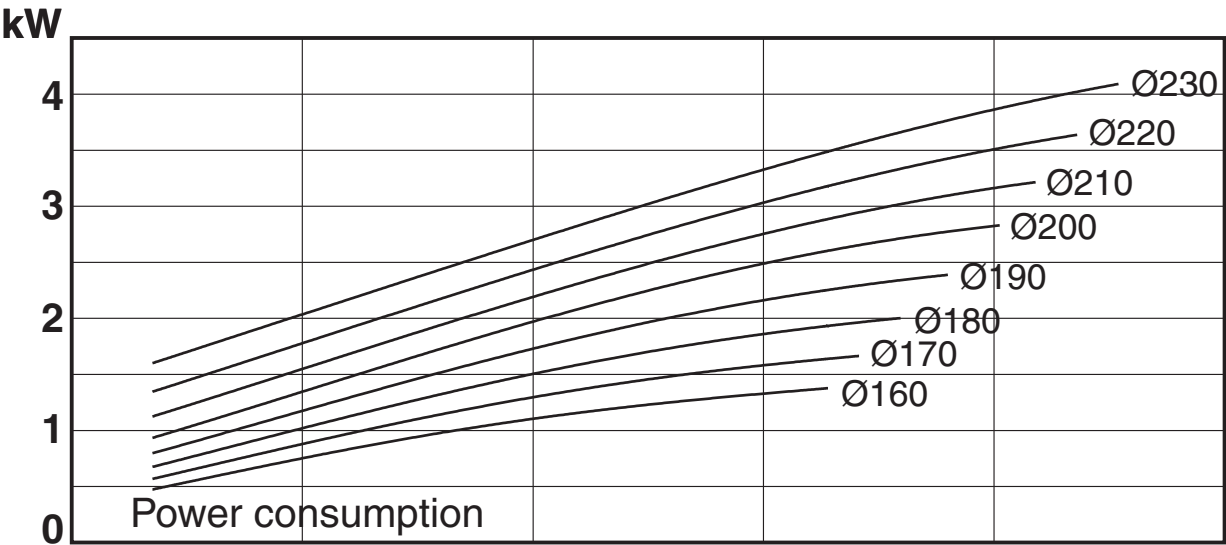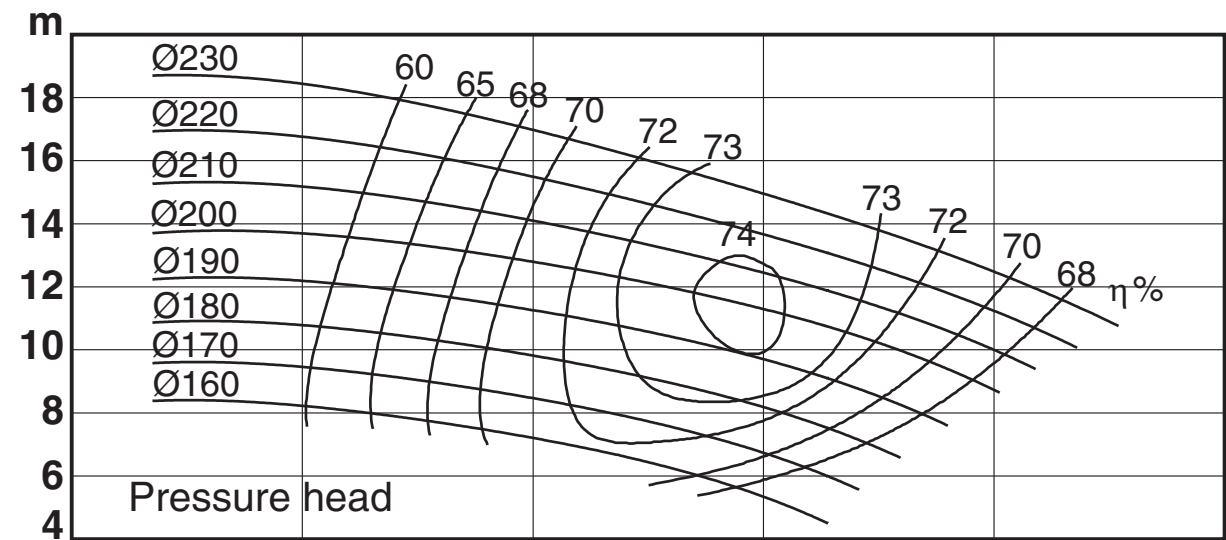

NOTE: _____

Speed: $n=2900 \text{ }^{-1}$ 50 Hz
 Impeller: Max. dia 230 mm
 Min. dia 160 mm
 Pump inlet: 101,6 mm
 Pump outlet: 76 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

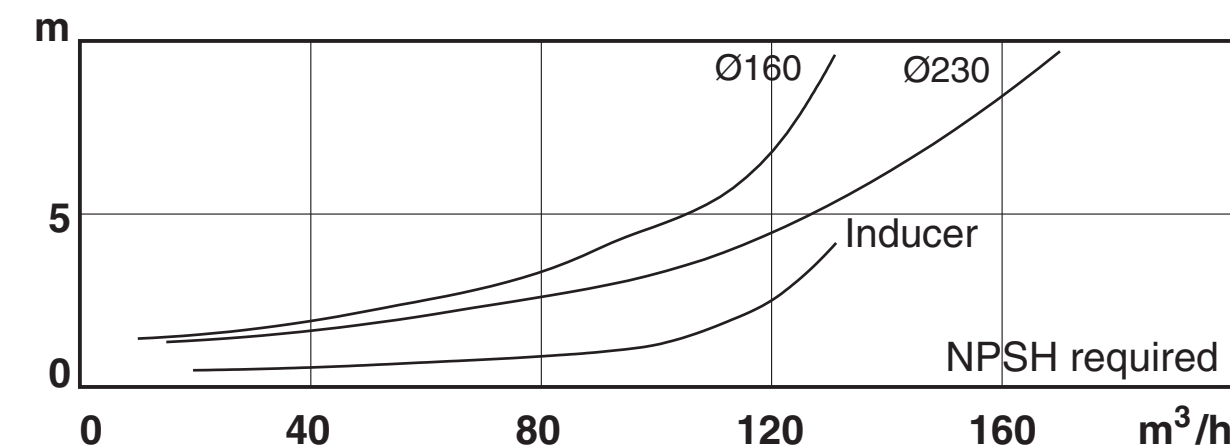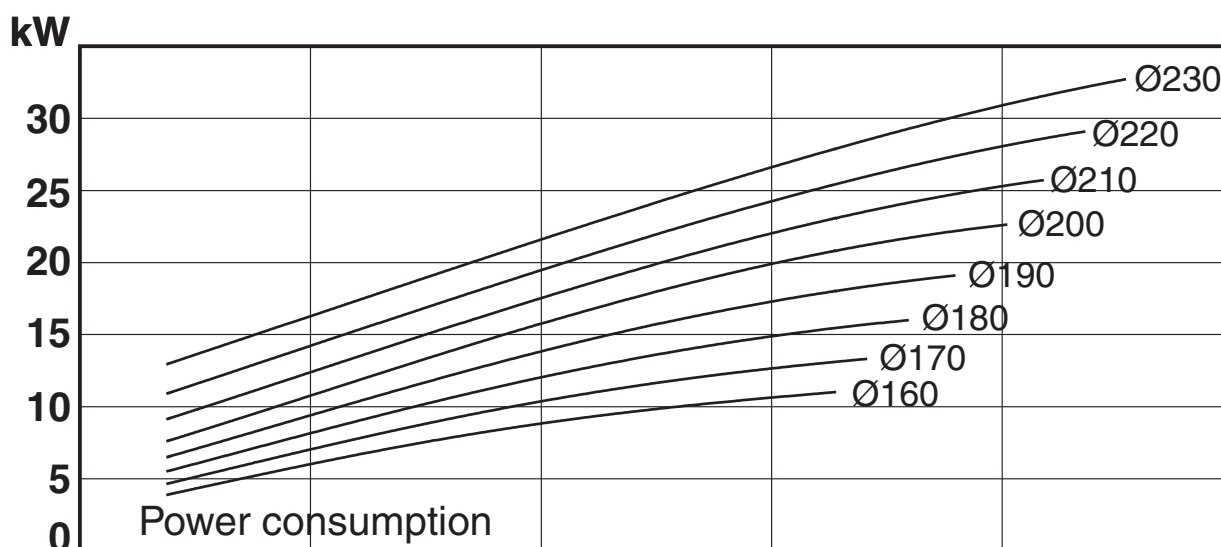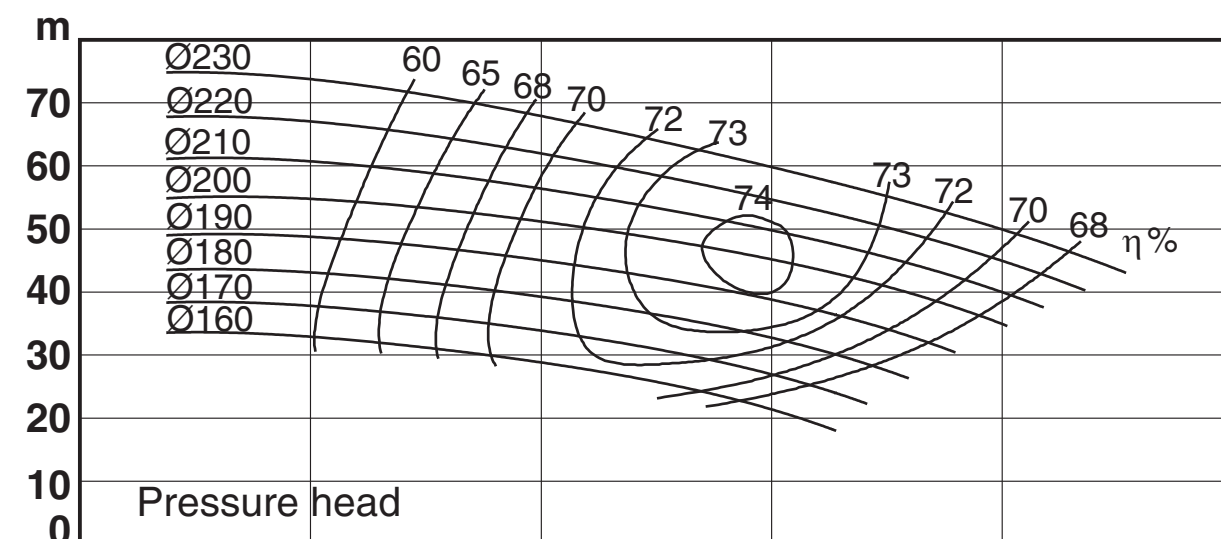

NOTE: _____

Speed: $n=1750^{-1}$ 60 Hz
 Impeller: Max. dia 230 mm
 Min. dia 160 mm
 Pump inlet: 101,6 mm
 Pump outlet: 51 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

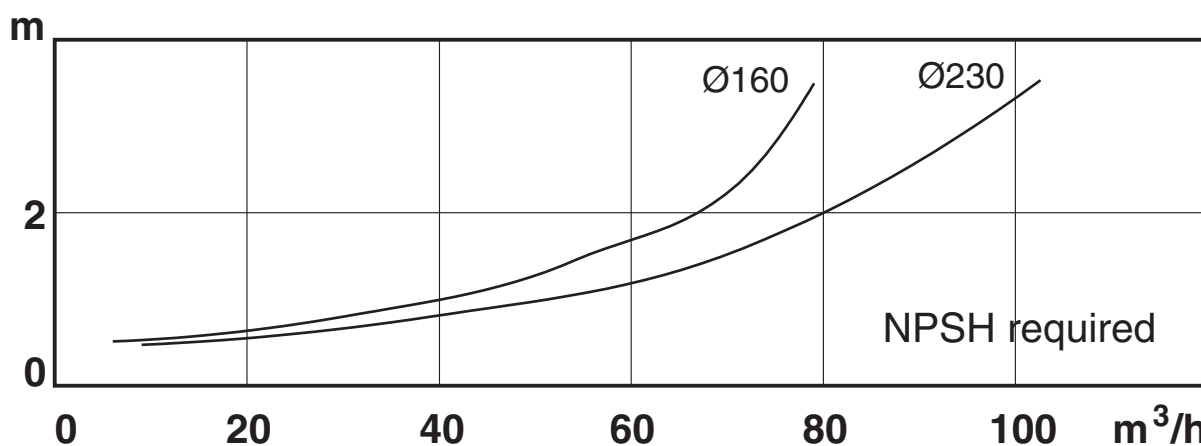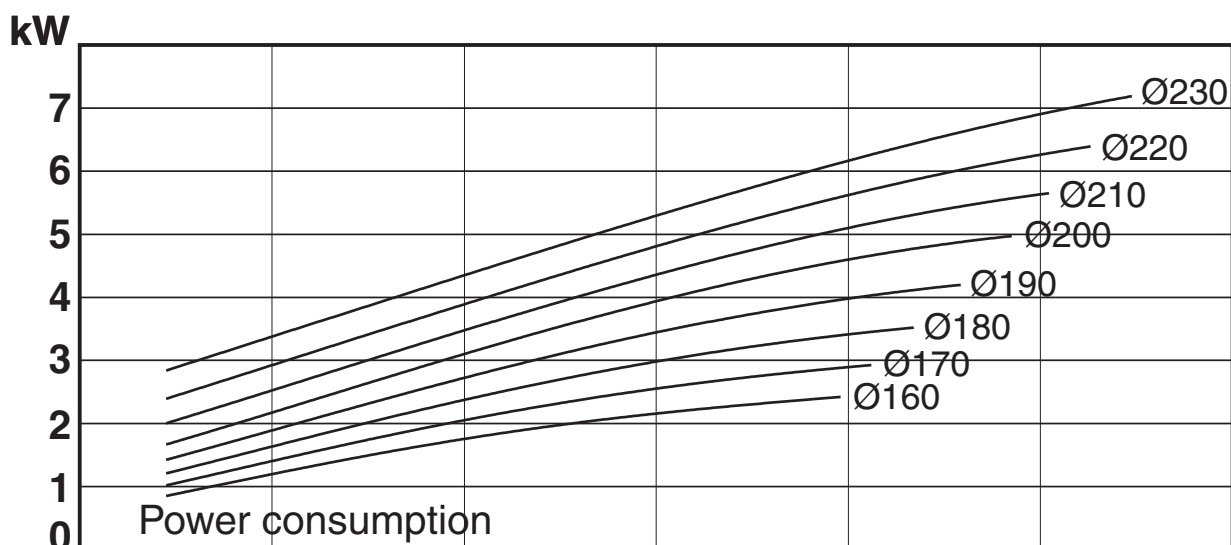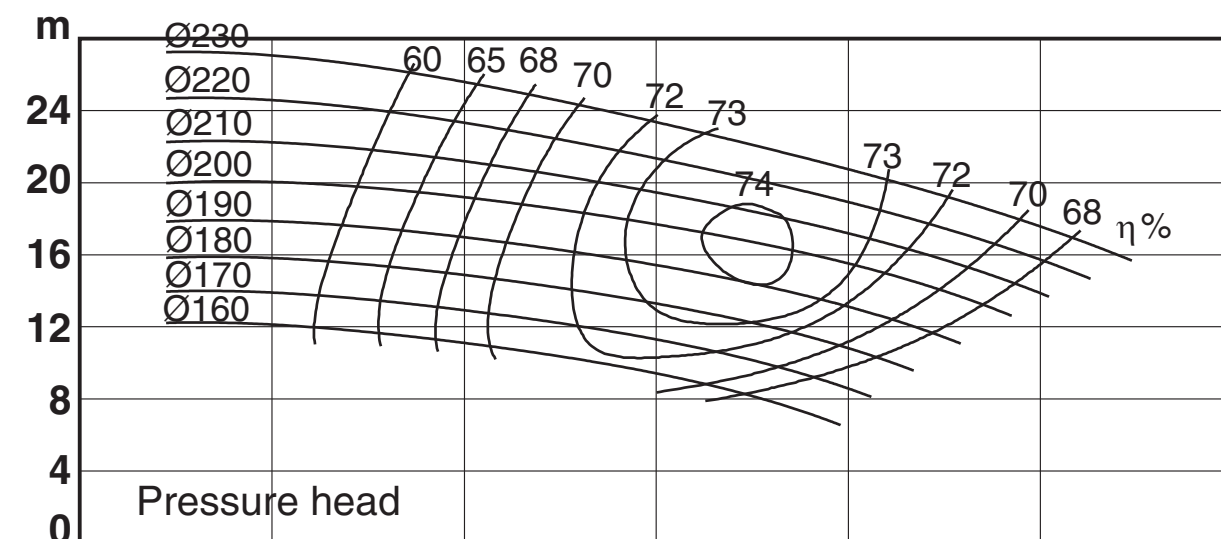

NOTE: _____

Speed: $n=3500 \text{ }^{-1}$ 60 Hz
 Impeller: Max. dia 230 mm
 Min. dia 160 mm
 Pump inlet: 101,6 mm
 Pump outlet: 51 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

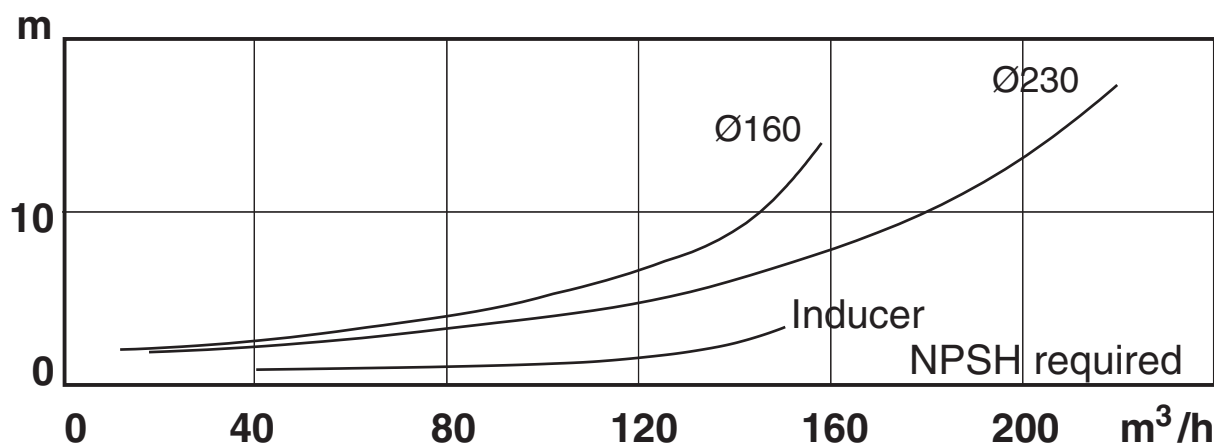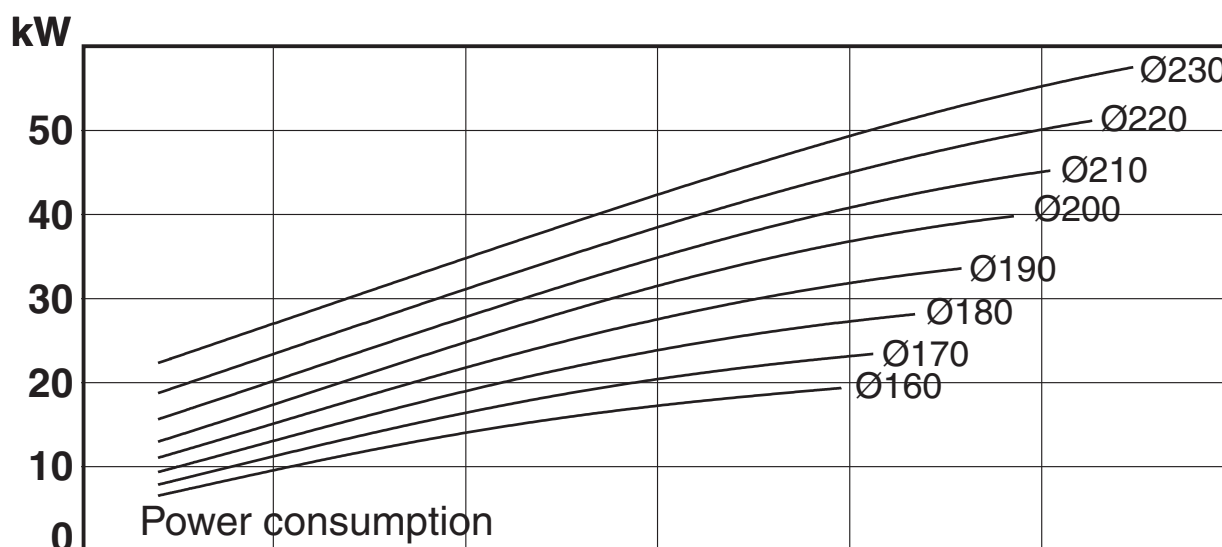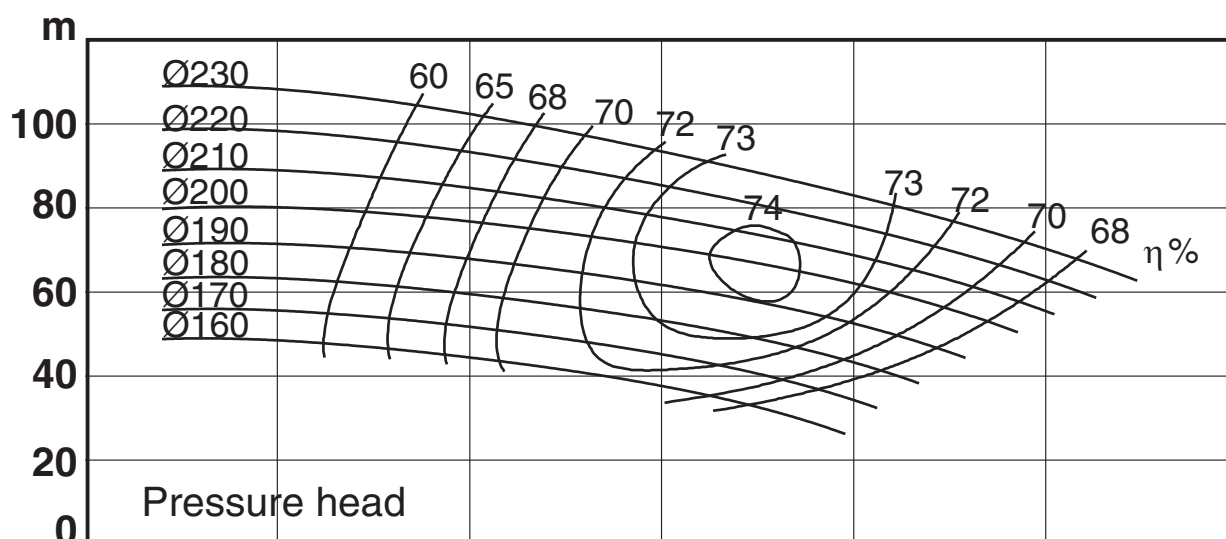

NOTE: _____

Speed: **$n=1450^{-1}$ 50 Hz**
 Impeller: **Max. dia 260 mm**
Min. dia 190 mm
 Pump inlet: **NW 150**
 Pump outlet: **NW 100**




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

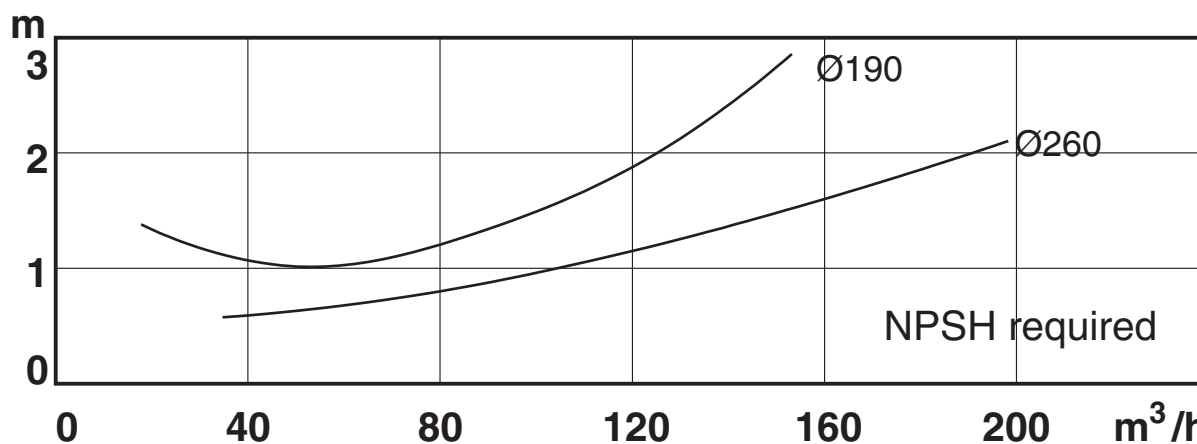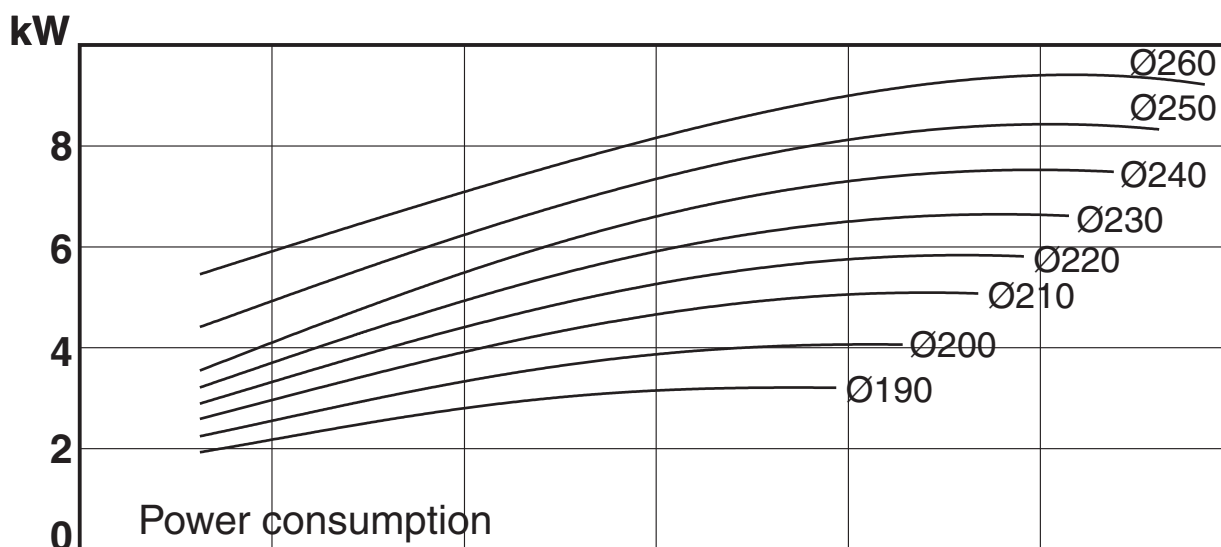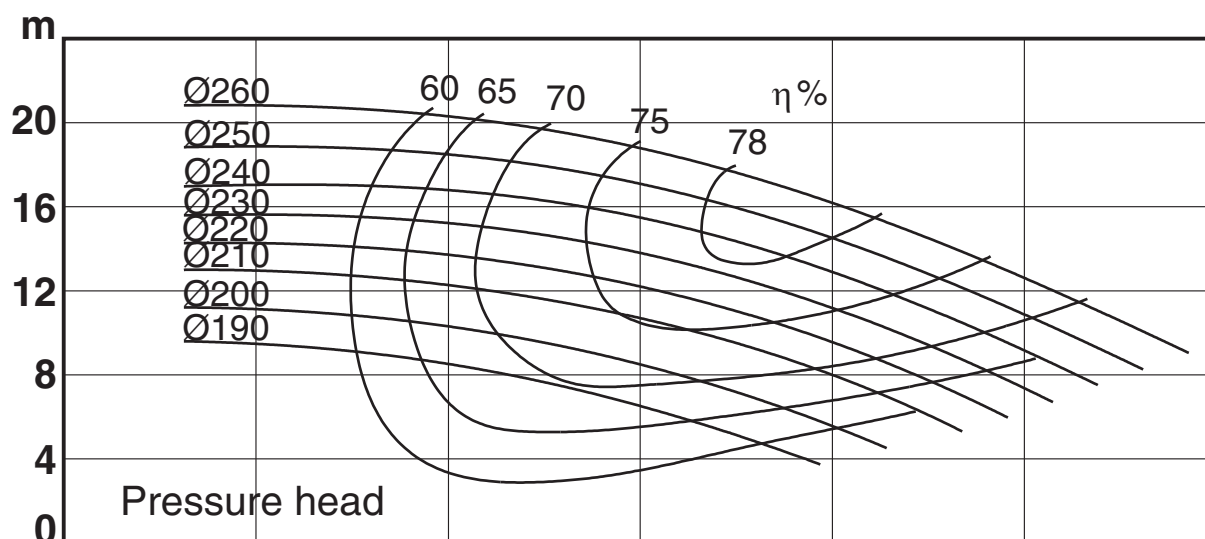

NOTE: _____

Speed: $n=2900 \text{ }^{-1}$ 50 Hz
 Impeller: Max. dia 250 mm
 Min. dia 190 mm
 Pump inlet: NW 150
 Pump outlet: NW 100




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

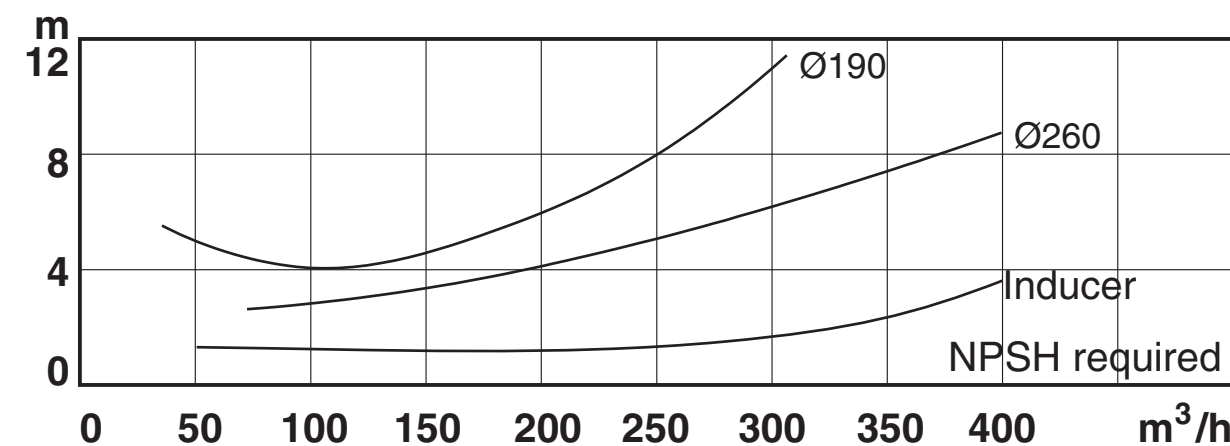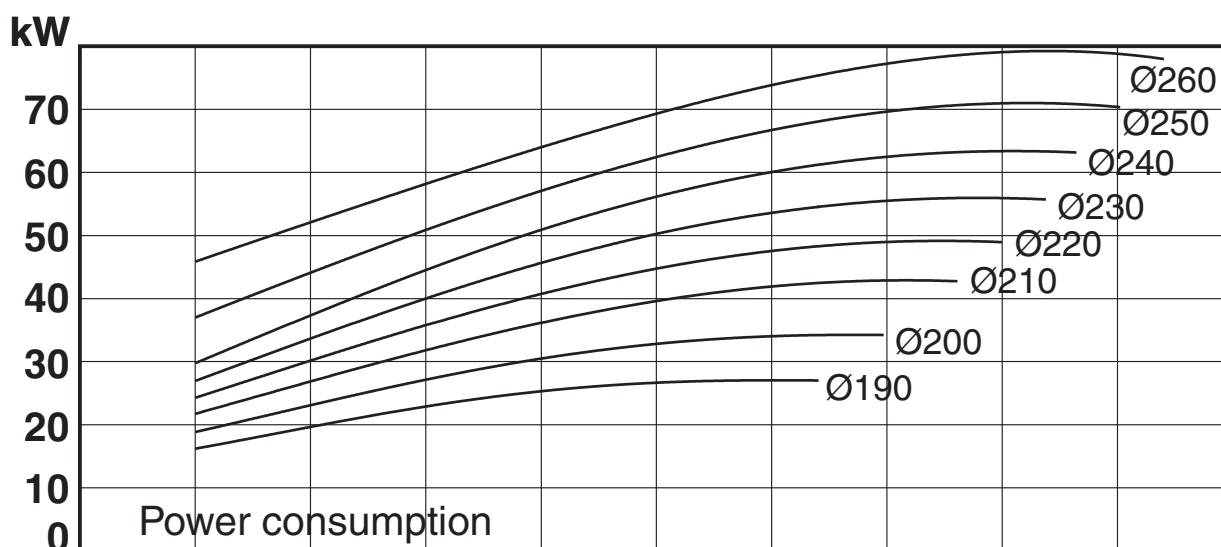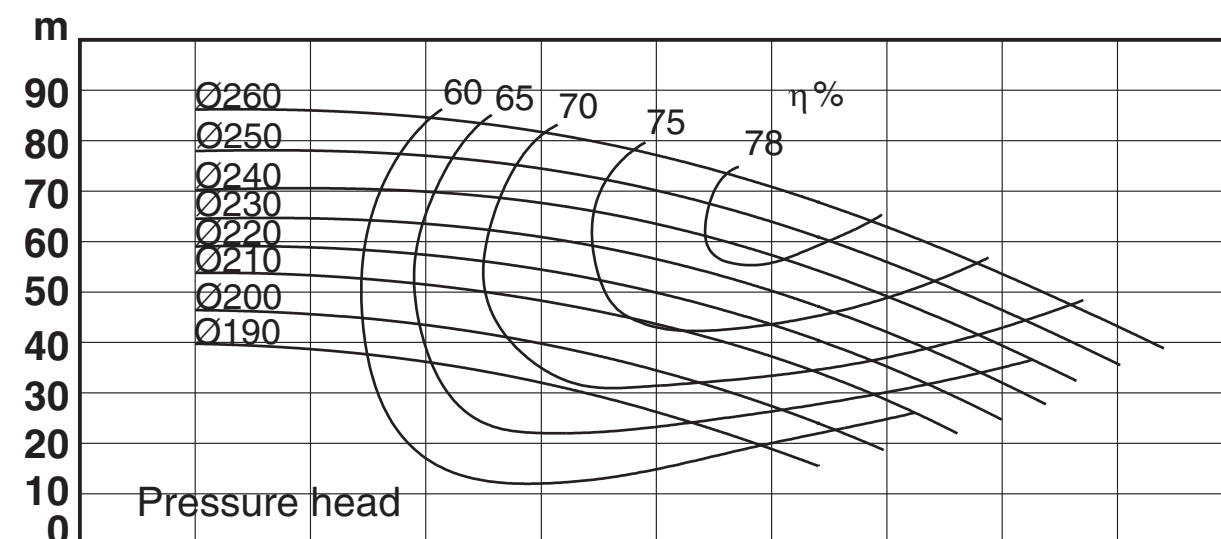

NOTE: _____

Speed: **$n=1750^{-1}$ 60 Hz**
 Impeller: **Max. dia 250 mm**
Min. dia 190 mm
 Pump inlet: **NW 150**
 Pump outlet: **NW 100**




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

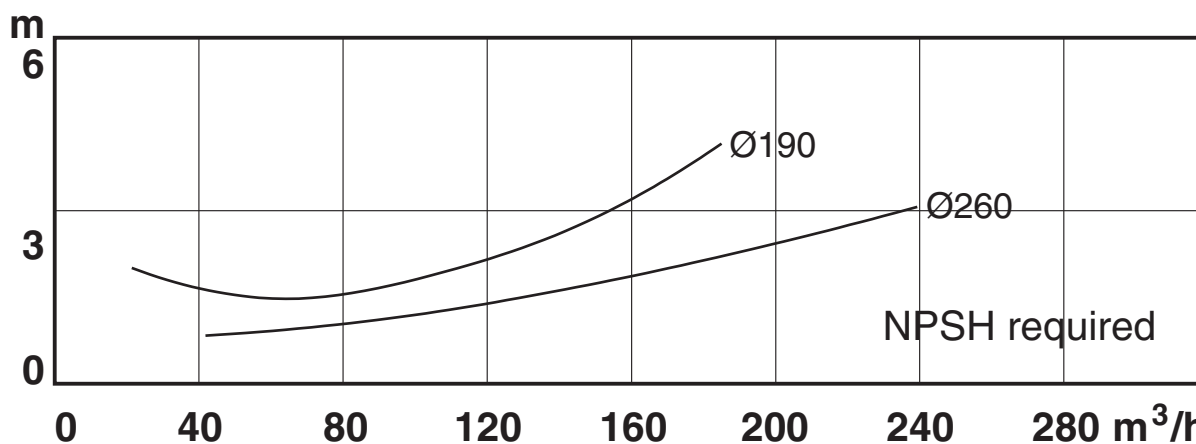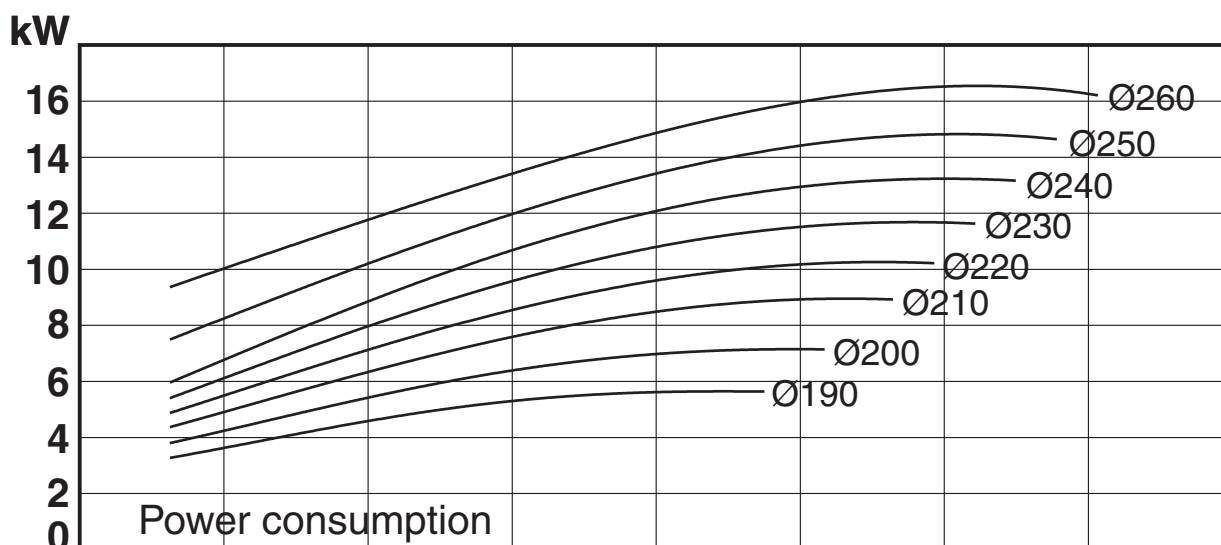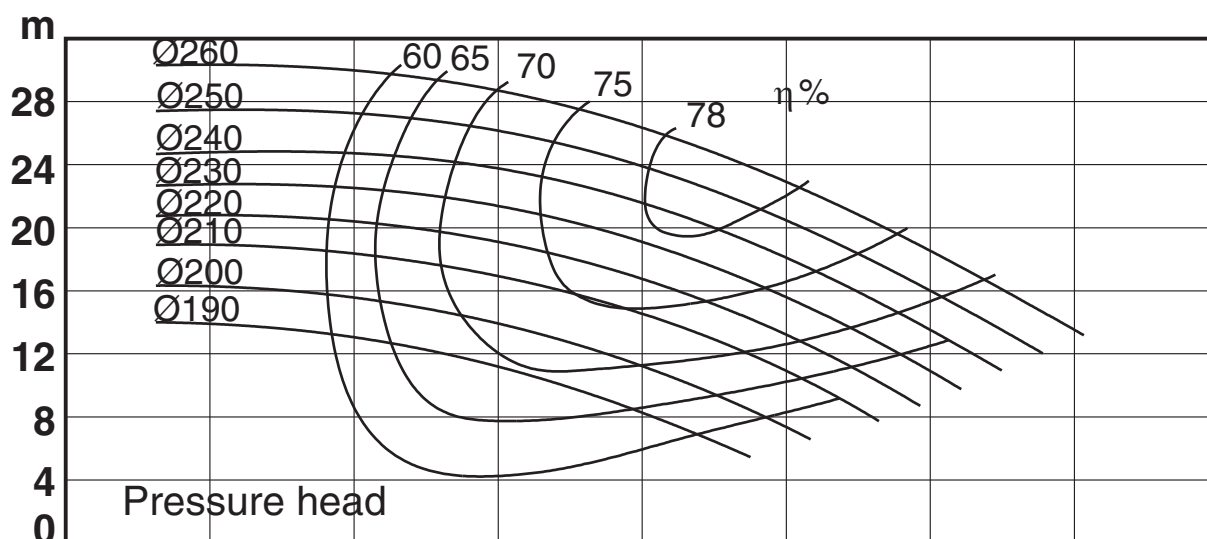

NOTE: _____

Speed: **n=3500⁻¹ 60 Hz**
Impeller: **Max. dia 250 mm**
Min. dia 190 mm
Pump inlet: **NW 150**
Pump outlet: **NW 100**




Performance data refer to water at 20°C
Permissible tolerance ±5%

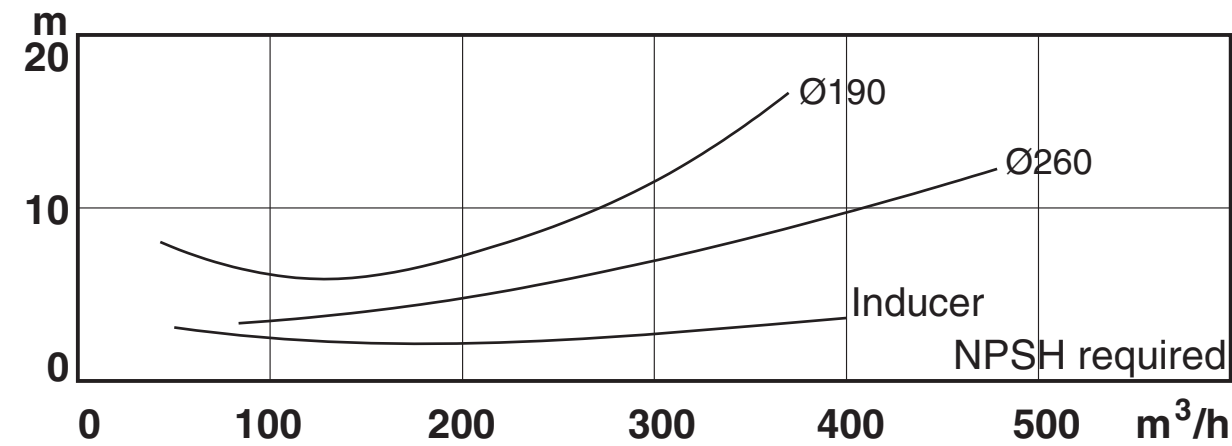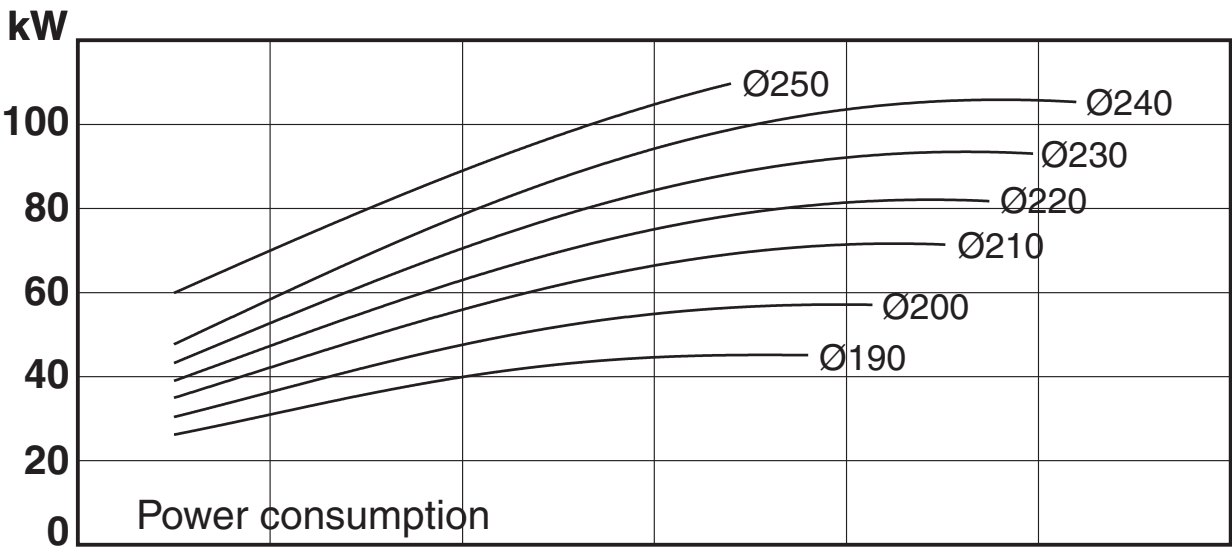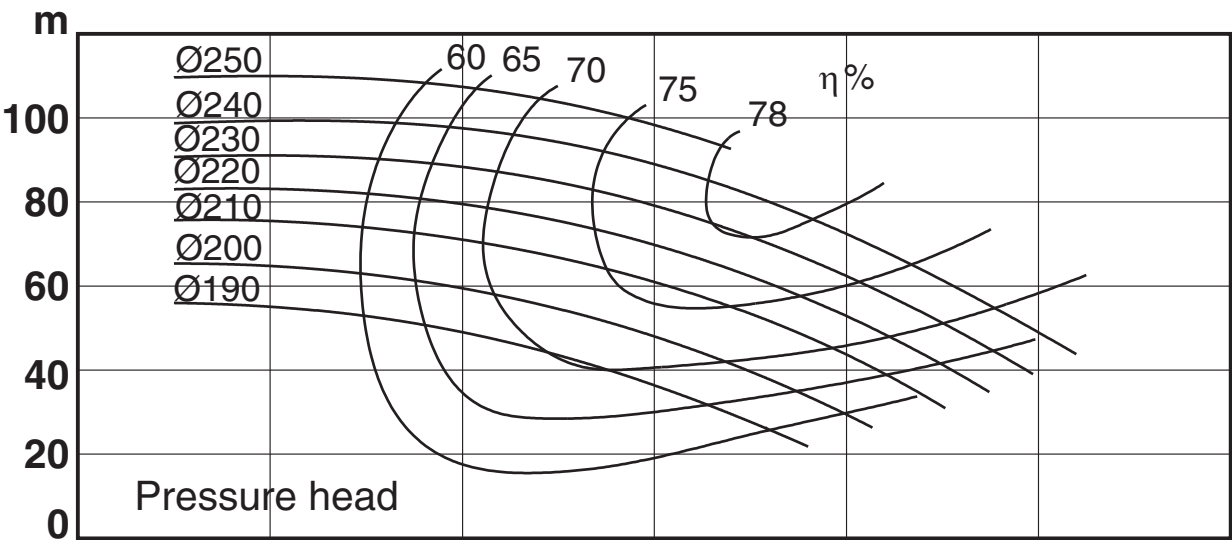

NOTE: _____

Speed: **$n=1450^{-1}$ 50 Hz**
 Impeller: **Max. dia 240 mm**
Min. dia 190 mm
 Pump inlet: **63,5 mm**
 Pump outlet: **38 mm**




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

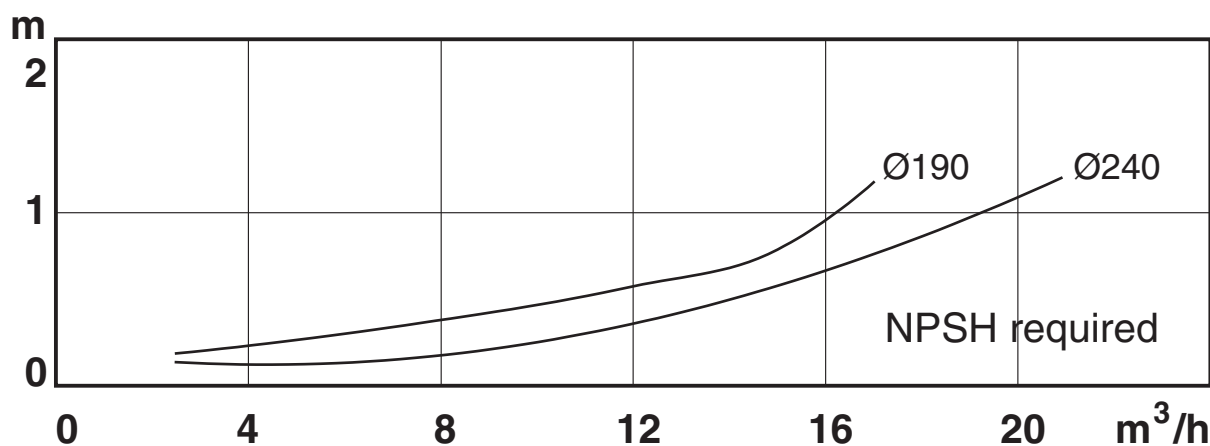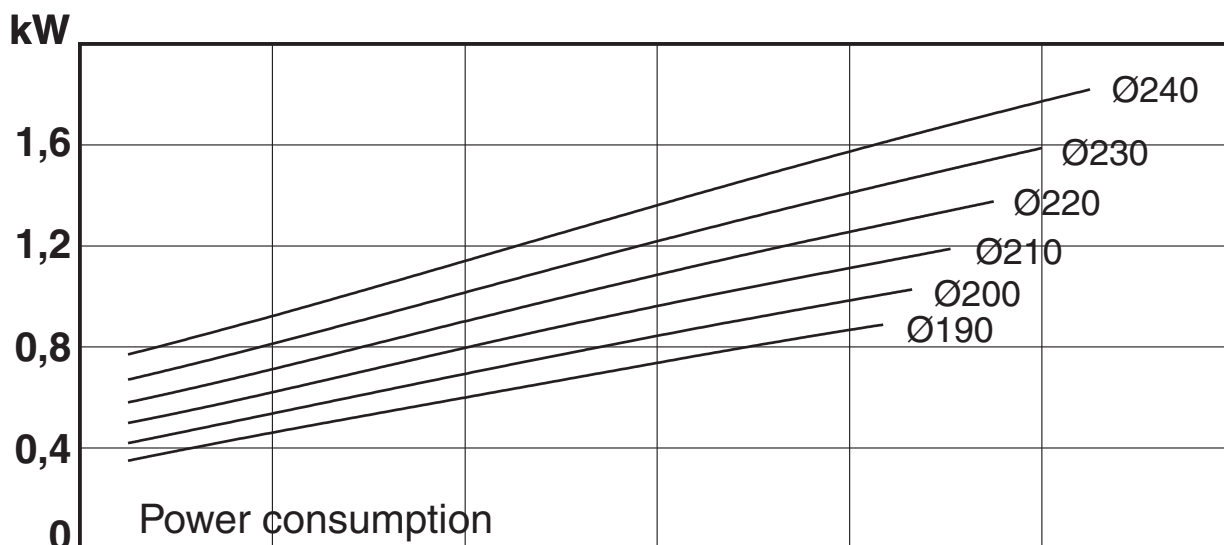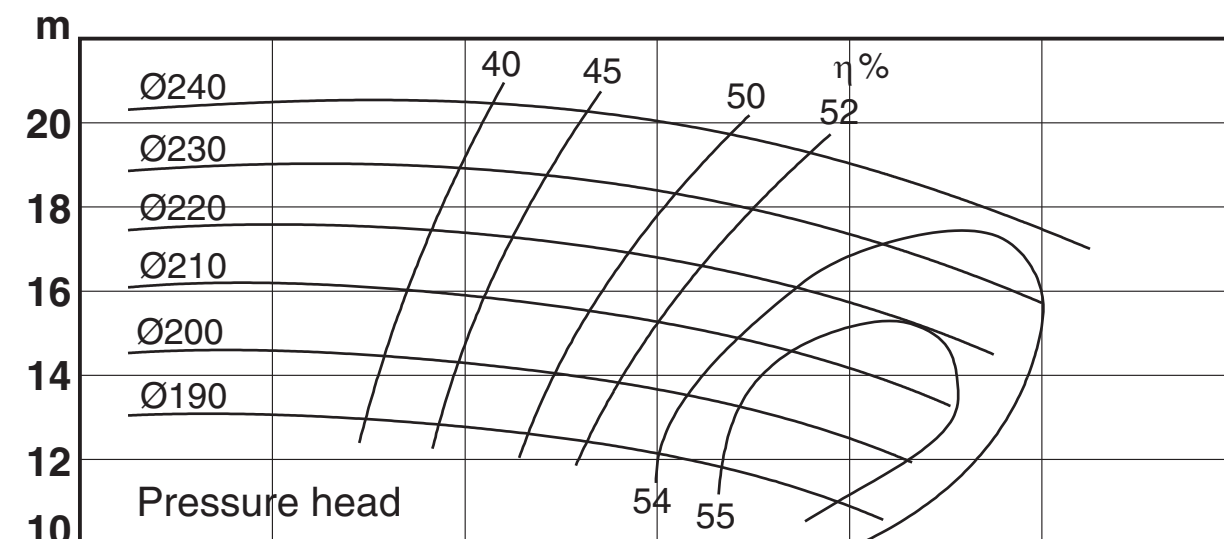

NOTE: _____

Speed: $n=2900 \text{ }^{-1}$ 50 Hz
 Impeller: Max. dia 240 mm
 Min. dia 190 mm
 Pump inlet: 63,5 mm
 Pump outlet: 38 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

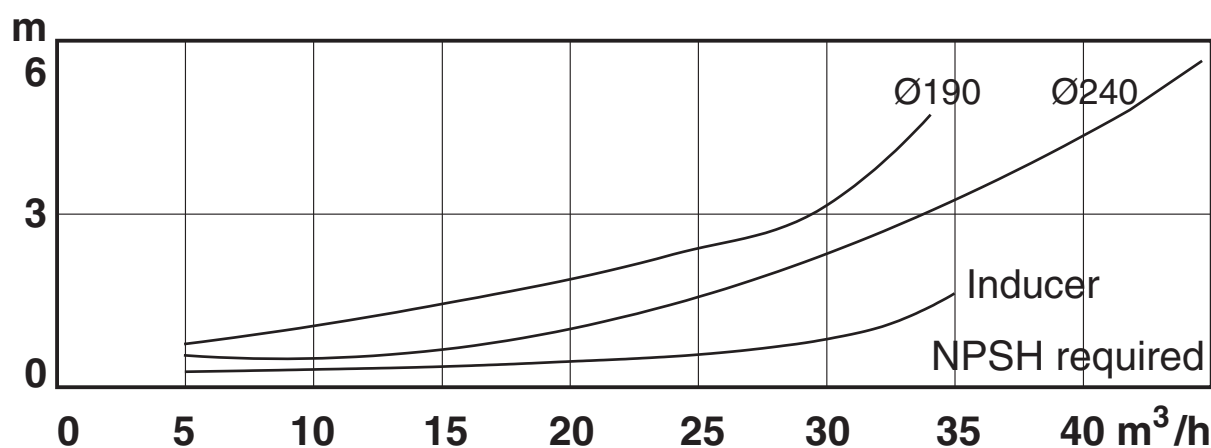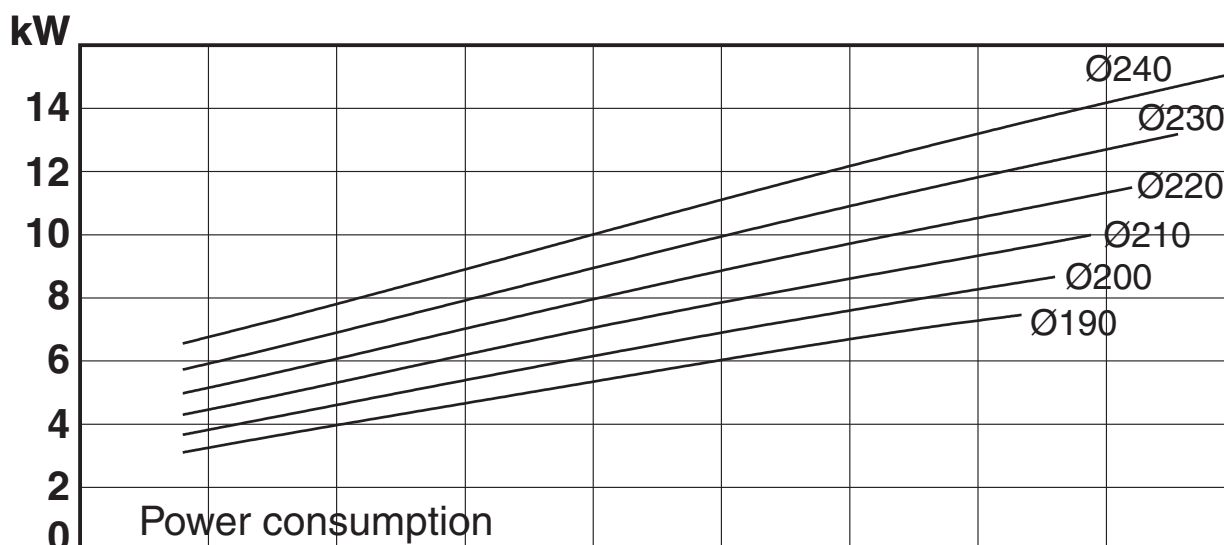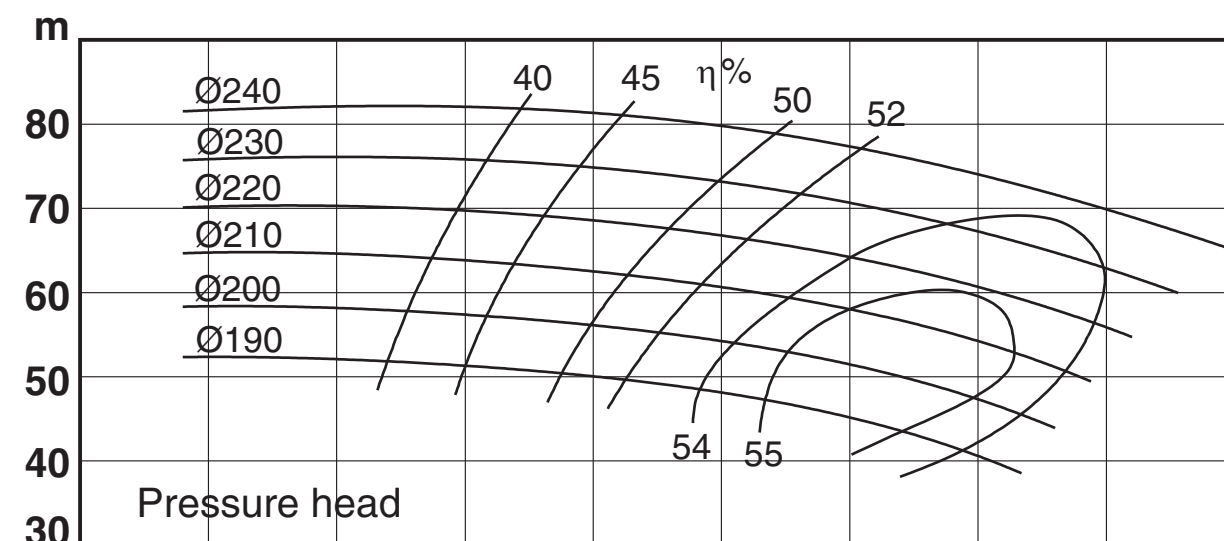

NOTE: _____

Speed: $n=1750^{-1}$ 60 Hz
 Impeller: Max. dia 240 mm
 Min. dia 190 mm
 Pump inlet: 63,5 mm
 Pump outlet: 38 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

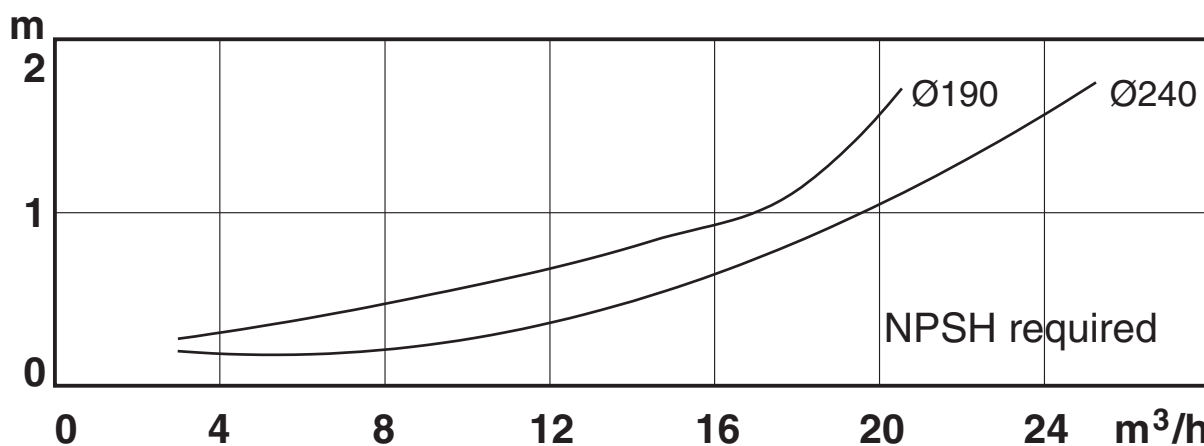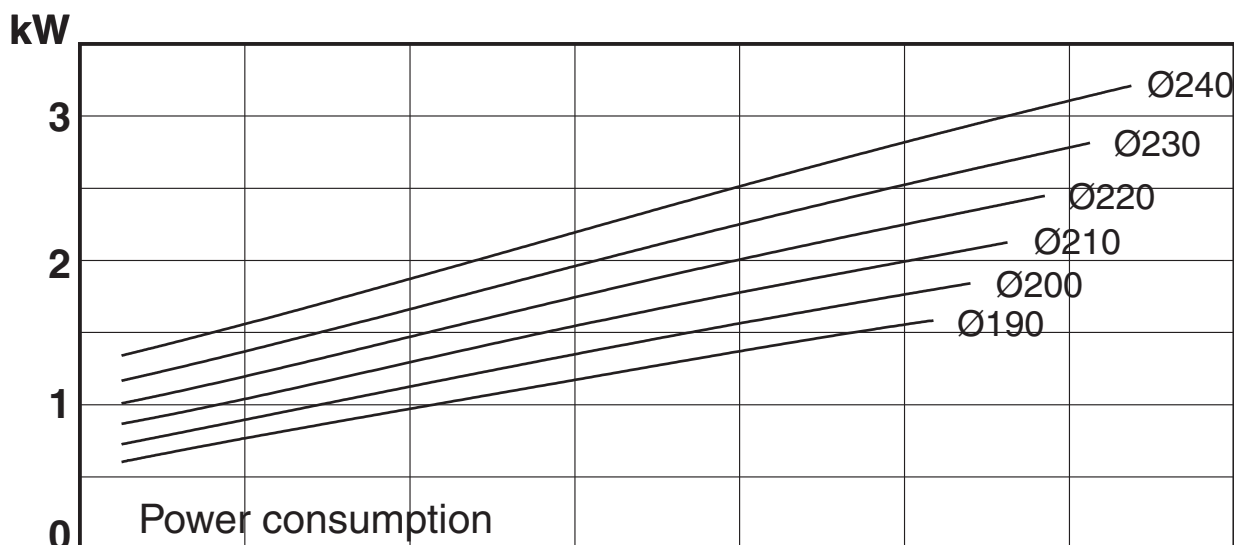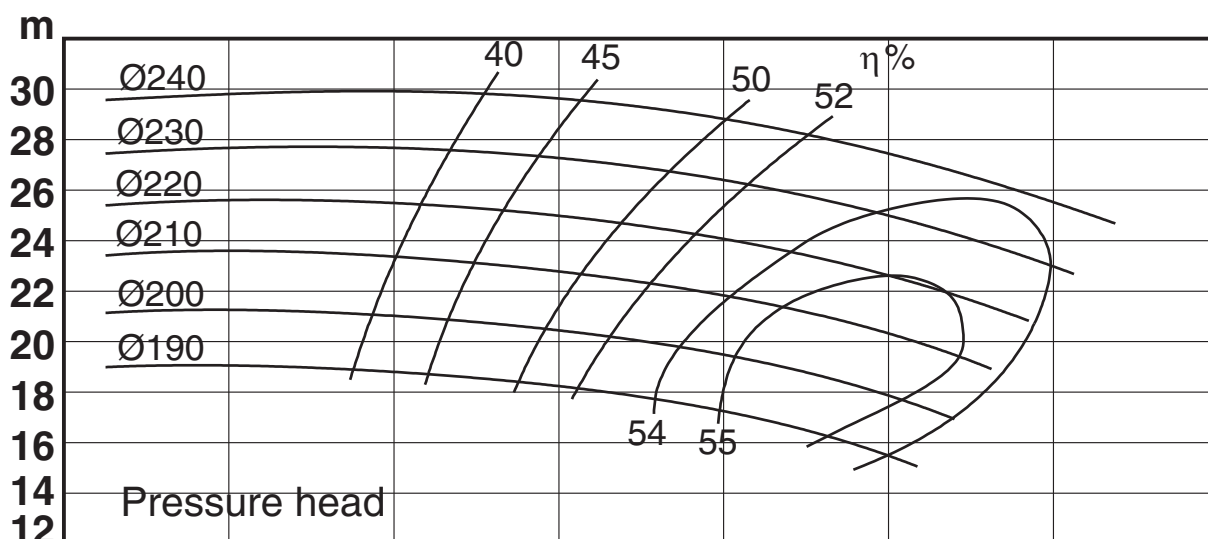

NOTE: _____

Speed: $n=3500 \text{ }^{-1}$ 60 Hz
 Impeller: Max. dia 240 mm
 Min. dia 190 mm
 Pump inlet: 63,5 mm
 Pump outlet: 38 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

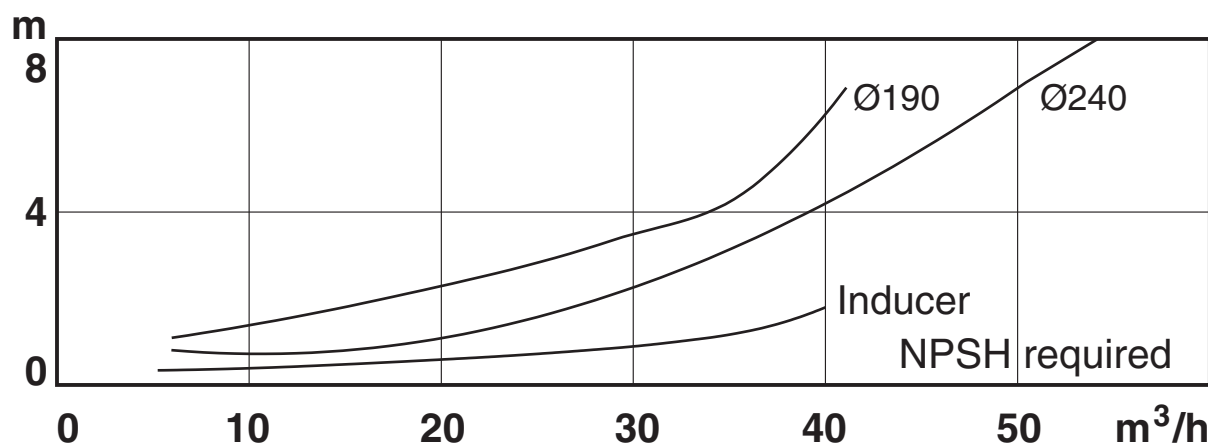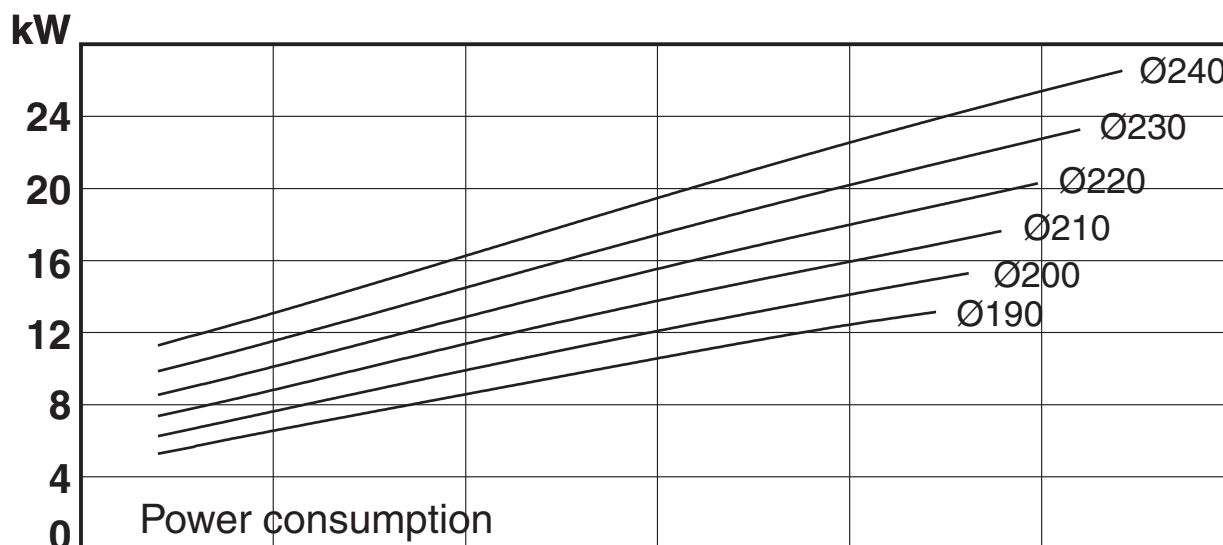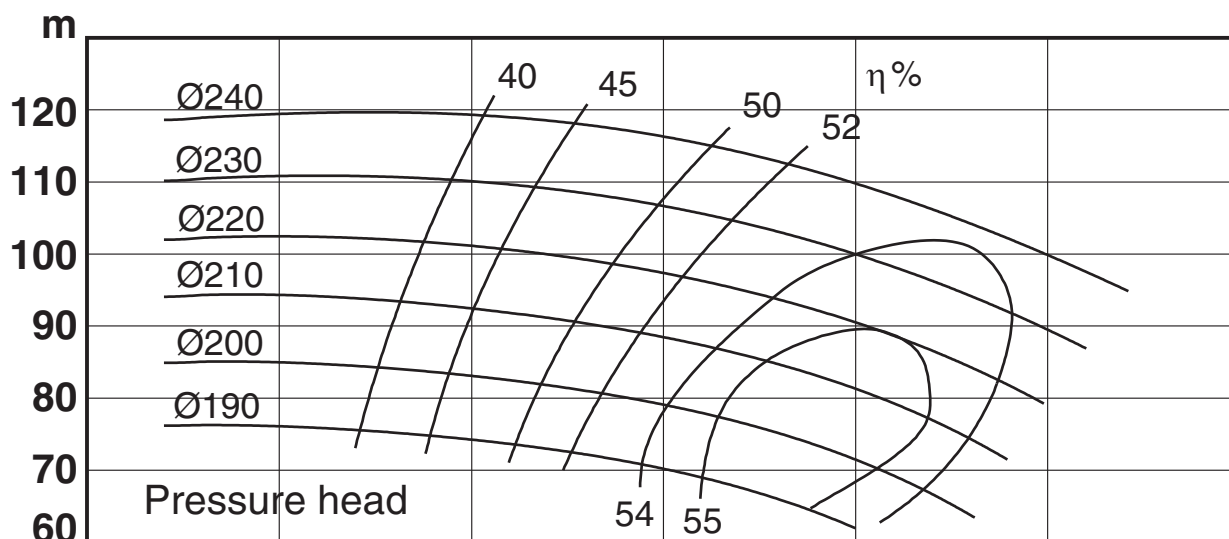

NOTE: _____

Speed: $n=2950^{-1}$ 50 Hz
 Impeller: Max. dia 200 mm
 Min. dia 160 mm
 Pump inlet: 76 mm
 Pump outlet: 51 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

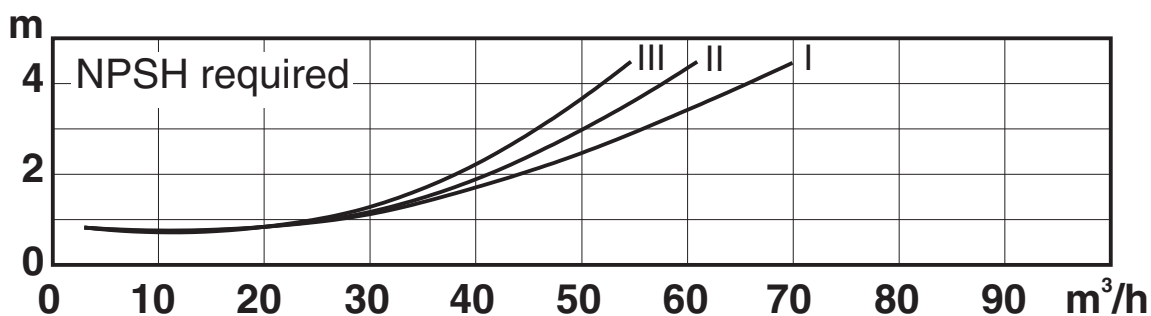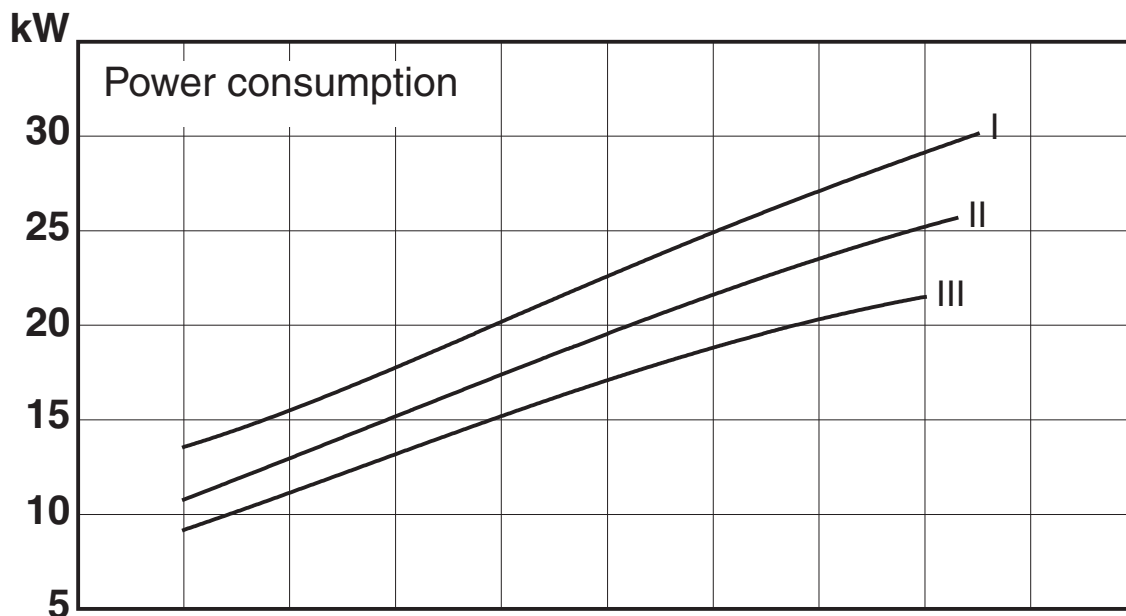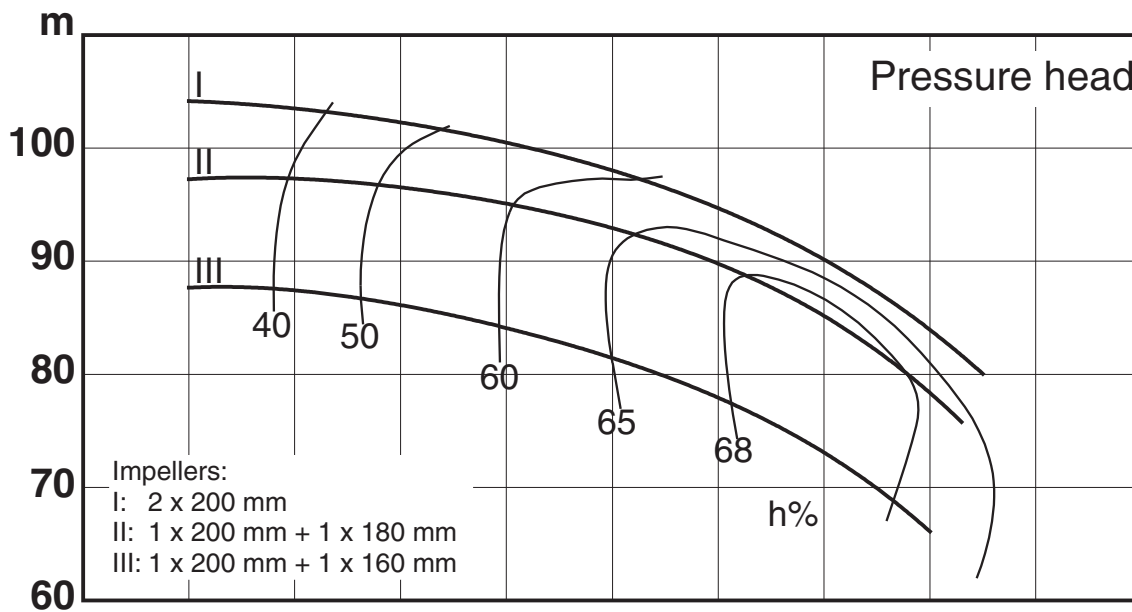

NOTE: _____

Speed: $n=3500 \text{ }^{-1}$ 60 Hz
 Impeller: Max. dia 200 mm
 Min. dia 160 mm
 Pump inlet: 76 mm
 Pump outlet: 51 mm




Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

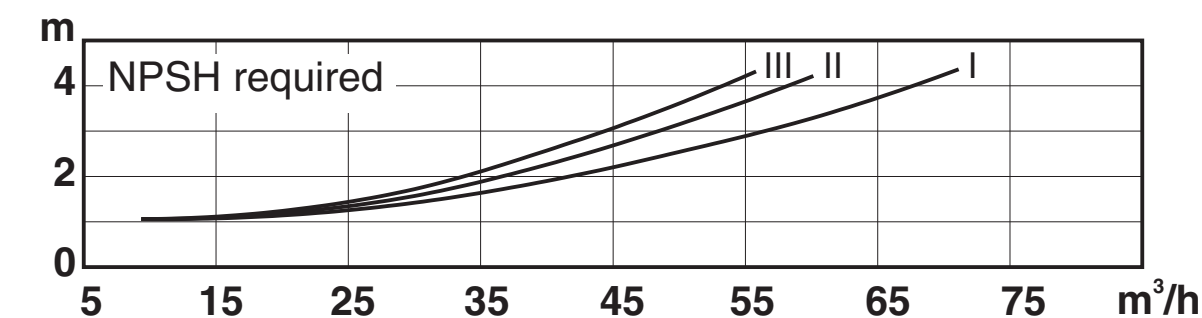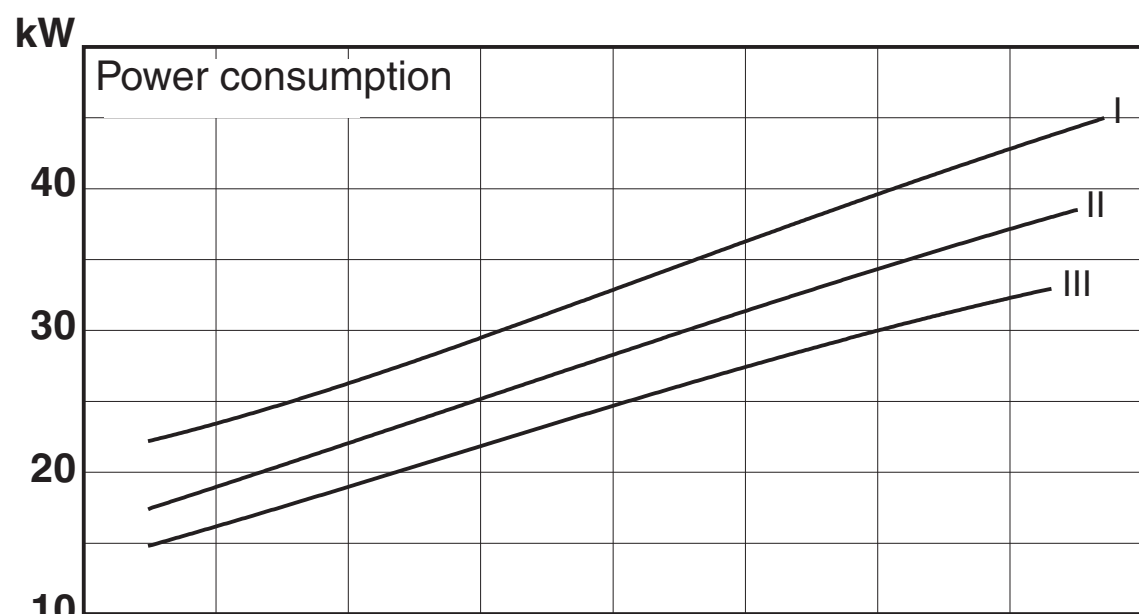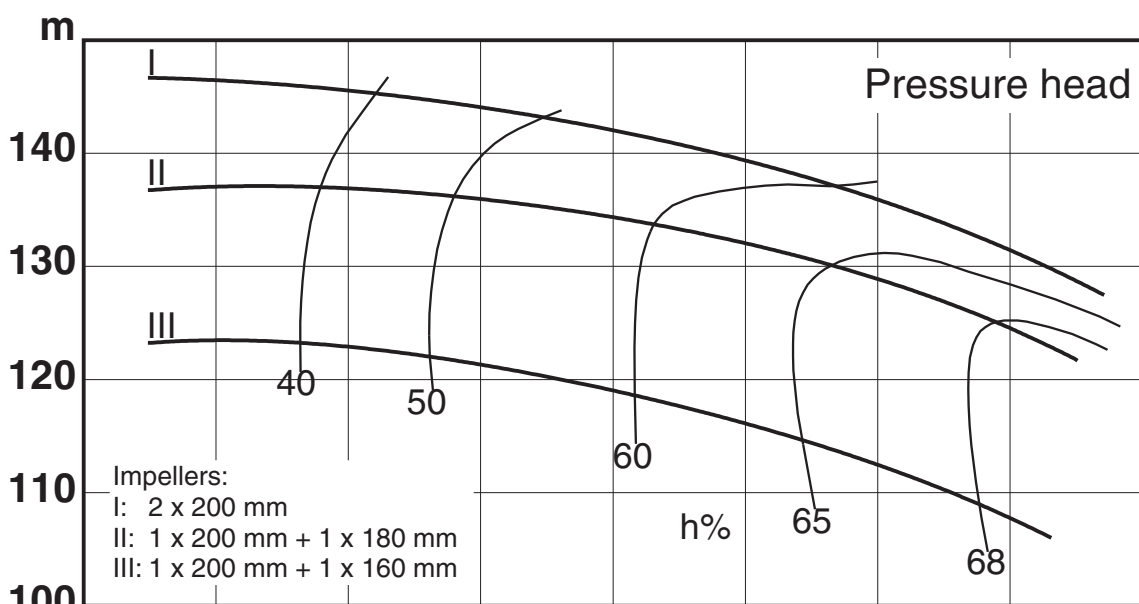

NOTE: _____

Speed: **$n=2950^{-1}$** 50 Hz
 Impeller: **Max. dia 200 mm**
Min. dia 160 mm
 Pump inlet: **76 mm**
 Pump outlet: **51 mm**

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

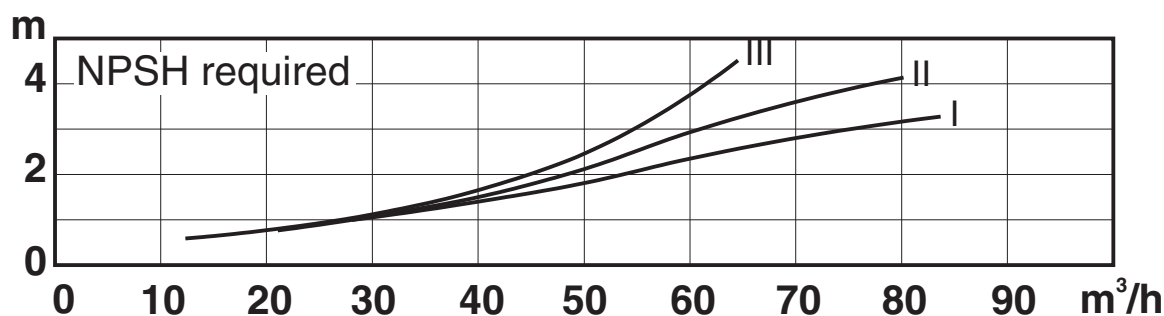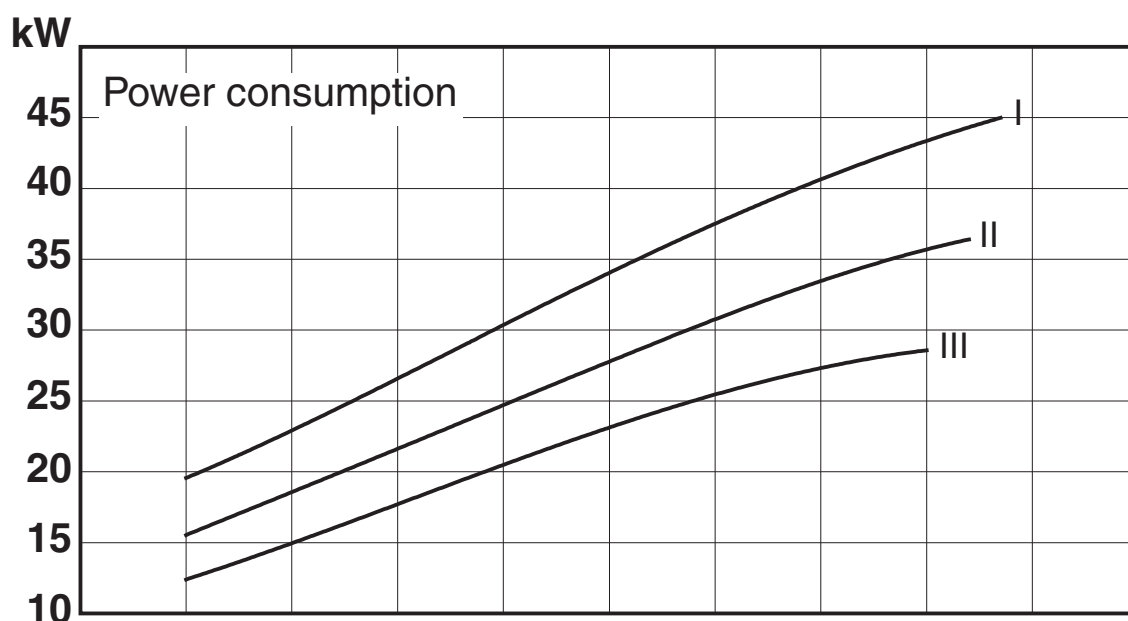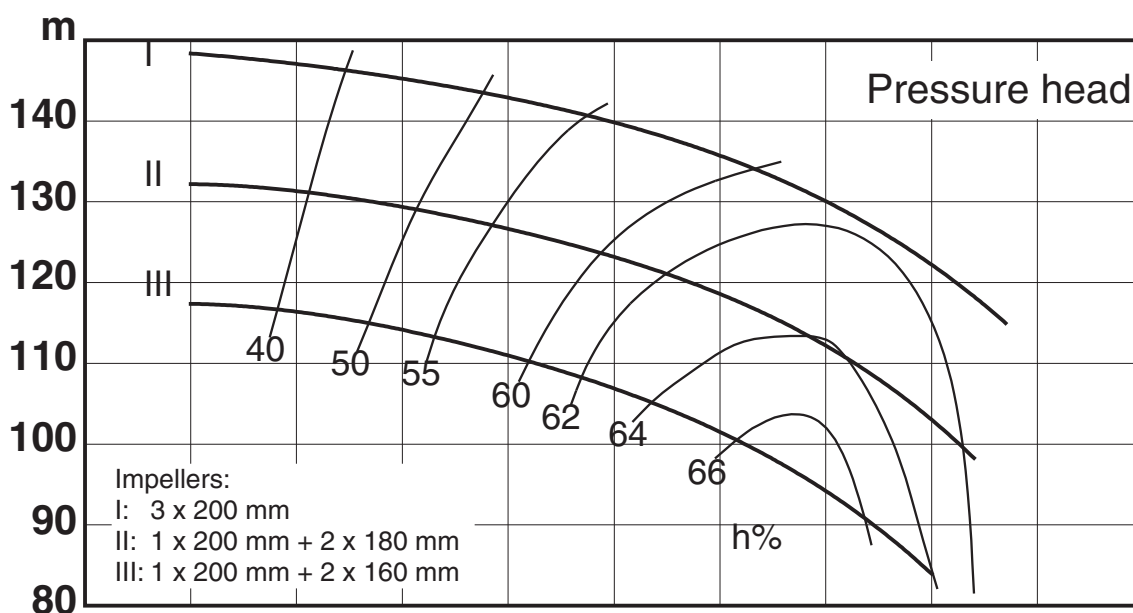

NOTE: _____

Speed: $n=3500 \text{ }^{-1}$ 60 Hz
 Impeller: Max. dia 200 mm
 Min. dia 160 mm
 Pump inlet: 76 mm
 Pump outlet: 51 mm

Performance data refer to water at 20°C
 Permissible tolerance $\pm 5\%$

